


CONTENT

A-Z

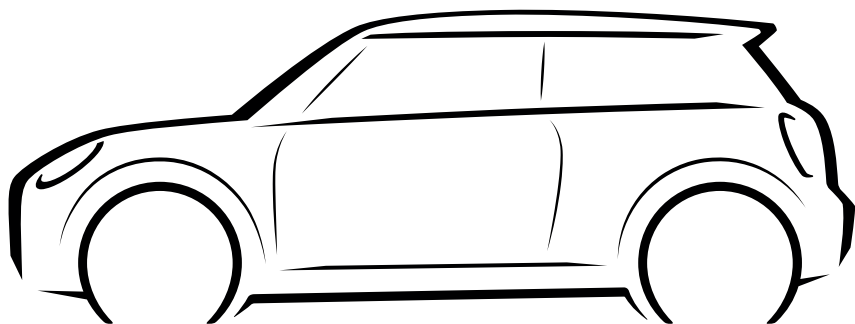

MINI ELECTRIC

---

**OWNER'S MANUAL.**  
**MINI COOPER SE.**







## **WELCOME TO MINI.**

### **OWNER'S MANUAL.**

Thank you for choosing a MINI.

The more familiar you are with the vehicle, the better control you will have on the road. We therefore strongly suggest the following:

Read this Owner's Manual before starting off in your new MINI. Also use the Integrated Owner's Manual in the vehicle. It contains important notes on vehicle operation that will help you make full use of the technical features available in your MINI. The manual also contains information designed to enhance operating reliability and traffic safety, and to contribute to maintaining the value of your MINI.

Any updates made after the editorial deadline can be found in the appendix of the printed Owner's Manual for the vehicle.

Get started now. We wish you driving fun and inspiration with your MINI.

# TABLE OF CONTENTS

Navigation, Entertainment and Communication can be called up via the Integrated Owner's Manual in the vehicle.

## NOTES

Information.....	6
------------------	---

## QUICK REFERENCE

Getting in.....	16
Set-up and use.....	20
On the road.....	24

## AT A GLANCE

Dashboard.....	32
Central Information Display (CID).....	36
Voice activation system.....	44
General settings.....	47
MINI eDRIVE.....	59
Safety of the high-voltage system.....	62

## CONTROLS

Opening and closing.....	64
Seats, mirrors and steering wheel.....	83
Transporting children safely.....	94
Driving.....	99
Displays.....	117
Lights.....	135
Safety.....	141
Driving stability control systems.....	166
Driving comfort.....	171
Climate control.....	191

Interior equipment.....	198
Storage compartments.....	209
Cargo area.....	212

## **DRIVING TIPS**

Things to remember when driving.....	218
Increasing range.....	222

## **MOBILITY**

Charging the vehicle.....	228
Wheels and tires.....	240
Engine compartment.....	256
Coolant.....	259
Maintenance.....	261
Replacing components.....	263
Breakdown Assistance.....	269
Vehicle Care.....	275

## **REFERENCE**

Technical data.....	280
Appendix.....	282
Everything from A to Z.....	284

# Information

## Using this Owner's Manual

---

### Orientation

The fastest way to find information on a particular topic is by using the index.

For an overview of the vehicle, we recommend reading the quick reference guide in the owner's manual.

### Updates made after the editorial deadline

Due to updates after the editorial deadline, differences may exist between the printed Owner's Manual and the Integrated Owner's Manual in the vehicle.

Notes on updates can be found in the appendix of the printed Owner's Manual for the vehicle.

### Owner's Manual for Navigation, Entertainment, Communication

The Owner's Manual for Navigation, Entertainment, and Communication is available as a printed book from an authorized service center.

The topics are also discussed in the Integrated Owner's Manual in the vehicle.

## Media at a glance

---

### General information

The contents of the Owner's Manual are available in various media formats. The following Owner's Manual media formats are available:

- Printed Owner's Manual.
- Integrated Owner's Manual in the vehicle.

### Printed Owner's Manual



The printed Owner's Manual describes all standard, country-specific, and optional equipment offered with the series.

### Integrated Owner's Manual in the vehicle

#### Principle

The Integrated Owner's Manual specifically describes features and functions found in the vehicle. The Integrated Owner's Manual can be displayed on the control display.

#### Selecting the Owner's Manual

1.  Press the button.
2.  "My MINI"
3. "Owner's Manual"
4. Select the desired method of accessing the contents.

#### Scrolling through the Owner's Manual

Turn the Controller, until the next or previous contents are displayed.


#### Context help

##### General information

The section of the Owner's Manual relating to the function that is currently selected can be displayed directly.

## Opening via Central Information Display (CID)

Change directly to the Options menu from the function on the control display:

-  Press the button.
- "Owner's Manual"




## Opening when a Check Control message is displayed

Directly from the Check Control message on the control display:

-  "Owner's Manual"

## Changing between a function and the Owner's Manual

To switch from a function, for instance radio, to the Owner's Manual on the control display and to alternate between the two displays:

-  Press the button.
- "Owner's Manual"
- Select the desired page in the Owner's Manual.
-  Press the button again to return to the last displayed function.
-  Press the button to return to the page of the Owner's Manual displayed last.

To alternate continuously between the last displayed function and the last displayed page of the Owner's Manual, repeat steps 4 & 5. Opens a new display every time.

## Additional sources of information

### Service center

An authorized service center will be glad to answer questions at any time.

### Internet

Vehicle information and general information on MINI, e.g., on technology, are available on the Internet: [www.miniusa.com](http://www.miniusa.com).

### MINI Motorer's Guide app



The app specifically describes features and functions found in the vehicle. The app can be displayed on smartphones and tablets.

### MINI Motorer's Guide Web

Driver's Guide Web shows the most suitable information for the selected vehicle. If possible, only equipment and functions that are actually installed in the vehicle will be explained. Driver's Guide Web can be displayed in any current browser.

## Icons and displays

### Icons in the Owner's Manual

Icon	Meaning
	Precautions that must be followed in order to avoid the possibility of injury to yourself and to others as well as serious damage to the vehicle.
	Measures that can be taken to help protect the environment.
"..."	Control Display texts used to select individual functions.

Icon	Meaning
>...<	Verbal instructions to use with the voice activation system.
>>...<<	Responses generated by the voice activation system.

## Action steps

Action steps to be carried out are presented as a numbered list. These steps must be carried out in the order shown.


1. First action step.
2. Second action step.


## Bulletpoint lists

Items or actions without strict order or alternative options are shown as a bulletpoint list.

- First possibility.
- Second possibility.

## Icons on vehicle parts

 This symbol on a vehicle component indicates that further information on the component is available in the Owner's Manual.

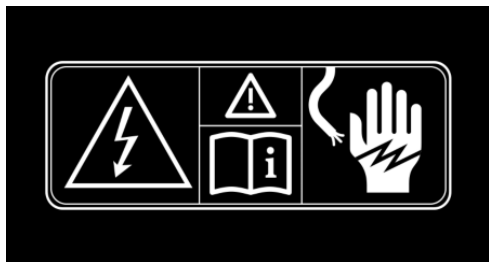

These icons found on parts of the vehicle indicate that incorrect use of high-voltage technology or of orange-colored high-voltage components poses a risk of life-threatening injury by electric shock.

## Vehicle features and options

This Owner's Manual describes all models and all standard, country-specific and optional equipment that is offered in the model series. Therefore, this Owner's Manual also describes and illustrates features and functions that are not available in a vehicle, for example because of the selected optional equipment or the country-specific version.

This also applies to safety-related functions and systems.

When using these functions and systems, the applicable laws and regulations must be observed.

For any options and equipment not described in this Owner's Manual, refer to the Supplementary Owner's Manuals.

An authorized service center is happy to answer any questions that you may have about the features and options applicable to the vehicle.

## Status of the Owner's Manual

### Basic information

The manufacturer of the vehicle pursues a policy of constant development to ensure that our vehicles continue to embody the highest quality and safety standards. In rare cases, therefore, the features described in this Owner's Manual may deviate from those in the vehicle.

### Updates made after the editorial deadline

Due to updates after the editorial deadline, differences may exist between the printed Owner's Manual and the Integrated Owner's Manual in the vehicle.



Notes on updates can be found in the appendix of the printed Owner's Manual for the vehicle.

## For Your Own Safety

### Intended use

Heed the following when using the vehicle:

- Owner's Manual.
- Information on the vehicle. Do not remove stickers.
- Technical vehicle data.
- The traffic, speed, and safety laws where the vehicle is driven.
- Vehicle documents and statutory documents.

### Warranty

The vehicle is technically configured for the operating conditions and registration requirements applicable in the country of first delivery, also known as homologation. If the vehicle is to be operated in a different country it might be necessary to adapt the vehicle to potentially differing operating conditions and registration requirements. Noncompliance with homologation requirements in a certain country may affect warranty coverage. Please consult the New Vehicle Limited Warranty Booklet for further information on warranty matters.

### Maintenance and repairs

Advanced technology, for instance the use of modern materials and high-performance electronics, requires suitable maintenance and repair work.

The vehicle manufacturer therefore recommends having necessary work performed by an authorized service center, e.g., a MINI dealer or service center. If a different repair shop is selected, MINI recommends

selecting a workshop that performs the appropriate work such as maintenance and repair according to MINI specifications with properly trained personnel. In the Owner's Manual, such works are referred to as "another qualified authorized service center or repair shop".

If work is not carried out properly, for instance maintenance and repair, there is a risk of subsequent damages and related safety risks.

Improperly performed work on the vehicle paintwork can lead to a failure or fault of components, e.g., the radar sensors, and thereby result in a safety hazard.

### Parts and accessories

The manufacturer of the vehicle recommends the use of parts and accessory products approved by the manufacturer of the MINI.

Approved parts and accessories, and advice on their use and installation are available from an authorized service center.

MINI parts and accessories were tested by the manufacturer of the MINI for their safety and suitability in MINI vehicles.

The manufacturer of the vehicle warrants genuine MINI parts and accessories.

The manufacturer of the vehicle does not evaluate whether each individual product from another manufacturer can be used with MINI vehicles without presenting a safety hazard, even if a country-specific official approval was issued. The manufacturer of the vehicle does not evaluate whether these products are suitable for MINI vehicles under all usage conditions.

### California Proposition 65 Warning

For vehicles sold in California, the law requires vehicle manufacturers to provide the following warning:

**⚠ Warning**

Engine exhaust and a wide variety of Automobile components and parts, including components found in the interior furnishings in a vehicle, contain or emit chemicals known to the State of California to cause cancer and birth defects and reproductive harm. In addition, certain fluids contained in vehicles and certain products of component wear contain or emit chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Battery posts, terminals and related accessories contain lead and lead compounds. Batteries also contain other chemicals known to the State of California to cause cancer. Wash your hands after handling. Used engine oil contains chemicals that have caused cancer in laboratory animals. Always protect your skin by washing thoroughly with soap and water. For more information go to [www.P65Warnings.ca.gov/passenger-vehicle](http://www.P65Warnings.ca.gov/passenger-vehicle).

**⚠ Warning**

Operating, servicing and maintaining a passenger vehicle or off-highway motor vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service the vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing the vehicle. For more information go to [www.P65Warnings.ca.gov/passenger-vehicle](http://www.P65Warnings.ca.gov/passenger-vehicle).

**Service and warranty**

We recommend that you read this publication thoroughly. The vehicle is covered by the following warranties:

- New Vehicle Limited Warranty.
- Rust Perforation Limited Warranty.
- Federal Emissions System Defect Warranty.
- Federal Emissions Performance Warranty.
- California Emission Control System Limited Warranty.

Detailed information about these warranties is listed in the New Vehicle Limited Warranty Booklet.

The vehicle has been specifically adapted and designed to meet the particular operating conditions and homologation requirements in your country and continental region in order to deliver the full driving pleasure while the vehicle is operated under those conditions. If you wish to operate the vehicle in another country or region, you may be required to adapt the vehicle to meet different prevailing operating conditions and homologation requirements. You should also be aware of any applicable warranty limitations or exclusions for such country or region. In such case, please contact Customer Relations for further information.

**Maintenance**

Maintain the vehicle regularly to sustain the road safety, operational reliability and the New Vehicle Limited Warranty.

Specifications for maintenance measures:

- MINI maintenance system

Maintenance, refer to page 261.

- Maintenance Booklet, available online and accessible via a QR code in the New Vehicle Limited Warranty Booklet.
- Warranty and Service Guide Booklet for Canadian models.

If the vehicle is not maintained or is improperly maintained, this could result in serious damage to the vehicle.

A failure to maintain the vehicle or improper maintenance may affect your warranty coverage. Please consult the New Vehicle Limited Warranty Booklet for further information on warranty matters.

Refer to section on engine oil change regarding recommended service intervals for oil changes.

## Data memory

### General information

Electronic control devices are installed in the vehicle. Electronic control units process data they receive from vehicle sensors, self-generate or exchange with each other. Some control units are necessary for the vehicle to function safely or provide assistance during driving, for instance driver assistance systems. Furthermore, control units facilitate comfort or infotainment functions.

Information about stored or exchanged data can be requested from the manufacturer of the vehicle, in a separate booklet, for example.

### Personal reference

Each vehicle is marked with a unique vehicle identification number. Depending on the country, the vehicle owner can be identified with the vehicle identification number, license plate and corresponding authorities. In addition, there are other options to track

data collected in the vehicle to the driver or vehicle owner, for instance via utilized services.

### Operating data in the vehicle

Control units process data to operate the vehicle.

For example, this includes:

- Status messages for the vehicle and its individual components, e.g., wheel RPM, wheel speed, deceleration, lateral acceleration, engaged seat belt indicator.
- Ambient conditions, e.g., temperature, rain sensor signals.

The processed data is only processed in the vehicle itself while the vehicle is being operated. Data is not stored beyond the operating time.

Electronic components, e.g. control units and vehicle keys, contain components for storing technical information. Information about the vehicle condition, component usage, maintenance recommendations, events or faults can be stored temporarily or permanently.

This information generally documents the state of a component, a module, a system, or the surrounding area, for instance:

- Operating states of system components, such as fill levels, tire pressure, battery status.
- Malfunctions and faults in important system components, for instance lights and brakes.
- Responses by the vehicle to special driving situations such as airbag deployment or engagement of the driving stability control systems.
- Information on vehicle-damaging events.

The data is required to perform the control unit functions. Furthermore, it also serves

to detect and correct malfunctions, and helps the vehicle manufacturer to optimize vehicle functions.

The majority of this data is stored temporarily and is only processed within the vehicle itself. In some circumstances the vehicle may store some data for an additional but limited period of time.

When servicing, for instance during repairs, service processes, warranty cases, and quality assurance measures, this technical information can be read out from the vehicle together with the vehicle identification number.

An authorized service center or another qualified service center or repair shop can read out the information. The diagnostic socket required by law in the vehicle is used to read out data.

The data is collected, processed, and used by the relevant organizations in the service network. The data documents technical conditions of the vehicle, which can be used to determine vehicle maintenance status, and facilitate quality improvement.

Vehicle fault and event memories can be reset by an authorized service center or another qualified service center or repair shop when performing repair or servicing work.

## Data entry and data transfer into the vehicle

### General information

Depending on the vehicle equipment, comfort and individual settings can be stored in the vehicle and modified or reset at any time.

For example, this includes:

- Settings for the seat and steering wheel positions.
- Chassis and climate control settings.

If necessary, data can be transferred to the entertainment and communication system of the vehicle, for instance via smartphone.

This includes the following depending on the respective equipment:

- Multimedia data such as music, films or photos for playback in an integrated multimedia system.
- Address book data for use in conjunction with an integrated hands-free system or an integrated navigation system.
- Entered navigation destinations.
- Data on the use of Internet services.

This data can be stored locally in the vehicle or is found on a device that has been connected to the vehicle, e.g., a smartphone, USB stick or MP3 player. If this data is stored in the vehicle, it can be deleted at any time.

This data is only transmitted to third parties upon personal request as part of the use of online services. The transmission depends on the selected settings for the use of the services.

### Incorporation of mobile devices

Depending on the vehicle equipment, mobile devices connected to the vehicle, for instance smartphones, can be controlled via the vehicle control elements.

The sound and picture from the mobile devices can be played back and displayed through the multimedia system. Certain information is transferred to the mobile devices at the same time. Depending on the type of incorporation, this includes, for instance, position data and other general vehicle information. This optimizes the way in which selected apps, for instance navigation or music playback, work.

There is no further interaction between the mobile device and the vehicle, such as active access to vehicle data.

How the data will be processed further is determined by the provider of the particular app being used. The extent of the possible settings depends on the respective app and the operating system of the mobile device.

## Services

### General information

If the vehicle has a wireless network connection, it will enable data to be exchanged between the vehicle and other systems. The wireless network connection is realized via an in-vehicle transmitter and receiver unit or via personal mobile devices brought into the vehicle, for instance smartphones. This wireless network connection enables 'online functions' to be used. These include online services and apps supplied by the vehicle manufacturer or by other providers.

### Services from the vehicle manufacturer

Where online services from the vehicle manufacturer are concerned, the corresponding functions are described in the appropriate place, for instance the Owner's Manual or manufacturer's web page. The relevant legal information pertaining to data protection may also be found on the manufacturer's website. Personal data may be used to perform online services. Data is exchanged over a secure connection, for instance with the IT systems of the vehicle manufacturer intended for this purpose.

Any collection, processing, and use of personal data above and beyond that needed to provide the services must always be based on a legal permission, contractual arrangement or consent. It is also possible to activate or deactivate the data connection as a whole. This excludes functions and services required by law such as Assist systems.

### Services from other providers

When using online services from other providers, these services are the responsibility of the relevant provider and subject to their data privacy conditions and terms of use. The vehicle manufacturer has no influence on the content exchanged during this process. Information on the way in which personal data is collected and used in relation to services from third parties, the scope of such data, and its purpose, can be obtained from the relevant service provider.

## Event Data Recorder (EDR)

This vehicle is equipped with an event data recorder (EDR). The main purpose of an EDR is to record, in certain crash or near crash-like situations, such as an air bag deployment or hitting a road obstacle, data that will assist in understanding how a vehicle's systems performed. The EDR is designed to record data related to vehicle dynamics and safety systems for a short period of time, typically 30 seconds or less. The EDR in this vehicle is designed to record such data as:

- How various systems in the vehicle were operating.
- Whether or not the driver and passenger seat belts were fastened.
- How far, if at all, the driver was depressing the accelerator and/or brake pedal.
- How fast the vehicle was traveling.

This data can help provide a better understanding of the circumstances in which crashes and injuries occur.

EDR data is recorded by the vehicle only if a nontrivial crash situation occurs; no data is recorded by the EDR under normal driving conditions and no personal data, for

instance name, gender, age, and crash location, are recorded.

However, other parties, such as law enforcement, could combine the EDR data with the type of personally identifying data routinely acquired during a crash investigation.


To read data recorded by an EDR, special equipment is required, and access to the vehicle or the EDR is needed. In addition to the vehicle manufacturer, other parties, such as law enforcement, that have the special equipment, can read the information if they have access to the vehicle or the EDR.

## Vehicle identification number

### General information

Depending on the national-market equipment, the vehicle identification number is located in different positions in the vehicle. This chapter describes all possible positions for the series.

### Engine compartment

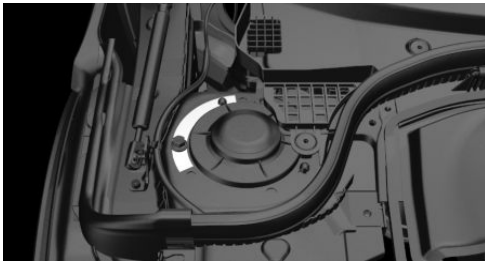

The engraved vehicle identification number can be found in the engine compartment, on the right-hand side of the vehicle.

### Right nameplate

For 3-door models:



The vehicle identification number can be found on the nameplate, on the right-hand side of the vehicle.


For 5-door models:



The vehicle identification number can be found on the nameplate, on the right-hand side of the vehicle.

### Left nameplate

For 3-door models:

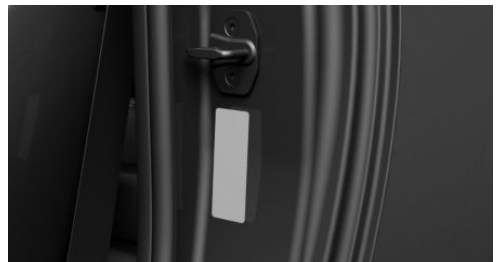

The vehicle identification number can be found on the nameplate, on the left-hand side of the vehicle.

For 5-door models:



The vehicle identification number can be found on the nameplate, on the left-hand side of the vehicle.

## Windshield



The vehicle identification number can also be found behind the windshield.

## Reporting safety defects

### For US customers

The following only applies to vehicles owned and operated in the US.

If you believe that the vehicle has a defect which could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration NHTSA, in addition to notifying MINI of North America, LLC, P.O. Box 1227, Westwood, New Jersey 07675-1227, Telephone 1-800-831-1117.

If NHTSA receives similar complaints, it may open an investigation, and if it finds

that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign.

However, NHTSA cannot become involved in individual problems between you, your dealer, or MINI of North America, LLC.

To contact NHTSA, you may call the Vehicle Safety Hotline toll-free at 1-888-327-4236 (TTY: 1-800-424-9153); go to <http://www.safercar.gov>; or write to: Administrator, NHTSA, 1200 New Jersey Avenue, SE., Washington, DC 20590. You can also obtain other information about motor vehicle safety from <http://www.safercar.gov>


### For Canadian customers

Canadian customers who wish to report a safety-related defect to Transport Canada, Defect Investigations and Recalls, may call the toll-free hotline 1-800-333-0510. You can also obtain other information about motor vehicle safety from <http://www.tc.gc.ca/roadsafety>.

# Getting in

## Opening and closing

### Buttons on the vehicle key

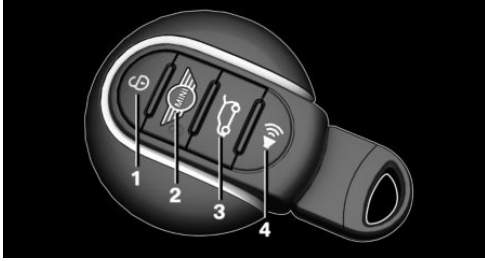

- 1 Unlocking
- 2 Locking
- 3 Unlocking the tailgate
- 4 Panic mode

### Unlocking the vehicle

 Press the button on the vehicle key.

Depending on the settings, either only the driver's door or all vehicle access points are unlocked.

If only the driver's door is unlocked, press the button on the vehicle key again to unlock the other vehicle access points.

 Press and hold the button on the vehicle key after unlocking.

The windows and the glass sunroof are opened, as long as the button on the vehicle key is pressed.

### Locking the vehicle

 Press the button on the vehicle key.

All vehicle access points are locked.


## Buttons for the central locking system

### Overview




Buttons for the central locking system.

### Locking

 Pressing the button locks the vehicle if the front doors are closed.

### Unlocking

 Pressing the button unlocks the vehicle.

### Panic mode

You can trigger the alarm system if you find yourself in a dangerous situation.

 Press the button on the vehicle key and hold for at least 3 seconds.

To switch off the alarm: press any button.

### Comfort Access

#### Principle


The vehicle can be accessed without operating the vehicle key.

Carrying the vehicle key with you, e.g., in your pants pocket, is sufficient.




The vehicle automatically detects the vehicle key when it is in close proximity or in the interior.

### Unlocking the vehicle

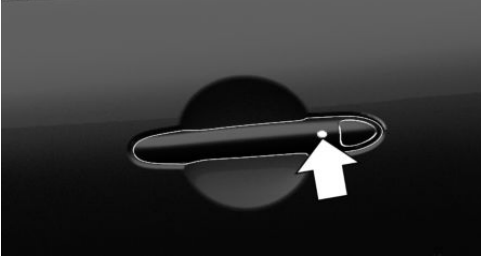

Press the button on the door handle of the driver's or front passenger door.

### Locking the vehicle

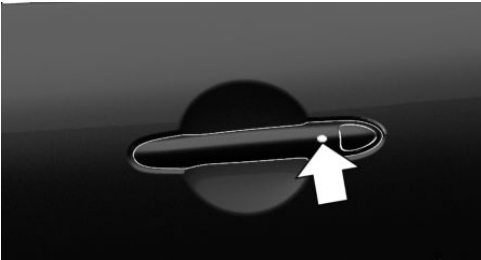


Press the button on the door handle of the driver's or front passenger door.

### Tailgate

#### Unlocking



- Unlock the vehicle and then press the button on the outer side of the tailgate.
-  Press and hold the button on the vehicle key for approx. 1 second.

Depending on the setting, the doors may also be unlocked.

### Closing

Closing the tailgate manually.

## Displays and control elements

### In the vicinity of the steering wheel




- 1 Low beams, fog lights
- 2 High beams, headlight flasher, turn signal
- 3 Instrument cluster
- 4 Window wiper system

### Indicator/warning lights

The indicator/warning lights can illuminate in a variety of combinations and colors.


Several of the lights are checked for proper functioning and illuminate temporarily when drive-ready state is established.

## Driver's door

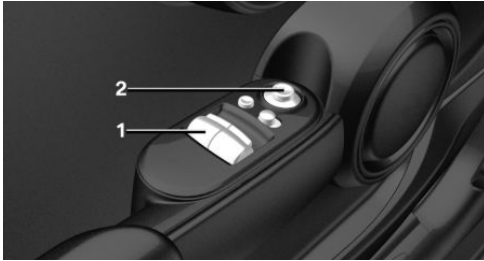

- 1 Power windows
- 2 Exterior mirrors

## All around the selector lever

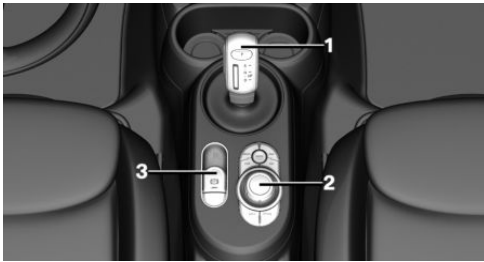









- 1 Selector lever
- 2 Controller with buttons
- 3 Parking brake

## Central Information Display (CID)

### Principle

The Central Information Display (CID) combines the functions of a multitude of switches. These functions can be operated via the Controller.

## Buttons on the Controller

Button	Function
	Press once: calls up the main menu. Press twice: displays all menu items of the main menu.
	Call up the Communication menu.
	Call up the Media/Radio menu.
	Call up the destination input menu for navigation.
	Call up the CarPlay menu.
	Call up the navigation map.
	Press once: opens the previous display. Press and hold: open the menus used last.
	Call up the Options menu.

## Voice control


### Activating the voice control system



Press the button on the steering wheel.

Wait for the signal tone.

Say the command.

 This icon indicates that the voice activation system is active.

If no other commands are available, operate the function via the Central Information Display (CID).

## Ending the voice control system




Press the button on the steering wheel or >Cancel.

# Set-up and use

## Seats, mirrors and steering wheel


### Manually adjustable seats

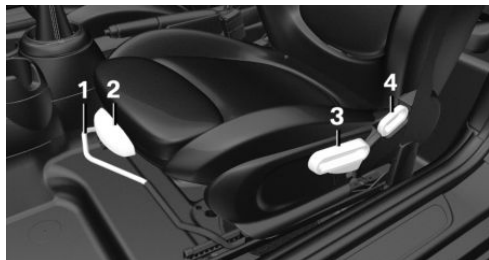

- 1 Longitudinal direction
- 2 Thigh support
- 3 Height
- 4 Backrest tilt


### Adjusting the head restraint

#### Height

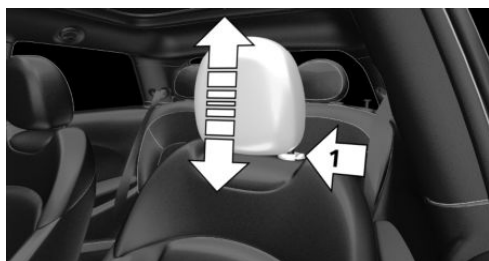

- To raise: push the head restraint up.
- To lower: press the button, arrow 1, and push the head restraint down.

### Adjusting the exterior mirrors

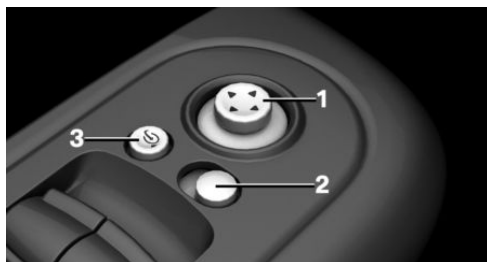

- 1 Adjusting
- 2 Selecting a mirror, Automatic Curb Monitor
- 3 Folding in and out

### Adjusting the steering wheel

#### In four directions



1. Fold the lever down.
2. Move the steering wheel to the preferred height and angle to suit your seat position.
3. Fold the lever back up.

## Entering the rear

1. Pull lever up to the stop.



2. Fold backrest forward.
3. Push the seat forward.

### Original position




1. Push the seat back into the initial position.
2. Fold back the backrest to lock the seat.



## Infotainment

### Radio

#### Buttons and functions

Depending on the country and equipment version, the radio has the following buttons.



Button	Function
	Press: turns sound output on/off. Turn: adjusts the volume.
	Change the entertainment source.
	Press once: changes the station/track. Press and hold: fast forward/rewind the track.

Button	Function
	Programmable memory buttons.
	Changeover of wave range/satellite radio.

## Navigation destination input

### Entering a destination via address

#### State/province

1.  "Navigation"
2.  "Enter address"
3. "State/Province?"
4. Select the country from the list.

#### Entering the address

The address can be entered in any order.

Example: entering the address via the town/city

1. "City/Postal code?"
2. Enter the town/city.  
The list is narrowed down further with each entry.
3. **OK** Select the icon.
4. Select a town/city from the list.
5. If necessary, enter the street.
6. Select the street as you would the town/city.
7. If necessary, enter a house number.
8. **OK** Select the icon.
9. Select a house number or range of house numbers from the list.


#### Starting destination guidance

"Start guidance"

Destination guidance is started to the town/city center if no street is entered.

## Pairing the mobile phone

After the mobile phone is paired once with the vehicle, the mobile phone can be operated using the Central Information Display (CID), the steering wheel buttons and spoken instructions.

1.  "My MINI"
2. "System settings"
3. "Mobile devices"
4. "Connect new device"

The vehicle's Bluetooth name is displayed on the control display.

5. Select the functions for which the mobile phone is to be used.
6. To perform additional functions with your mobile phone, e.g., to search for/connect a Bluetooth device or new device, please refer to your mobile phone's operating instructions.

The vehicle's Bluetooth name is shown on your mobile phone's display. Select the vehicle's Bluetooth name.

7. Depending on the mobile device, a control number is displayed or the control number must be entered.
  - Compare the control number displayed on the control display with the control number displayed on the mobile device. Confirm the control number on the device and on the control display.
  - Enter and confirm the same control number on the device and via the Central Information Display (CID).

The device is connected and displayed in the device list.

## Using the telephone

### Accepting a call

Incoming call can be accepted via the Central Information Display (CID) or the button on the steering wheel.

#### Via the Central Information Display (CID)

 "Accept"

#### Via the button on the steering wheel





Press the button.

#### Via the instrument cluster

Use the OK button on the steering wheel to select: "Accept"

### Dialing a number

1.  "Communication"
2. "Dial number"
3. Select the numbers individually.
4.  Select the icon.

Establish the connection via the additional telephone:

1.  Press the button.
2. "Call via"

## Apple CarPlay preparation

### Principle

CarPlay allows select functions of a compatible Apple iPhone to be used via Siri voice control and the on-board monitor.


### Functional requirements

- Compatible iPhone: iPhone 5 or later with iOS 7.1 or later.
- Corresponding mobile contract.
- Bluetooth, Wi-Fi, and Siri voice control are activated on the iPhone.

- If necessary, the setting for mobile data must be activated on the iPhone.
- Wi-Fi and Bluetooth are enabled in the vehicle.

### Turning on Bluetooth and CarPlay

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Mobile devices"
4. "Settings"
5. Select the following settings:
  - "Bluetooth®"
  - "Apple CarPlay"

### Pairing the iPhone with CarPlay

Pair iPhone via Bluetooth with the vehicle.

Select CarPlay as the function:

1.  "Apple CarPlay"

The iPhone is connected to the vehicle and displayed in the device list.

# On the road

## Driving

### Drive-ready state

#### General information

Activated drive-ready state is the equivalent of a running engine in conventional vehicles.

#### Start/Stop button



Pressing the Start/Stop button switches standby state on or off.

Drive-ready state is switched on when you depress the brake pedal while pressing the Start/Stop button.

#### Turning on the drive-ready state

1. Close the driver's door.
2. Depress the brake pedal.
3. Press the Start/Stop button.

Drive-ready state is switched on.

#### Display in the instrument cluster



The READY display indicates that the vehicle is ready for driving.

### Drive-ready state in detail

#### Prerequisites

Driving is possible when the following prerequisites are met:

- The state of high-voltage battery charge is sufficient.
- The driver's door is closed.
- Charging cable is detached.

#### Driving

1. Turn on drive-ready state.
2. Apply the brake and engage the selector lever in position D or R.
3. Release the parking brake.
4. Depress the accelerator pedal to drive.

#### Engaging selector lever positions

- Interlock: the selector lever position P can be exited only when the drive-ready state is activated.
- Gearshift lever lock: with the vehicle stationary, press on the brake pedal before shifting out of P or N; otherwise, the gearshift request will not be executed.
- Gearshift lever lock: before shifting out of P, detach the charging cable from the vehicle; otherwise, the gearshift request will not be executed.

#### Engaging selector lever position N, D, R



Move the selector lever in the desired direction.



### Engaging selector lever position P



Apply brake and press button P.


### Parking brake

#### Set the electrical parking brake

 Pull the switch when the vehicle is stationary.

The LED and indicator illuminate.

#### Releasing


 Press the switch while stepping on the brake pedal or selector lever position P is set.

The LED and indicator light turn off.

The parking brake is released.

### Turn signal, high beams, headlight flasher, roadside parking lights

#### Turn signal

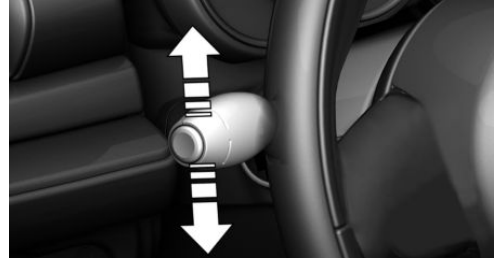

- Flashing: press the lever past the resistance point.
- Triple turn signal activation: lightly tap the lever up or down.
- Brief flashing: press the lever to the resistance point and hold it there for as long as you want the turn signal to flashing.


#### High beams, headlight flasher



Press the lever forward or pull it backward.

- High beams on, arrow 1.  
The high beams illuminate when the low beams are switched on.
- High beams off/headlight flasher, arrow 2.

## Canada: roadside parking light

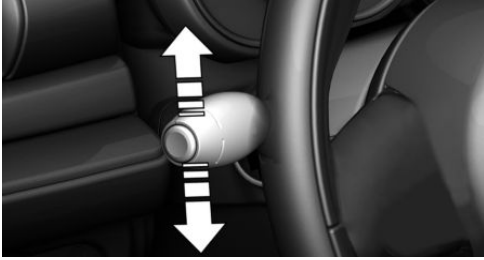







To illuminate the vehicle on one side.

- On: with the standby state switched off, press the lever either up or down past the resistance point for approx. 2 seconds.
- Off: briefly press the lever to the resistance point in the opposite direction.

## Lights and lighting

### Lighting functions

Icon	Function
	Bad weather light.
	Automatic headlight control. Cornering light.
	Lights off. Daytime driving lights.
	Parking lights.
	Low beams.
	Instrument lighting.

## Window wiper system

### Turning the wipers on/off and flick wipe

#### Turning on



Press the lever up until the desired position is reached.

- Resting position of the wipers: position 0.
- Rain sensor: position 1.
- Normal wiper speed: position 2.
- Fast wiper speed: position 3.

#### Turning off and flick wipe



Press the lever down.

- Switching off: press the lever down until it reaches its basic setting.
- Flick wipe: press the lever down from the basic setting.

## Rain sensor

### Activate/deactivate



To activate: press the lever up once from its basic setting, arrow 1.

To deactivate: press the lever back into the basic setting.

### Set interval period or sensitivity of the rain sensor



Turn the thumbwheel on the wiper lever.

### Cleaning the windshield



Pull the lever.

## Canada: window wiper system

### Turning the wipers on/off and flick wipe

#### Turning on



Tap up the lever or press it past the resistance point.

- Normal wiper speed: tap up once.
- Fast wiper speed: tap up twice or tap once beyond the resistance point.

#### Turning off and flick wipe



Press the lever down.

- To turn off fast wipe: press down twice.
- To turn off normal wipe: press down once.
- Flick wipe: press down once.

## Rain sensor

### Activate/deactivate



Press the button on the wiper lever.

### Set interval period or sensitivity of the rain sensor



Turn the thumbwheel on the wiper lever.










### Cleaning the windshield



Pull the lever.

## Climate control

### Automatic climate control

Button	Function
	Temperature.
	Air conditioning.
	Maximum cooling.
	AUTO program.
	Air recirculation mode.
	Adjusts the air flow, manual.
	Air distribution, manual.
	Defrosts and defogs the windows.
	Rear window defroster.

## Charging the vehicle

### Charging the vehicle

#### Charging socket cover



The charging socket cover is located on the right side of the vehicle.

Always keep charging socket clean and unobstructed.

Keep the charging socket cover closed when the charging socket is not used.


#### Connecting the charging cable

To connect, engage selector lever position P, deactivate the drive-ready state and unlock the vehicle. Set the parking brake, if needed.

Before connecting, clean the area between the charging socket cover and charging

socket and the charging cable plug as necessary, for instance remove snow.

1. Tap on the charging socket cover, arrow. The charging socket cover opens.

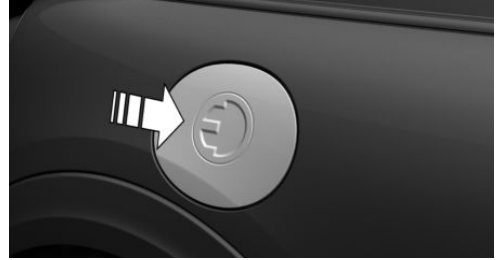

2. Remove the charging socket lid, arrow.



3. Remove the cover of the charging cable connector, if needed.
4. Connect the Mode 2 charging cable to the domestic socket outlet or the Mode 3 charging cable to the port at the AC charging station as needed.
5. Insert the appropriate charging cable connector, and push it in until it engages.
6. Hold the charging cable until it is correctly locked.

When charging at a charging station, follow the instructions at the charging station.

#### Removing

AC charging: when the charging process is active and the vehicle is locked, the charging cable is locked. Unlock the vehicle before removing the cable.

Direct current charging: during the charging process, the charging cable is locked. When the charging process is completed, the charging cable is automatically unlocked.

If necessary, clean the area between the charging socket cover and charging socket, for instance from snow, before removing it.

1. Unlock the vehicle with the vehicle key if it is locked.

Charging cable is unlocked.

2. Press the release button on the handle, arrow 1, and grasp the charging cable at the gripping areas.

Charging process is interrupted.



3. Detach the charging cable from the charging socket, arrow 2.
4. Put the charging socket lid back on.
5. Press on the charging socket cover until it engages.
6. Attach cover of the charging cable connector, if needed.
7. Detach the Mode 2 charging cable from the domestic socket outlet or the Mode 3 charging cable from the port at the AC charging station as needed.
8. Stow the charging cable.

At a charging station, insert the permanently installed charging cable in the place provided for it.

## Wheels and tires

### Tire pressure specifications



The tire inflation pressure values can be found on the sign on the door pillar.

### Checking the tire pressure

Regularly check the tire inflation pressure and correct it as needed:

- At least twice a month.
- Before embarking on an extended trip.

### After correcting the tire pressure

Reinitialize the Flat Tire Monitor.

Monitor the tire pressure.

## Providing assistance

### Hazard warning flashers




The button is located above the control display.

## Breakdown Assistance

### MINI Roadside Assistance

This service can be reached around the clock in many countries.

1.  "MINI Connected"
2. "MINI Assist"
3. "MINI Roadside Assistance"

The contact to the MINI Roadside Assistance is established.

A telephone number is displayed, if needed. Select to dial the telephone number on a connected mobile phone.


# Dashboard

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily avail-

able in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## In the vicinity of the steering wheel

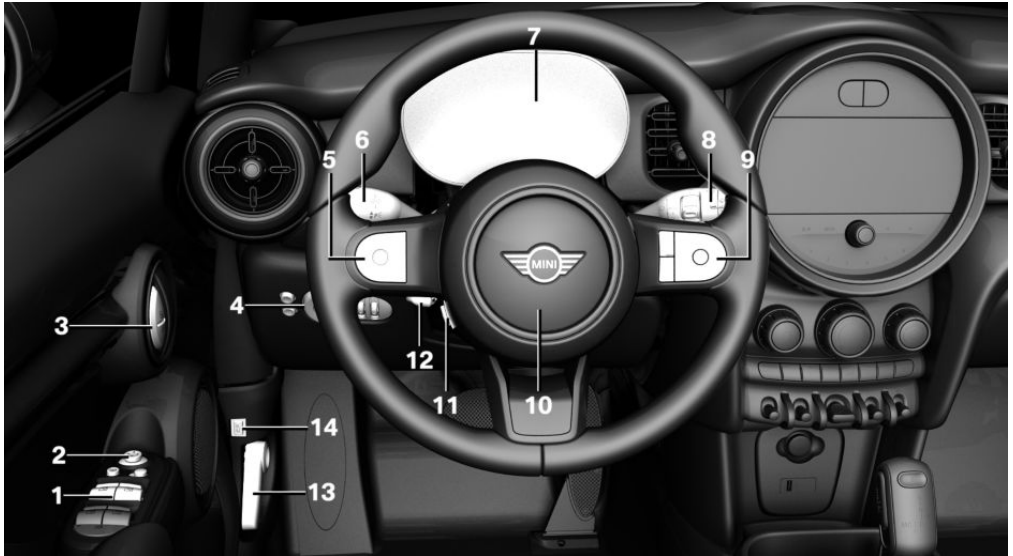

- 1 Power windows [79](#)
- 2 Exterior mirror adjustment button [90](#)
- 3 Buttons of the central locking system [69](#)
- 4 Lights



Bad weather light [138](#)



Light switch [135](#)



Lights off  
Daytime driving lights [137](#)























Parking lights [135](#)



Low beams [135](#)



- |   |   |   |                                       |
|---|---|---|---------------------------------------|
|    | Automatic headlight control<br>136                |    | Roadside parking lights 136           |
|   | Cornering light 137                               |    | On-board computer 128                 |
|   | Automatic High Beam Assistant<br>137              |   |                                       |
|    | Instrument lighting 139                           |   |                                       |
| 5   | Steering wheel buttons, left                      | 7   | Instrument cluster 117                |
|   | Camera-based cruise control<br>on/off 171         | 8   | Pitman arm, right                     |
|    |   |    | Wipers 109                            |
|    | Cruise Control on/off 177                         |   | Wiper on Canadian models<br>112       |
|    | Speed Limiter 162                                 |    | Rain sensor 110                       |
|    | Interrupting, continuing<br>cruise control        |    | Rain sensor on Canadian models<br>113 |
|    | Cruise control: increase speed                    |    | Cleaning windows 110                  |
|    | Cruise control: reduce speed                      |    | Rear wiper in Canadian models<br>111  |
|    | Camera-based cruise control:<br>reduce distance   |    | Rear wiper 111                        |
|   | Camera-based cruise control:<br>increase distance |    | Clean the rear window 111             |
| 6   | Pitman arm, left                                  | 9   | Steering wheel buttons, right         |
|   | Turn signal 108                                   |   | Voice control 44                      |
|  |   |   | Telephone                             |
|  | High beams, headlight flasher<br>108              |  | Confirm the selection 128             |
|  | Automatic High Beam Assistant<br>137              |  | Move selection up 128                 |
|   |   |  | Move selection down 128               |



Increase volume



Reduce volume



10 Horn, entire surface


11 Steering wheel heating 92

12 Adjusting the steering wheel 92

13 Unlocking the hood 257

14 Depending on the equipment: using tail-gate 72

## In the vicinity of the center console

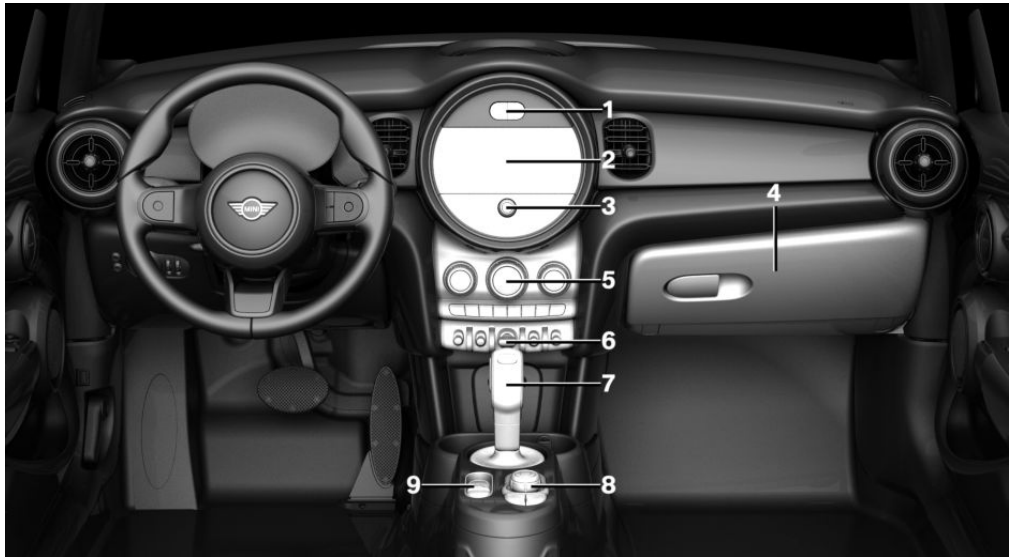

1 Hazard warning system 269



Intelligent Safety 153

2 Control display 36

3 Radio/Multimedia

4 Glove compartment 209

5 Climate control 191



6 PDC Park Distance Control 180

Rearview camera 183

Automatic Parking Assistant 186



Energy recovery 103



Turn drive-ready state on and off 99



Dynamic Stability Control  
167

7 Selector lever 101

8 Controller with buttons 39









MINI Driving Modes switch  
168

9 Parking brake, electric 106

## In the vicinity of the headliner



- |   |   |   |   |   |                            |
|---|---|---|---|---|----------------------------|
| 1 |  | Emergency Call, SOS 270                     | 4 |  | Ambient light 139          |
| 2 |  | Indicator light, front passenger airbag 144 | 5 |  | Panoramic glass sunroof 81 |
| 3 |  | Reading lights 139                          | 6 |  | Interior lights 139        |

# Central Information Display (CID)

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Principle

The Central Information Display (CID) combines the functions of a multitude of switches. These functions can be operated via the Controller.

## Safety information

### Warning


Operating the integrated information systems and communication devices while driving can distract from surrounding traffic. It is possible to lose control of the vehicle. There is a risk of accident. Only use the systems or devices when the traffic situation allows. As warranted, stop and use the systems and devices while the vehicle is stationary.

## Input and display

### Main menu

#### General information

The main menu is divided into two areas. The left area contains menu items that can be used to call up all functions from the on-board monitor. The menu items in the right area show dynamic contents that enable quick access to certain functions.

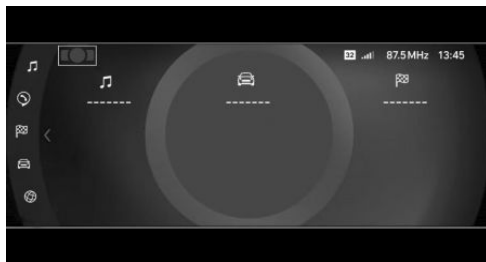

#### Media/Radio

All functions of the entertainment system, for instance radio stations or pairing with external devices.

#### Communication

Telephone and message function, e-mail and calendar and connecting and managing mobile devices, for instance smartphones.

#### Navigation

Access to the navigation system, destination input and traffic bulletins. Configurable map views and other functions, such as points of interest.

## My MINI

Information on vehicle status and setting options for vehicle and on-board monitor. Access to the Integrated Owner's Manual.

## MINI Connected



Access to apps and vehicle functions. Additional apps and vehicle functions can be purchased from the MINI Connected Store.

## Notifications

Access to all incoming messages in the vehicle, for instance Check Control messages.

## Letters and numbers

Depending on the menu, you can switch between entering upper and lower case letters, numbers and characters:

Icon	Function
abc ABC	Change between capital and lower-case letters.
	Insert blank space.
	Use voice control.
OK	Confirm entry.

## Without navigation system

@<sup>A</sup> A<sup>a</sup> a<sup>@</sup> Select the icon.

## Entry comparison

When entering names and addresses, the choice is narrowed down with every letter entered and letters may be added automatically.

Entries are continuously compared with data stored in the vehicle.

- Only those letters are offered during entry for which data is available.
- Destination search: place names can be entered in all languages that are available on the control display.

## Activating/deactivating the functions

Several menu items are preceded by a checkbox. The checkbox indicates whether the function is activated or deactivated. Selecting the menu item activates or deactivates the function.



- Function is activated.
- Function is deactivated.

## Status information








### General information

The status field can be found in the upper area of the control display. Status information is displayed in the form of icons.

### Radio

Icon	Meaning
	HD Radio station is being received.
	Satellite radio is switched on.

### Telephone

Icon	Meaning
	Incoming or outgoing call.
	Missed call.
	Signal strength of mobile phone network. Icon flashes: network search.
	Mobile phone network is not available.
	Roaming is active.
	SMS text message received.
	Message received.

Icon	Meaning
	Reminder.
	Sending not possible.

**Entertainment**

Icon	Meaning
	Bluetooth audio.
	USB audio interface.
	Mobile phone audio interface.
	Apple CarPlay.

**Other icons**

Icon	Meaning
	Check Control message.
	The sound output has been switched off.
	Encrypted connection not active.
	Request for the current vehicle position.
	Checking the current vehicle position.

**Split screen**

**General information**

Additional information can be displayed on the right side of the split screen, for instance information from the on-board computer.

In the divided screen view, the so-called split screen, this information remains visible even when changing to another menu.

**Switching the split screen on/off**

- Press the button.
- "Split screen"

**Selecting the display**

The display can be selected in menus which support the split screen function.

- Tilt the Controller to the right until the split screen is selected.
- Press the Controller.
- Select the desired setting.

**Specifying the number of displays**

It is possible to specify the number of displays.

- Tilt the Controller to the right until the split screen is selected.
- Press the Controller.
- "Personalize menu"
- Select the desired setting.
- Tilt the Controller to the left.

**Control elements**

**Overview**



- Control display
- Controller

## Control display

### General information

To clean the control display, follow the vehicle care instructions, refer to page 279.

In the case of very high temperatures on the control display, for instance due to intense solar radiation, the brightness may be reduced down to complete deactivation. Once the temperature is reduced, for instance through shade or air conditioning system, the normal functions are restored.

### Safety information

#### Warning

Devices connected to the vehicle via a cable, such as mobile phones or loose objects, can be thrown through the vehicle interior while driving, such as in the event of an accident, braking or evasive maneuver. There is a risk of injury. Secure loose objects or devices that are connected to the vehicle via a cable.

#### Warning

Objects in the area in the front of the control display can slip and damage the control display. There is a risk of injury or risk of damage to property. Do not place objects in the area in front of the control display.

### Switching on/off automatically


The control display is switched on automatically when the vehicle is unlocked or as soon as the control display is needed for operation.

In certain situations, the control display is switched off automatically, for instance if

no operation is performed on the vehicle for several minutes.

### Switching on/off manually

The control display can also be switched off manually.

-  Press the button.
- "Turn off control display"

Press the Controller or any button on the Controller to switch it back on again.


## Controller

### General information


The buttons can be used to open the menus directly. The Controller can be used to select menu items and enter the settings.

### Operation


- Turn to switch between menu items, for example.

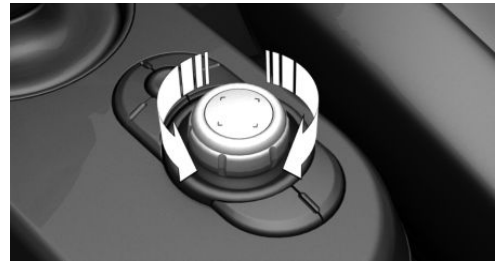

- Press to select a menu item, for example.

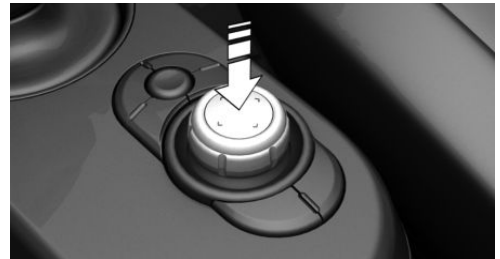

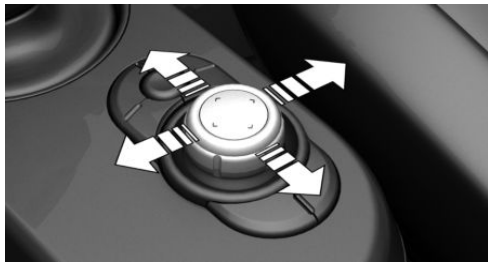




- With navigation system: tilt in four directions to switch between displays, for example.








- Without navigation system: tilt in two directions to switch between displays, for example.




### Buttons on the Controller


Button	Function
	Press once: calls up the main menu. Press twice: displays all menu items of the main menu.
	With navigation system: opens the Communication menu.
	With navigation system: opens the Media/Radio menu.
	Without navigation system: open the Audio menu.
	Without navigation system: opens the Telephone menu.

Button	Function
	With navigation system: opens destination input menu for navigation.
	Call up the CarPlay menu.
	With navigation system: opens navigation map. Without navigation system: call up the CarPlay map.
	Press once: opens the previous display. Press and hold: open the menus used last.
	Call up the Options menu.

## Operating via the Controller

### Opening the main menu

-  Press the button.

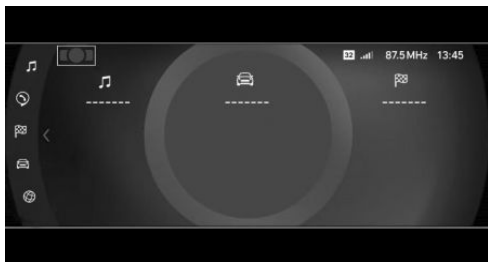

The main menu is displayed.

All Central Information Display (CID) functions can be called up via the main menu.

### Adjusting the main menu

-  Press the button twice.



All menu items of the main menu are displayed.

2. Select a menu item.
3. To move the menu item to the desired position, tilt the Controller to the right or left.

## Selecting menu items

Highlighted menu items can be selected.

1. Turn the Controller until the desired menu item is highlighted.
2. Press the Controller.

## Adjusting menu contents

The display of menus "Media/Radio", "Communication" and "MINI Connected" can be adjusted, for instance to remove the entries of functions that are not used from the menu.

Via the Central Information Display (CID):

1. Select the menu.
2. "Personalize menu"
3. Select desired menu contents to be displayed.

## Dynamic contents

You can display dynamic contents within the menu items. The contents of the menu items update automatically, e.g., the active destination guidance in the navigation.

Via the Central Information Display (CID):


1.  "My MINI"
2. "Contents of main menu"

## Changing between displays

After a menu item is selected, for instance "System settings", a new display appears.

- Tilt the Controller to the left.

The current display closes and the previous display is shown.

-  Press the button.  
The previous display re-opens.
- Tilt the Controller to the right.  
The new display opens.


An arrow indicates that additional displays can be opened.

## Opening recently used menus

The recently used menus can be displayed.

-  The recently used menus are displayed.

## Going to the Options menu

-  Press the button.

The "Options" menu is displayed.

The menu consists of various areas, for instance:




- "Split screen": screen settings.
- "Media/Radio": control options for the selected main menu.
- "Save station": if applicable, further control options for the selected menu.

## Entering letters and numbers

### Input

1. Turn the Controller: select letters or numbers.
2. **OK** : confirm entry.

## Deleting

Icon	Function
	Press the Controller: delete letters or number.
 or 	Hold the Controller down: delete all letters or numbers.

## Using alphabetical lists

For alphabetical lists with more than 30 entries, the letters for which there is an entry are displayed at the left edge.

1. Turn the Controller to the left or right quickly.  
All letters for which there are entries are displayed on the left edge.
2. Select the first letter of the desired entry.  
The first entry of the selected letter is displayed.

## Operation via touchscreen


### General information

Depending on the equipment version, the control display is equipped with a touchscreen.

Touch the touchscreen with your fingers. Do not use any objects.

### Opening the main menu


 Tap on the icon.

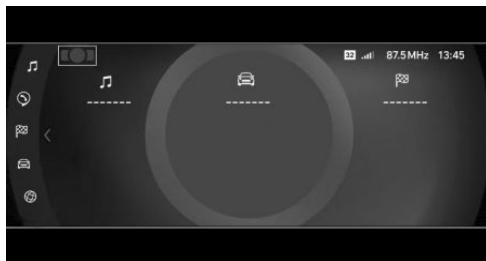

The main menu is displayed.

All Central Information Display (CID) functions can be called up via the main menu.

### Adjusting the main menu

1.  Tap on the icon.
2. Drag the menu item to the desired position on the right or left.

### Selecting menu items

Tap the desired menu item.

### Dynamic contents

You can display dynamic contents within the menu items. The contents of the menu items update automatically, e.g., the active destination guidance in the navigation.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Contents of main menu"

### Changing between displays

After a menu item is selected, a new display opens.


An arrow indicates that additional displays can be opened.

- Swipe to the left.
- Tap arrow.



The new display opens.

## Entering letters and numbers

### Input

1.  Tap the icon on the touchscreen.  
A keyboard is displayed on the control display.
2. Enter desired letters and numbers.

### Deleting

Icon	Function
	Tapping the icon: deletes the letter or number.
	Tapping and holding the icon all letters: deletes all letters or numbers.

## Operating navigation map

The navigation map can be moved using the touchscreen.

Function	Operation
Enlarge/shrink map.	Drag in or out with the fingers.



## Programmable memory buttons

### General information



The Central Information Display (CID) functions can be stored on the programmable memory buttons and called up directly, for instance radio stations, navigation destinations, phone numbers and menu entries.

Settings are stored for the driver profile currently used.

## Storing a function

1. Select the function via the Central Information Display (CID).
2. ... Press and hold the desired button, until a signal sounds.

## Executing a function

1. ... Press the button.  
The function will work immediately. This means for instance that the connection is established when a phone number is selected.

## Displaying the key assignment

Touch buttons with finger. Do not wear gloves or use objects.

The assignment of the buttons is displayed in the upper area of the control display.

## Deleting the button assignments

1. Press buttons 1 and 6 simultaneously for approx. 5 seconds.
2. "OK"

# Voice activation system

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Principle

Most functions displayed on the control display can be operated by voice commands via the voice activation system. The system supports you with announcements during input.

## General information

- Functions that can only be used when the vehicle is stationary can only be operated via the voice activation system to a limited extent.
- The system uses a special microphone on the driver's side.
- >...< in the Owner's Manual denotes verbal instructions to use with the voice activation system.

## Functional requirements

- A language must be set via the control display that is supported by the voice

activation system. To set the language, refer to page 47.

- Always say commands in the language of the voice activation system.

## Using the voice activation system

### Activating the voice control system



Press the button on the steering wheel.

Wait for the signal tone.

Say the command.



This icon indicates that the voice activation system is active.

No other commands may be available. In this case, operate the function via the Central Information Display (CID).

### Ending the voice control system



Press the button on the steering wheel or >Cancel<.

## Possible commands

### General information


Most menu items on the control display can be spoken as commands.

Commands from other menus can also be spoken.

You can also select list entries such as phone list entries via the voice activation system. Read these list entries out loud exactly as they are shown in the respective list.

## Displaying possible commands

The following is displayed in the top area of the control display:


- Some possible commands for the current menu.
- Some possible commands from other menus.
- Status of the speech recognition.
-  Encrypted connection is not available.

## Help on the voice activation system

- >General information on voice control<: have information on the operating principle of the voice activation system read out loud.
- >Help<: have help for the current menu read out loud.

## Example: going to the sound settings

The commands of the menu items are spoken just as they are selected via the Controller.

1. Switch on the Entertainment sound output, if needed.
2.  Press the button on the steering wheel.
3. >Media and radio<
4. >Tone<


## Settings

### Setting the voice control

You can set the system to use standard dialog or a short version.

The short version of the voice control plays back short messages in abbreviated form.


Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Language"
4. "Speech mode:"
5. Select the desired setting.

## Activating speech recognition via the server

The speech recognition feature via the server provides a dictation function and a natural method of destination input while improving the quality of voice recognition. To use the functions, data is transmitted to a service provider via an encrypted connection and stored locally there.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Language"
4. "Server speech recognition"

## Adjusting the volume

Turn the volume button during the voice guidance until the desired volume is set.

- The volume remains constant even if the volume of other audio sources is changed.
- The volume is stored for the profile currently used.

## Information on Emergency Requests

Do not use the voice activation system to initiate an Emergency Request. In stressful

situations, the voice and vocal pitch can change. This can unnecessarily delay the establishment of a telephone connection.

Instead, use the SOS button, refer to page 270, close to the interior mirror.



## System limits

- Certain noises can be detected and may lead to problems. Keep the doors, windows, and glass sunroof closed.
- Noises from the front passenger or the rear seat bench can impair the system. Avoid making other noise in the vehicle while speaking.
- Major language dialects can cause problems with the speech recognition feature. Speak loud and clear.

## Using the voice activation system of the smartphone

A smartphone connected to the vehicle can be used via voice control.

Activate voice command response on the smartphone for this purpose.

1.  Press and hold the button on the steering wheel for approx. 3 seconds.  
Voice command response is activated on the smartphone.
2.  Release the button.  
If activation is successful, a confirmation appears on the control display.

If it was not possible to activate voice command response, the list of Bluetooth devices appears on the control display.

# General settings


## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Language

### Adjusting the language

Via the Central Information Display (CID):


1.  "My MINI"
2. "System settings"
3. If necessary, "Language"
4. "Language:"
5. Select the desired setting.

The setting is stored for the driver profile currently used.

## Time

### Setting the time zone


Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Date and time"
4. "Time zone:"
5. Select the desired setting.

The setting is stored for the driver profile currently used.


### Setting the time

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Date and time"
4. "Time:"
5. Turn the Controller until the desired hours are displayed.
6. Press the Controller.
7. Turn the Controller until the desired minutes are displayed.
8. Press the Controller.

### Setting the time format

Via the Central Information Display (CID):


1.  "My MINI"
2. "System settings"
3. "Date and time"
4. "Time format:"
5. Select the desired setting.

The setting is stored for the driver profile currently used.

## Date

### Setting the date


Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Date and time"

4. "Date:"
5. Turn the Controller until the desired day is displayed.
6. Press the Controller.
7. Make the settings for the month and year.

## Setting the date format

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Date and time"
4. "Date format:"
5. Select the desired setting.


The setting is stored for the driver profile currently used.

## Setting the units of measurement

---

You can configure the units of measurement for some values, e.g., electrical consumption, distance, and temperature.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Units"
4. Select the desired menu item.
5. Select the desired setting.

The setting is stored for the driver profile currently used.

## Activating/deactivating the display of the current vehicle position


---

### Principle

If vehicle tracking has been activated, the current vehicle position can be displayed in the MINI app.

### Activating/deactivating

Via the Central Information Display (CID):


1.  "My MINI"
2. "Vehicle settings"
3. "Data privacy"
4. "Vehicle tracking"
5. Select the desired setting.

## Activating/deactivating pop-ups

---

For some functions, pop-ups are displayed automatically on the control display. Some of these pop-ups can be activated or deactivated.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Pop-ups"
4. Select the desired setting.

The setting is stored for the driver profile currently used.




## Control display

---

### Brightness

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Displays"
4. "Control display"
5. "Brightness at night"
6. Turn the Controller until the desired brightness is set.
7. Press the Controller.

The setting is stored for the driver profile currently used.

Depending on the light conditions, the brightness control may not be clearly visible.

## Color world

---

### Principle

The display of the display content can be configured individually, for instance in a harmonic color style.

### General information

The setting of the color world effects the following display content:


- On-board monitor.
- Instrument cluster.
- Head-up display.

Depending on the equipment, the color world can be applied as basic display for the LED ring on the central instrument.

LED ring on the central instrument cluster, refer to page [131](#).

## Setting the color world

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Displays"
4. "Color scheme"
5. Select the desired setting.

## Notifications

---

### Principle

The menu centrally displays all messages arriving in the vehicle in list form.

### General information


The following messages can be displayed:

- Traffic messages.
- Communication messages, for example e-mails, SMS text messages or reminders.
- Check Control messages.
- Messages on service notifications.
- Messages from the vehicle manufacturer.

Notifications are additionally displayed in the status field.

### Retrieving notifications

Via the Central Information Display (CID):

1.  "Notifications"
2. Select the desired notification.



The menu in which the notification is displayed will open.

### Deleting notifications

Notifications can be deleted from the list.

Sustained Check Control messages or messages from the vehicle manufacturer with important customer information are displayed as long as they are relevant.

Via the Central Information Display (CID):


1.  "Notifications"
2. Select the desired notification.
3.  Press the button.
4. "Delete this notification" or "Delete all notifications"

## Settings

The following settings can be adjusted:

- Select the applications, from which notifications will be permitted.
- Sort the notifications according to date or priority.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Notifications"
4. Select the desired setting.

## Data protection

---

### Data transfer

#### Principle

The vehicle offers various functions which require data to be transferred to MINI or a service provider. The data transfer can be deactivated for some functions.

#### General information

With data transfer deactivated, the respective function cannot be used.

Only make these settings while stationary.

#### Activate/deactivate

Follow the instructions on the control display.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Data privacy"
4. Select the desired setting.

## Deleting personal data in the vehicle

#### Principle

Depending on the usage, the vehicle stores personal data, such as stored radio stations. This personal data can be permanently deleted via the Central Information Display (CID).

#### General information

Depending on the vehicle equipment, the following data is deleted:

- Driver profile settings.
- Stored radio stations.
- Stored programmable memory buttons.
- Trip computer and on-board computer information.
- Music collection.
- Navigation, for instance stored destinations.
- Phone book.
- Office data, for instance voice memos.
- Login accounts.

Altogether, the deletion of the data can take up to 15 minutes.


#### Functional requirement

Data can only be deleted while stationary.

## Deleting data

Note and follow the instructions on the control display.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Data privacy"
4. "Delete personal data"
5. "Delete personal data"
6. "OK"
7. Exit and lock the vehicle.

The deletion process takes 15 minutes to complete.

If not all data was deleted, repeat the deletion.

## Canceling deletion

Switch on the drive-ready state to cancel deletion of the data.

## Connections

### Principle

Various connection types are available for using mobile devices in the vehicle. The connection type to select depends on the mobile device and the desired function.

### General information

The following overview shows possible functions and the suitable connection types for them. The range of functions depends on the mobile device.

Function	Connection type
Making calls via the hands-free system.	Bluetooth.
Using phone functions via the Central Information Display (CID).	
Using the smartphone Office functions.	
Playing music from the smartphone or the audio player.	Bluetooth or USB.
Using compatible apps via the Central Information Display (CID).	Bluetooth or USB.
USB storage device:	USB.
Exporting and importing driver profiles.	
Update the software.	
Playing music.	
Playing videos from the smartphone or the USB device.	USB.
Using Apple CarPlay apps via the Central Information Display (CID) and voice operation.	Bluetooth and Wi-Fi.

The following connection types require one-time pairing with the vehicle:

- Bluetooth.
- Apple CarPlay.

Paired devices are automatically recognized later on and connected to the vehicle.

## Safety information

### Warning

Operating the integrated information systems and communication devices while driving can distract from surrounding traffic. It is possible to lose control of the vehicle. There is a risk of accident. Only use the systems or devices when the traffic situation allows. As warranted, stop and use the systems and devices while the vehicle is stationary.

## Compatible devices

### General information


Information on compatible mobile devices is available as follows:

- On the MINI homepage.
- Via Hotline/Customer Support
- At an authorized service center or another qualified service center or repair shop.

### Displaying the vehicle identification number and software part number

With a search for compatible devices, you may have to state the vehicle identification number and the software part number. These numbers can be displayed in the vehicle.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Mobile devices"
4. "Settings"
5. "Bluetooth® info"
6. "System information"

A software update, refer to page 57, can be performed.


## Bluetooth connection

### Functional requirements

- Compatible device, refer to page 52, with Bluetooth interface.
- The vehicle key is in the vehicle.
- The device is ready for operation.
- Bluetooth is activated on the device and in the vehicle, refer to page 52.
- Bluetooth default settings, such as for visibility, may be required on device; refer to your device operating instructions.

### Switching on Bluetooth


Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Mobile devices"
4. "Settings"
5. "Bluetooth®"

### Activating/deactivating telephone functions

To use all supported functions of a mobile phone, the following functions must be activated prior to pairing.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Mobile devices"
4. "Settings"
5. Select the desired setting:
  - "Office"






Activate function to transmit short messages, e-mails, calendars, tasks, memos, and reminders to the vehi-

cle. Costs can be incurred by transmitting all data to the vehicle.

- "Contact images"  
Activate function to show the contact pictures.

## Pairing the mobile device with the vehicle

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Mobile devices"
4. "Connect new device"
5. Select the functions for which the device will be used:
  -  "Telephone"
  -  "Bluetooth® audio"
  -  "Apps"
  -  "Apple CarPlay"

The vehicle's Bluetooth name is displayed on the control display.

6. On your mobile device, search for nearby Bluetooth devices.

The vehicle's Bluetooth name is shown on your mobile device's display.

Select the vehicle's Bluetooth name.

7. Depending on the mobile device, a control number is displayed or the control number must be entered.
  - Compare the control number displayed on the control display with the control number displayed on the mobile device.  
Confirm the control number on the device and on the control display.
  - Enter and confirm the same control number on the device and via the Central Information Display (CID).

The device is connected and displayed in the device list.

If connection was not successful: Frequently Asked Questions, refer to page 53.

## Frequently Asked Questions

All prerequisites are met and all required steps were completed in the specified order. Despite that, the mobile device does not function as expected.

In this case, the following explanations can help:

Why could the mobile phone not be paired or connected?

- There are too many Bluetooth devices connected to the mobile phone or vehicle.

In the vehicle, delete Bluetooth connections to other devices.

Delete all known Bluetooth connections from the mobile phone's device list and start a new device search.

- The mobile phone is in power-save mode or has only a limited remaining battery life.

Charge the mobile phone.

Why does the mobile phone no longer react?

- The applications on the mobile phone do not function anymore.

Switch the mobile phone off and on again.

- Possibly too high or too low ambient temperatures for mobile phone operation.

Do not subject the mobile phone to extreme ambient temperatures.

Why can phone functions not be used via the Central Information Display (CID)?

- The mobile phone may not be configured correctly, for example, as a Bluetooth audio device.

Connect the mobile phone with the telephone or additional telephone function.

Why are no or not all telephone book entries displayed or why are they incomplete?

- Transmission of the telephone book entries is not yet complete.
- It is possible that only the telephone book entries of the mobile phone or the SIM card are transmitted.
- It may not be possible to display telephone book entries with special characters.
- It may not be possible to transmit contacts from social networks.
- The number of phone book entries to be stored is too high.
- Data volume of the contact too large, for instance due to stored information such as memos.

Reduce the data volume of the contact.

- A mobile phone is only connected as an audio source.

Reconfigure the mobile phone and connect it with the telephone or additional telephone function.

How can the telephone connection quality be improved?

- Depending on mobile phone, it may be possible to adjust the Bluetooth signal strength on your mobile phone.
- Insert the mobile phone into the wireless charging tray.
- Adjust the volume of the microphone and loudspeakers separately.

If all points listed have been checked and the required function is still not available: contact the hotline, an authorized service

center or another qualified service center or repair shop.

## USB connection

### General information

The following mobile devices can be connected to the USB port:

- Mobile phones.  
The snap-in adapter features a separate USB port that is automatically connected when a compatible mobile phone is inserted.
- Audio devices with USB port, for instance MP3 players.
- USB storage devices.  
Common file systems are supported. FAT32 and exFAT are the recommended formats.

A connected USB device will be supplied with charge current via the USB port if the device supports this. Follow the maximum charge current of the USB port.

The following uses are possible on USB ports with data transfer:

- Exporting and importing driver profiles, refer to page 73.
- Playing music files via USB audio.
- Playing videos via USB video.
- Loading of software updates, refer to page 57.

Follow the following when connecting:

- Do not use force when plugging the connector into the USB port.
- Use a flexible adapter cable.
- Protect the USB device against mechanical damage.
- Due to the large number of USB devices available on the market, it cannot be guaranteed that every device is operable on the vehicle.

- Do not expose USB devices to extreme environmental conditions, such as very high temperatures; refer to the operating instructions of the device.
- Due to the many different compression techniques, proper playback of the media stored on the USB device cannot be guaranteed in all cases.
- To ensure proper transmission of the stored data, do not charge a USB device via the onboard socket, when it is connected to the USB port.
- Depending on how the USB device is being used, settings may be required on the USB storage device, refer to the operating instructions of the device.

Not compatible USB devices:

- USB hard drives.
- USB hubs.
- USB memory card readers with multiple slots.
- HFS-formatted USB devices.
- Devices such as fans or bulbs.

### Functional requirement

Compatible device, refer to page 52, with USB port.

### Connecting the device

Connect the USB device using a suitable adapter cable to a USB port, refer to page 204.

The USB device is connected to the vehicle and displayed in the device list.

## Apple CarPlay<sup>®</sup>

### Principle


CarPlay allows select functions of a compatible Apple iPhone to be used via Siri voice control and the on-board monitor.

### Functional requirements

- iPhone 5 or later with iOS 7.1 or later. Compatible iPhone, refer to page 52.
- Corresponding mobile contract.
- Bluetooth, Wi-Fi, and Siri voice control are activated on the iPhone.
- If necessary, the setting for mobile data must be activated on the iPhone.
- Wi-Fi and Bluetooth are enabled in the vehicle.

### Turning on Bluetooth and CarPlay

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Mobile devices"
4. "Settings"
5. Select the following settings:
  - "Bluetooth<sup>®</sup>"
  - "Apple CarPlay"

### Pairing the iPhone with CarPlay

Pairing an iPhone with the vehicle, refer to page 53, via Bluetooth

Select CarPlay as the function:

- ▶  "Apple CarPlay"

The iPhone is connected to the vehicle and displayed in the device list, refer to page 56.

### Operation

For more information, refer to the Integrated Owner's Manual or the Owner's Manual for Navigation, Entertainment, Communication.

### Frequently Asked Questions

All prerequisites are met and all required steps were completed in the specified order.

Despite that, the mobile device does not function as expected.

In this case, the following explanations can help:

The iPhone has already been paired with Apple CarPlay. When a new connection is set up, CarPlay can no longer be selected.

- Delete the iPhone concerned from the device list.
- On the iPhone, delete the vehicle concerned from the list of stored vehicles under Bluetooth and under Wi-Fi.
- Pair the iPhone as a new device.

If the steps listed have been carried out and the required function is still not available: contact the hotline, an authorized service center, or another qualified service center or repair shop.

## Managing mobile devices


### General information

- After one-time pairing, the devices are automatically recognized and reconnected when standby state is switched on.
- The data stored on the SIM card or in the mobile phone is transferred to the vehicle after recognition.
- For some devices, certain settings may be necessary, for instance authorization, see operating instructions of the device.






### Displaying the device list

All devices paired and/or connected with the vehicle are displayed in the device list.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Mobile devices"


An icon indicates, for which function a device is used.

Icon	Function
	"Telephone"
	"Additional telephone"
	"Bluetooth® audio"
	"Apps"
	"Apple CarPlay"

### Configuring the device

Functions can be activated or deactivated for paired and connected devices.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Mobile devices"
4. Select the desired device.
5. Select the desired setting.


If a function is assigned to a device, the function will be deactivated where appropriate for a device that is already connected and the device will be disconnected.

### Disconnecting the device

The device's connection to the vehicle is disconnected.

The device remains paired and can be connected again, refer to page 57.


Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Mobile devices"
4. Select device.
5. "Disconnect device"



## Connecting the device


A disconnected device can be reconnected. Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Mobile devices"
4. Select device.
5. "Connect device"

The functions that were assigned to the device before disconnecting are assigned to the device when it is reconnected. The functions may be deactivated on a device already connected.

## Deleting the device

Via the Central Information Display (CID):


1.  "My MINI"
2. "System settings"
3. "Mobile devices"
4. Select device.
5. "Delete device"

The device is disconnected and removed from the device list.

## Swapping the telephone and additional telephone

If two mobile phones are connected to the vehicle, the functions of the telephone and additional telephone can be switched.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Mobile devices"
4. "Settings"
5. "Swap telephone/additional tel."

## Software update

### General information


The vehicle supports a large number of mobile devices, for instance mobile phones and MP3 players. Software updates are available for many of the supported devices. The vehicle is kept up-to-date via regular vehicle software updates.

For information on available software updates, contact an authorized service center or another qualified service center or repair shop.

### Displaying the version of the installed software

The software version installed in the vehicle is displayed.

Via the Central Information Display (CID):


1.  "My MINI"
2. "System settings"
3. "Software update"
4. "Show current version"

If an update has been carried out before, select the desired version to display additional information.

### Updating software via USB

The software may only be updated when the vehicle is stationary.

Via the Central Information Display (CID):

1. Store the file for the software update in the main folder of a USB device.
2. Connecting USB device to the USB port.
3.  "My MINI"
4. "System settings"
5. "Software update"
6. "Update software"
7. "USB"


8. "Install software"
9. "OK"
10. Wait for the update to complete.
11. Confirm system restart.

### Restoring the software version

You can restore the software to the version prior to the last update or to its factory settings.

The software may only be restored when the vehicle is stationary.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Software update"
4. "Restore software"
5. – "Previous version"
  - The previous software version is re-stored.
  - "Default software settings"
    - The first software version is re-stored.
6. "Remove software"
7. "OK"
8. Wait for software restore.
9. Confirm system restart.

# MINI eDRIVE

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Principle

This MINI is an electric vehicle. The vehicle features a high-voltage system that consists of an electric motor and a high-voltage battery among other things.


## General information

The eDRIVE system exhibits the following special features:

- Vehicle operation is emissions-free using the electrical drivetrain.
- The special high-voltage battery supplies the electric motor as well as the comfort features with power.
- The high-voltage battery is charged via a charging cable, for instance when parked or while driving utilizing energy recovery.
- The vehicle can be charged very rapidly at special charging stations. Charging is also possible at domestic socket outlets.

- On the go, the energy recovery ensures that only little energy is lost when braking.
- When the vehicle decelerates, the electric motor acts as an alternator and converts the kinetic energy released into electric current.
- This partially recharges the high-voltage battery to increase the range.

## Overview

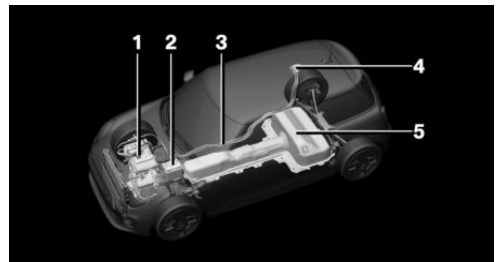

- 1 Drive unit
- 2 Vehicle battery
- 3 High-voltage cables
- 4 Charging socket
- 5 High-voltage battery

## Functions

### Electric driving: eDRIVE

The vehicle is powered by the electric motor. The accelerator pedal can be used not just for acceleration, but also for deceleration. When the vehicle decelerates, the electric motor acts as an alternator and charges the high-voltage battery. With a sensible driving style, this function can be

used for especially efficient energy recovery and comfortable driving, using just the accelerator pedal.

## Acoustic pedestrian protection

The system generates a continuous driving noise during electric driving at low speeds.

## Coasting

An especially efficient operating point is so-called coasting. In this case, the vehicle is decelerated only by driving resistance and no energy flows between high-voltage battery and electric motor. In order to coast, depress the accelerator pedal far enough so that the needle in the power gauge, refer to page 119, is between the areas for ePOWER and CHARGE.

## Energy recovery: CHARGE

The high-voltage battery is charged while driving through energy recovery.

The electric motor acts as an alternator and converts the kinetic energy of the vehicle into electrical energy.

Charging can take place in various situations while the vehicle is in motion:

- As soon as the accelerator pedal is only slightly depressed.
- As soon as the accelerator pedal is not depressed.

The needle in the instrument cluster is located in the CHARGE area.

## Display

The eDRIVE displays, refer to page 119, provide information about the current state of the drivetrain and visualize the system's use in a diagram.

## Energy-saving driving and maximizing the range

Energy-saving driving is the basic prerequisite for as large a range as possible. eDRIVE provides various functions that assist with an energy-saving driving style and help to check the range, and if needed, to increase it. The following descriptions provide an overview of the available functions and the personal measures.

### Before driving

eDRIVE allows operation of the air conditioning system even before start of the trip. The pre-conditioning, refer to page 195, provides more range than using full air conditioning while driving.

Preheating/precooling during the charging process can provide maximum range when driving off.

### Trip planning and special functions of the navigation system

Several special functions of the navigation system support trip planning taking into account the electric range:

- Range assistant, refer to Integrated Owner's Manual, checks whether an entered navigation destination can be reached. If the range is not sufficient, various recommendations to increase the range are displayed automatically, e.g., a consumption-optimized route based on driving in GREEN mode.
- Range map indicates the action range on the navigation map, refer to Integrated Owner's Manual.
- Charging assistant under points of interest in navigation, helps to find and possibly include a public charging station in the desired route, refer to Integrated Owner's Manual.

## During driving

- General driving tips, refer to page 222, for increasing the range.
- Use the eDRIVE system efficiently, refer to page 223, for an optimized driving style.
- MINIMALISM Analyzer, refer to page 226, to analyze the driving style.
- GREEN and GREEN +, refer to page 224, driving mode for increasing the range.
- Information about auxiliary users and the range potential, refer to page 120.

## After the trip

- Charge vehicle, refer to page 228, and plan next trip.
- Take note of required preparations for extended stationary periods, refer to page 238.

## MINI app

The MINI app provides mobility-based services and applications.

## Safety of the high-voltage system

Follow the information on safety, refer to page 62.

## Operating noises

Operating noises may occur due to the electrical system. For instance, these operating noises may occur in the following situations:

- When cooling the high-voltage battery during the charging process.
- When cooling the high-voltage battery with the drive-ready state switched on.
- When climatizing the car's interior.

## High-voltage battery, long stationary periods

Follow the instructions for taking the vehicle out of service and for longer stationary periods, refer to page 238.

# Safety of the high-voltage system

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Working on the vehicle

### General information

The manufacturer of the vehicle recommends that no changes be made to the vehicle, for instance installation of retrofitting accessories, that will have an effect on the vehicle's high-voltage system.

### Safety information

 **Warning**

Improperly performed work, in particular maintenance and repair on the high-voltage system, can lead to electric shock. There is a risk of injury, fire and danger to life.

The manufacturer of the vehicle recommends that the work on the vehicle, in particular maintenance and repair, be performed by an authorized service center or another qualified service center or repair shop.

## Contact with water

The high-voltage system is typically safe even in the following example situations:

- Water in the footwell, for instance after a rainstorm when the window was kept open.
- Vehicle is in water but only up to the permitted clearance height, refer to page 219.
- Fluid escapes in the cargo area.

## Monitoring of the high-voltage battery

### Principle

The temperature in the high-voltage battery is monitored.

Any unusually high temperature in the high-voltage battery is indicated.

### Safety information

 **Warning**

An unusually high temperature of the high-voltage battery can cause a formation of gas and smoke. There is a risk of injury or danger to life. In case of noticeable unusual odor or smoke formation, refer to the notes for actions in the event of a message.

### High temperature message

While driving:

A Check Control message is displayed.

While driving:

Depending on the national-market version: the vehicle sounds the horn and, if applicable, the vehicle lighting is flashing.

## Actions in the event of a message

While driving:

1. Stop immediately.
2. Park the vehicle in a safe place.
3. Exit the vehicle.
4. Establish and keep a sufficient distance to the vehicle.
5. Alert emergency personnel.

During and shortly after the charging process:

1. If necessary, exit the vehicle.
2. Establish and keep a sufficient distance to the vehicle.
3. Alert emergency personnel.

## Automatic deactivation

If an accident occurs, the high-voltage system is switched off automatically to prevent risk of danger to occupants and other road users.

Read the information on What to do after an accident, refer to page [274](#).

# Opening and closing

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Vehicle key

### General information

Two vehicle keys are included in the scope of delivery, each containing an integrated key.

Each vehicle key contains a replaceable battery, refer to page 67.

Depending on the equipment and country version, various settings, refer to page 76, can be configured for the button functions.

A personal driver profile, refer to page 73, for each vehicle key is stored in the vehicle.

To provide information on maintenance recommendations, the service data is stored in the vehicle key, refer to page 261.

To prevent possible locking in of the vehicle key, take the vehicle key with you when exiting the vehicle.

## Safety information

### Warning

The vehicle key has a button cell battery. Batteries or button cell batteries can be swallowed and lead to serious or fatal injuries within two hours, for example due to internal burns or chemical burns. There is a risk of injury or danger to life. Keep the vehicle key and batteries out of reach of children. Immediately seek medical help if there is any suspicion that a battery or button cell battery has been swallowed or is located in any part of the body.

### Warning

People or animals in the vehicle can lock the doors from the inside and lock themselves in. In this case, the vehicle cannot be opened from the outside. There is a risk of injury. Take the vehicle key with you so that the vehicle can be opened from the outside.

### Warning


Unattended children or animals in the vehicle can cause the vehicle to move and endanger themselves and traffic, for instance due to the following actions:

- Pressing the Start/Stop button.
- Releasing the parking brake.
- Opening and closing the doors or windows.
- Engaging selector lever position N.
- Using vehicle equipment.



There is a risk of accidents or injuries. Do not leave children or animals unattended in the vehicle. Take the vehicle key with you when exiting and lock the vehicle.

## Overview

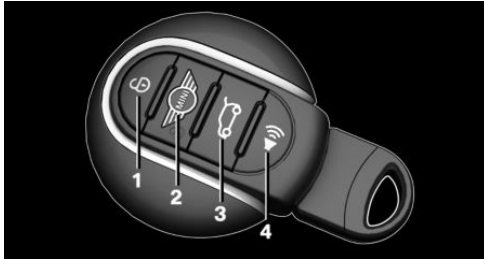

- 1 Unlocking
- 2 Locking
- 3 Unlocking the tailgate
- 4 Panic mode

## Unlocking

 Press the button on the vehicle key.

Depending on the settings, refer to page 76, the following access points are unlocked.

- Driver's door.  
Press the button on the vehicle key again to unlock the other vehicle access points.

- All doors and tailgate.

In addition, the following functions are executed:

- Unlocking is confirmed by the turn signals and the horn. This function must be activated in the settings, refer to page 76.
- The settings stored in the driver profile, refer to page 73, are applied.

- The interior lights, refer to page 139, and the MINI logo projection are switched on, provided that the interior lights were not switched off manually.
- Depending on the settings, the welcome light and pathway lighting, refer to page 136, are switched on.
- The alarm system, refer to page 77, is switched off.


The lighting functions may depend on the ambient brightness.

## Convenient opening

 Press and hold the button on the vehicle key after unlocking.

The windows and the glass sunroof are opened, as long as the button on the vehicle key is pressed.

## Locking

1. Close the driver's door.
2.  Press the button on the vehicle key.

The following functions are executed:

- All doors and the tailgate are locked.
- Locking is confirmed by the turn signals and the horn. This function must be activated in the settings, refer to page 76.
- The alarm system, refer to page 77, is switched on.

If the drive-ready state is still switched on when you lock the vehicle, the vehicle horn honks twice. In this case, the drive-ready state must be switched off by means of the Start/Stop button.


## With Comfort Access: convenient closing

### Safety information

#### **Warning**

With convenient closing, body parts can be jammed. There is a risk of injury. Make sure that the area of movement of the doors is clear during convenient closing.

### Closing

 Press and hold the button on the vehicle key in close range to the vehicle.

The windows and the glass sunroof are closed, as long as the button on the vehicle key is pressed.

## Switch on interior lights and courtesy lights

 Press the button on the vehicle key with the vehicle locked.

The MINI logo projection is also switched on.

These functions are not available if the interior lights were switched off manually.

The lighting functions may depend on the ambient brightness.

After locking, wait 10 seconds before pressing the button again.

## Tailgate

### General information

To avoid locking the vehicle key in the vehicle, do not place the vehicle key in the cargo area.

Depending on the vehicle equipment and country version, it is possible to specify

whether the tailgate can be unlocked with the vehicle key and how the vehicle doors will respond to this. To perform settings, refer to page 76.

### Safety information

#### **Warning**

Body parts can be jammed when operating the tailgate. There is a risk of injury. Make sure that the travel path of the tailgate is clear during opening and closing.

#### **Warning**

The tailgate swings back and up when it opens. There is a risk of injury or risk of damage to property. Make sure that the travel path of the tailgate is clear during opening and closing.

#### **Warning**

Sharp-edged or pointed objects can hit the windows and heating elements while driving. There is a risk of injury or risk of damage to property. Cover the edges and ensure that pointed objects do not hit the windows.

### Opening

 Press and hold the button on the vehicle key for approx. 1 second.

The tailgate is unlocked and can be swung upward.

### Panic mode

You can trigger the alarm system if you find yourself in a dangerous situation.



- Press the button on the vehicle key and hold for at least 3 seconds.
- Briefly press the button on the vehicle key three times in succession.


To switch off the alarm: press any button.

## Replacing the battery


### NOTICE

Improper batteries in a battery-operated device can damage the device. There is a risk of damage to property. Always replace the discharged battery with a battery with the same voltage, the same size and the same specification.


1. Remove the integrated key from the vehicle key, refer to page 69.
2. Slide the integrated key into the opening and raise the cover. The battery compartment is accessible.

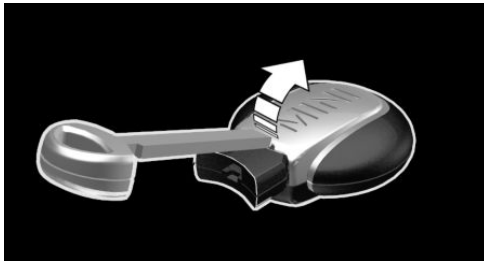

3. Slide the integrated key in the cover of the battery compartment and raise the cover.

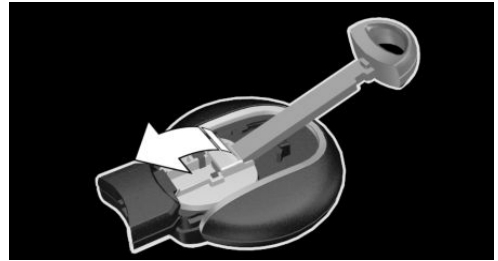

4. Push battery in arrow direction using a pointed object and lift it out.

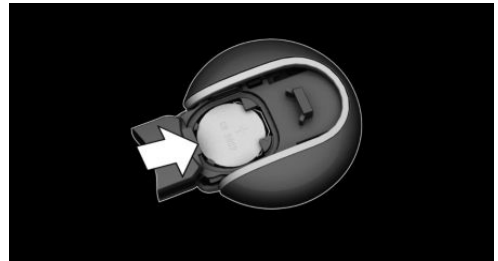

5. Insert a type CR 2032 3V battery with the positive side facing up.
6. Insert lid and cover.
7. Push the integrated key into the vehicle key until it engages.



Have old batteries disposed of by an authorized service center or another qualified service center or repair shop, or take them to a collection point.

## Additional vehicle keys

Additional vehicle keys are available from an authorized service center or another qualified service center or repair shop.

## Loss of vehicle keys

A lost vehicle key can be disabled and replaced by an authorized service center or

another qualified service center or repair shop.

## Malfunction

### General information

A Check Control message is displayed.

Vehicle key detection by the vehicle may malfunction under the following circumstances:

- The battery of the vehicle key is discharged. For replacing the battery, refer to page 67.
- Fault of the radio link from transmission towers or other equipment with high transmitting power.
- Shielding of the vehicle key due to metal objects.

Do not transport the vehicle key together with metal objects.

- Fault of the radio link from mobile phones or other electronic devices in direct proximity to the vehicle key.

Do not carry the vehicle key in close proximity to other electronic devices.

- Fault of radio transmission by a charging process of mobile devices, for instance charging of a mobile phone.
- The vehicle key is in direct proximity of the wireless charging tray.

Place the vehicle key in a different location.

In the case of interference, the vehicle can be unlocked and locked from the outside with the integrated key, refer to page 69.

## Switching on the drive-ready state via emergency detection of the vehicle key



It is not possible to switch on the drive-ready state if the vehicle key has not been detected.

Proceed as follows in this case:

1. Hold the vehicle key against the mark on the steering column as shown. Pay attention to the display in the instrument cluster.
2. If the vehicle key is detected:  
Turn on drive-ready state within 10 seconds.

If the vehicle key is not recognized, slightly change the position of the vehicle key and repeat the procedure.

## Frequently Asked Questions

What precautions can be taken to be able to open a vehicle, despite accidentally locking in the vehicle key?

- The options provided by the Remote Services of the MINI Connected app include the ability to lock and unlock a vehicle.

This requires an active MINI Connected contract and the MINI Connected app must be installed on a smartphone.

- Unlocking the vehicle can be requested via the MINI Connected Call Center.

An active MINI Connected contract is required.

## Integrated key

### General information


The driver's door can be locked and unlocked without the vehicle key using the integrated key.

### Safety information

#### NOTICE

The door lock is permanently joined with the door. The door handle can be moved. When pulling the door handle with the integrated key inserted, paint or the integrated key can be damaged. There is a risk of damage to property. Remove the integrated key before pulling the external door handle.

### Removing

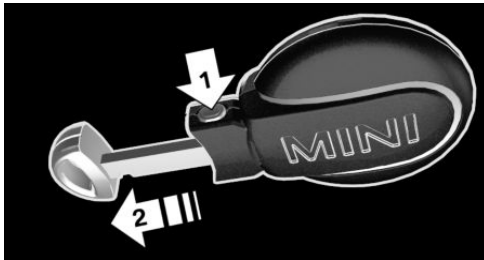


Press the button, arrow 1, and pull out the integrated key, arrow 2.

### Locking/unlocking via the door lock

1. Remove cover cap on the door lock.

To do this, slide the integrated key into the opening to the stop from below and remove the cover cap.

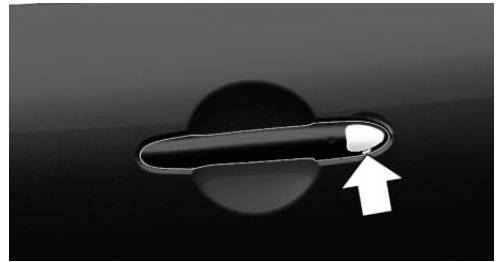

2. Unlock or lock the door lock using the integrated key.

The other doors must be unlocked or locked from the inside.

### Alarm system

The alarm system is not switched on if the vehicle is locked with the integrated key.

The alarm system is triggered when the door is opened, if the vehicle has been unlocked via the door lock.

## Buttons for the central locking system

### General information

In the event of a severe accident, the vehicle is automatically unlocked. The hazard warning system and interior lights come on.

## Overview



Buttons for the central locking system.

## Locking



The vehicle is not secured against theft when locking.

## Unlocking



Press the button.

## Opening



- Press button to unlock the doors together, and then pull the door handle above the armrest.

## Comfort Access

### Principle

The vehicle can be accessed without operating the vehicle key.

Carrying the vehicle key with you, e.g., in your pants pocket, is sufficient.

The vehicle automatically detects the vehicle key when it is in close proximity or in the interior.

## General information


Comfort Access supports the following functions:

- Unlocking and locking the vehicle.
- Convenient closing.
- Open the tailgate.

## Functional requirements

- To lock the vehicle, the vehicle key must be outside of the vehicle near the doors.
- The next unlocking and locking cycle is not possible until after approx. 2 seconds.

## Unlocking

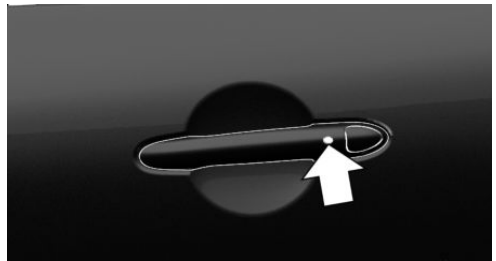


Press the button on the door handle of the driver's or front passenger door.

Depending on the settings, refer to page 76, only the driver's door may be unlocked. Unlike when unlocking using the vehicle key, pressing the button on the door handle again does not unlock the other vehicle access points. Rather, the vehicle is locked again.

If the vehicle was locked automatically after driving off or using the central locking system button from the inside, note the following: If a door on a locked vehicle is opened from the inside using the door opener, pressing the button on the door handle will first lock the vehicle again. To unlock, press the button on the door handle again.

## Locking

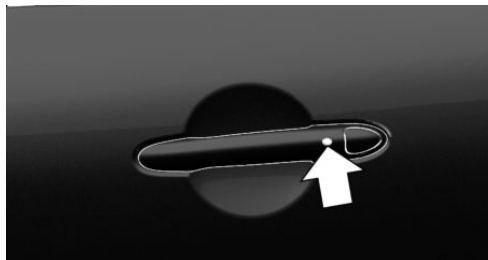

Press the button on the door handle of the driver's or front passenger door.


## Convenient closing

### Safety information

#### Warning

With convenient closing, body parts can be jammed. There is a risk of injury. Make sure that the area of movement of the doors is clear during convenient closing.

## Closing

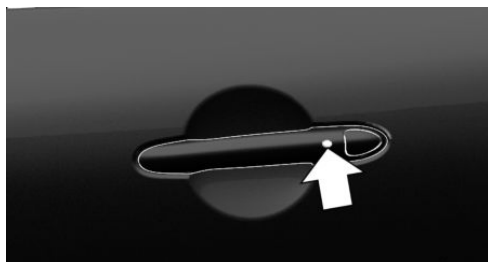

Press and hold down the button on the external door handle of the driver's or front passenger door.

In addition to locking, the windows and glass sunroof will be closed.

## To open the tailgate

### General information

If the tailgate is opened via Comfort Access, locked doors are not unlocked.

To avoid locking the vehicle key in the vehicle, do not place the vehicle key in the cargo area.

### Safety information

#### Warning

Body parts can be jammed when operating the tailgate. There is a risk of injury. Make sure that the travel path of the tailgate is clear during opening and closing.

#### Warning

The tailgate swings back and up when it opens. There is a risk of injury or risk of damage to property. Make sure that the travel path of the tailgate is clear during opening and closing.

#### Warning

Sharp-edged or pointed objects can hit the windows and heating elements while driving. There is a risk of injury or risk of damage to property. Cover the edges and ensure that pointed objects do not hit the windows.

## Opening



Press button next on tailgate.

The tailgate is unlocked and can be swung upward.

## Malfunction

Vehicle key detection by the vehicle may malfunction under the following circumstances:

- The battery of the vehicle key is discharged. For replacing the battery, refer to page 67.
- Fault of the radio link from transmission towers or other equipment with high transmitting power.
- Shielding of the vehicle key due to metal objects.

Do not transport the vehicle key together with metal objects.

- Fault of the radio link from mobile phones or other electronic devices in direct proximity to the vehicle key.

Do not carry the vehicle key in close proximity to other electronic devices.

Wet or snowy conditions may disrupt the locking request detection on the door handles.

In the case of a malfunction, unlock and lock the vehicle using the buttons of the vehicle key or use the integrated key, refer to page 69.

## Tailgate

### General information

To avoid locking the vehicle key in the vehicle, do not place the vehicle key in the cargo area.

Depending on the vehicle equipment and country version, it is possible to specify whether the tailgate can be unlocked with the vehicle key and how the vehicle doors will respond to this. To perform settings, refer to page 76.

### Safety information

#### Warning

Body parts can be jammed when operating the tailgate. There is a risk of injury. Make sure that the travel path of the tailgate is clear during opening and closing.

#### Warning

The tailgate swings back and up when it opens. There is a risk of injury or risk of damage to property. Make sure that the travel path of the tailgate is clear during opening and closing.

#### Warning


Sharp-edged or pointed objects can hit the windows and heating elements while driving. There is a risk of injury or risk of damage to property. Cover the edges and ensure that pointed objects do not hit the windows.



## Opening and closing

### Opening from the outside





- Without Comfort Access: unlock vehicle.  
With Comfort Access: unlock the vehicle or have the vehicle key with you.  
Press button next on tailgate.
-  Press and hold the button on the vehicle key for approx. 1 second.

Depending on the setting, the doors may also be unlocked. Unlocking using the vehicle key, refer to page 66.

The tailgate is unlocked and can be swung upward.

### Opening from the inside

-  With Steptronic transmission:  
With the vehicle stationary, press the button in the driver's footwell.  
If the vehicle is locked, selector lever position P must be engaged first.

-  With manual transmission:  
With the vehicle stationary, press the button in the driver's footwell twice in quick succession.

### Closing



Recessed grips on the interior trim of the tailgate can be used to conveniently pull down the tailgate.

## Driver profiles

### Principle

In the driver profiles, individual settings for several drivers can be stored and called up again when required.

### General information

There are three driver profiles with which personal vehicle settings can be stored. Every vehicle key has been assigned one of these driver profiles.

If the vehicle is unlocked using the vehicle key, the assigned personal driver profile will be activated. All settings stored in the driver profile are automatically applied.

If several drivers use their own vehicle keys, the vehicle will apply the personal settings as it is being unlocked. These settings are also restored, if the vehicle has been used in the meantime by a person with a different vehicle key.

Changes to the settings are automatically stored in the driver profile currently activated.

If another driver profile is selected via the Central Information Display (CID), the set-

tings stored in it will be applied automatically. The new driver profile is assigned to the vehicle key that is currently in use.

There is an additional guest profile available that is not assigned to any vehicle key: it can be used to apply settings in the vehicle without changing the personal driver profiles.

## Functional requirements

For the system to be able to identify the driver profile associated to a particular driver, the detected vehicle key must be clearly allocated to the driver.

This is the case when:

- The driver is only carrying his or her own vehicle key.
- The driver unlocks the vehicle.
- The driver gets into the vehicle through the driver's door.

## Settings

The settings, for instance for the following systems and functions, are stored in the active profile. The scope of storable settings depends on country and equipment.

- Unlocking and locking.
- Lights.
- Radio.
- Instrument cluster.


- Programmable memory buttons.
- Volumes, sound.
- Control display.
- Climate control.
- Navigation.
- Park Distance Control.
- Rearview camera.
- Head-up display.
- MINI Driving Modes.
- Intelligent Safety.

## Profile management

### Selecting a driver profile

Regardless of the vehicle key in use, a different driver profile may be activated. This allows you to call up personal vehicle settings, even if you did not unlock the vehicle with your own vehicle key.

Via the Central Information Display (CID):

1.  "My MINI"
  2. "Driver profiles"
  3. Select driver profile.
  4. "OK"
- All settings stored in the selected driver profile are automatically applied.
  - The called-up driver profile is assigned to the vehicle key being used at the time.
  - If the driver profile is already assigned to a different vehicle key, this driver profile will be valid for both vehicle keys.

### Using a guest profile

The guest profile is for individual settings that are stored in none of the three personal driver profiles.

Via the Central Information Display (CID):



1.  "My MINI"
2. "Driver profiles"
3. "Drive off (guest)"
4. "OK"

The guest profile cannot be renamed. It is not assigned to the vehicle key currently in use.

### Renaming a driver profile

A personal name can be assigned to the active driver profile to avoid confusion between the driver profiles.



Via the Central Information Display (CID):

1.  "My MINI"
2. "Driver profiles"
3. Select driver profile.
  -  The driver profile marked with this icon can be renamed.
4. "Change driver profile name"
5. Enter profile name.
6. **OK** Select the icon.

### Resetting a driver profile

The settings of the driver profile currently in use are reset to their factory settings.

Via the Central Information Display (CID):



1.  "My MINI"
2. "Driver profiles"
3. Select driver profile.
  -  The driver profile marked with this icon can be reset.
4. "Reset driver profile"
5. "OK"

### Exporting driver profiles

Most settings of the active driver profile can be exported.

Exporting is helpful when storing and retrieving personal settings, for instance prior to a workshop visit. The stored driver profiles can be taken into another vehicle.

Via the Central Information Display (CID):



1.  "My MINI"
2. "Driver profiles"
3. Select driver profile.
  -  The driver profile marked with this icon can be exported.
4. "Export driver profile (USB)"
  - Select USB storage device as needed.

### Importing driver profiles

Profiles stored on a USB device can be imported via the USB port.

The existing settings of the active driver profile are overwritten with the settings of the imported driver profile.


Via the Central Information Display (CID):

1.  "My MINI"
2. "Driver profiles"
3. Select the driver profile to overwrite.
  -  The driver profile marked with this icon can be overwritten.
4. "Import driver profile (USB)"
  - Select USB storage device as needed.
5. Select the driver profile to be imported.

### Displaying driver profiles during start

The driver profiles can be displayed at each startup to select the desired profile.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Driver profiles"
3. "Show driver profiles at startup"

## System limits

A clear assignment between the vehicle key and driver may not be possible in the following cases, for example.

- The front passenger unlocks the vehicle with his or her own vehicle key, but another person is driving.
- The driver unlocks the vehicle via Comfort Access and has multiple vehicle keys with him or her.
- The driver changes, but the vehicle is not locked and unlocked.
- Multiple vehicle keys are located in the outer area of the vehicle.

## Settings

### General information


Depending on the package and country version, various settings are available for the vehicle key functions.

These settings are stored for the driver profile, refer to page 73, currently used.

### Unlocking



#### Doors

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Doors/Key"
4. "Driver's door" or "All doors"
5. Select the desired setting:
  - "Driver's door only"  
Only the driver's door is unlocked. Pressing again unlocks the entire vehicle.
  - "All doors"  
The entire vehicle is unlocked.

### Tailgate


Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Doors/Key"
4. 
  - The text next to the icon indicates the current setting.
5. Select the desired setting:
  - "Tailgate"  
Only the tailgate is unlocked.
  - "Tailgate and door(s)"  
The tailgate and the doors are unlocked.
  - "Tailgate opens after unlocking"  
The vehicle must be unlocked before the tailgate can be used with the vehicle key.
  - "Button lock"  
The operation of the tailgate via the vehicle key is disabled.

Depending on the vehicle equipment and country version, this setting may not be offered.


### Automatic locking

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Doors/Key"
4. Select the desired setting:
  - "Lock automatically"  
The vehicle locks automatically after a while if no door is opened after unlocking.
  - "Lock after starting to drive"  
The vehicle locks automatically after you drive off.

## Automatic unlocking


Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Doors/Key"
4. "Unlock at end of trip"

After drive-ready state is switched off by pressing the Start/Stop button, the locked vehicle is automatically unlocked.

## Confirmation signals from the vehicle

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Doors/Key"
4. Deactivate or activate the desired confirmation signals.
  - "Flash for lock/unlock"
 

Unlocking is signaled by flashing twice, locking by flashing once.
  - With alarm system:
 

"Acoustic signal for lock/unlock"

Unlocking is signaled by one honk of the horn.

## Alarm system

### General information

When the vehicle is locked, the vehicle alarm system reacts to the following changes:

- Unauthorized opening of a door, the hood or the tailgate.
- Movements in the vehicle interior.

- Changes in the vehicle inclination, such as during attempts at stealing a wheel or when towing the vehicle.
- Disconnected battery voltage.
- Improper use of the socket for OBD on-board diagnostics.
- Locking the vehicle while a device is connected to the diagnostic socket. For socket for the OBD on-board diagnostics, refer to page 262.

The alarm system signals these changes visually and acoustically:


- Acoustic alarm:
 

Depending on local regulations, the acoustic alarm may be suppressed.
- Optical alarm:
 

By flashing of the hazard warning system and headlights, where required.

Do not modify the system to ensure function of the alarm system.

### Overview

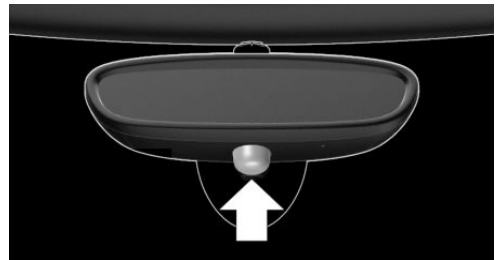

Indicator light on the interior mirror.

### Turning on/off

The alarm system is switched on or off as soon as the vehicle is locked with the vehicle key or unlocked or locked via Comfort Access.

## Opening the doors with the alarm system switched on

The alarm system is triggered when a door is opened if the door was unlocked using the integrated key in the door lock.

End alarm, refer to page 79.

## Opening the tailgate with the alarm system switched on

The tailgate can be opened even when the alarm system is switched on.

After the tailgate is closed, it is locked and monitored again provided the doors are locked. The hazard warning system flashes once.

## Panic mode

You can trigger the alarm system if you find yourself in a dangerous situation.



- Press the button on the vehicle key and hold for at least 3 seconds.
- Briefly press the button on the vehicle key three times in succession.

To switch off the alarm: press any button.

## Signals of the indicator light

- The indicator light flashes briefly every 2 seconds:  
The alarm system is switched on.
- Indicator light flashes for approx. 10 seconds, then it flashes briefly every 2 seconds:  
Interior motion sensor and tilt alarm sensor are not active, as doors, hood, or tailgate are not correctly closed. Correctly closed access points are secured.  
Interior motion sensor and tilt alarm sensor are not active, as doors, hood, or trunk lid are not correctly closed. Correctly closed access points are secured.

When the still open access points are closed, the interior motion sensor and tilt alarm sensor will be switched on.

- The indicator light goes out after unlocking:  
The vehicle has not been tampered with.
- The indicator light flashes after unlocking until standby state is switched on, but no longer than approx. 5 minutes:  
An alarm has been deployed.

## Tilt alarm sensor

The inclination of the vehicle is monitored. The alarm system responds in situations such as attempts to steal a wheel or when the vehicle is towed.

## Interior motion sensor

The vehicle interior is monitored. The alarm system responds when movement is detected in the vehicle interior. The windows and the glass sunroof must be closed for the system to function properly.

## Avoiding unintentional alarms

### General information

The tilt alarm sensor and interior motion sensor can trigger an alarm, although no unauthorized action occurred. Possible situations for an unwanted alarm:

- In car washes.
- In duplex garages.
- During transport on trains carrying vehicles, at sea or on a trailer.
- With animals in the vehicle.

The tilt alarm sensor and the interior motion sensor can be switched off in such situations.

## Switching off the tilt alarm sensor and interior motion sensor



Press the button on the vehicle key within 10 seconds as soon as the vehicle is locked.

The indicator light illuminates for approx. 2 seconds and then continues to flash.

The tilt alarm sensor and interior motion sensor are switched off until the vehicle is locked again.

## Ending the alarm

- Unlock the vehicle with the vehicle key.
- Unlock the vehicle with the integrated key and activate the standby state via emergency detection of the vehicle key, refer to page 68.
- With Comfort Access: if you have the vehicle key with you, unlock the vehicle using the button on the driver's side or front passenger side door.

## Power windows

### General information

If an accident of a certain severity occurs, the windows are automatically closed except a gap.

### Safety information

#### Warning



When operating the windows, body parts and objects can be jammed. There is a risk of injury or risk of damage to property. Make sure that the travel path of the windows is clear during opening and closing.

## Overview





Power windows

## Opening

-  Press the switch to the resistance point.  
The window opens while the switch is being held.
-  Press the switch beyond the resistance point.  
The window opens automatically. Pressing the switch again stops the motion.

Convenient opening with the vehicle key, refer to page 65.

## Closing

-  Pull the switch to the resistance point.  
The window closes while the switch is being held.
-  Pull the switch beyond the resistance point.  
The window closes automatically if the door is closed. Pulling the switch again stops the motion.

Convenient closing with the vehicle key, refer to page 66.

Closing via Comfort Access, refer to page 71.

## Jam protection system

### Principle

The jam protection prevents objects or body parts becoming jammed between the door frame and window while a window is being closed.

### General information

If resistance or a blockage is detected while a window is being closed, the closing action is interrupted.



### Safety information

#### Warning

Accessories on the windows such as antennas can impact jam protection. There is a risk of injury. Do not install accessories in the area of movement of the windows.

### Closing without the jam protection system

In case of danger from the outside or if icing might prevent normal closing, proceed as follows:

-  Pull the switch past the resistance point and hold it there.  
 The window closes with limited jam protection. If the closing force exceeds a specific threshold, closing is interrupted.
-  Pull the switch past the resistance point again within approx. 4 seconds and hold it there.  
 The window closes without jam protection.

## Malfunction

### General information

In certain situations a window can only be operated to a limited extent.

- After a power interruption during the opening or closing process, the window can only be operated to a limited extent. The system must be initialized in this case.
- The power window motors are equipped with overheating protection. If a window is opened and closed several times within a short period of time, the overheating protection switches the motor off temporarily. Depending on the degree of overheating, it may only be possible to close the window or it may not be possible to operate it at all.  
 In this case: allow the power window motor to cool down.


### Initializing the system

The system can be initialized when the vehicle is stationary and the drive-ready state is switched on.


During initialization, the affected window closes without jam protection.

#### Warning

When operating the windows, body parts and objects can be jammed. There is a risk of injury or risk of damage to property. Make sure that the travel path of the windows is clear during opening and closing.

1. Open the affected window completely.
-  Pull the switch to the resistance point and hold.  
 The window closes.



3.  Continue holding the switch pulled to the resistance point. The window opens and closes once or twice after approx. 15 seconds, depending on the vehicle's equipment.
4. Release switch.

## Panoramic glass sunroof

### General information

In the event of a severe accident, the glass sunroof is automatically closed.

### Safety information

#### Warning

Body parts can be jammed when operating the glass sunroof. There is a risk of injury. Make sure that the area of movement of the glass sunroof is clear during opening and closing.

### Overview




### Tilting the glass sunroof



Press back the switch up to or beyond the resistance point and release it. The glass sunroof is raised.

## Opening glass sunroof

### When the glass sunroof is closed




Press the switch back beyond the resistance point and release it twice.

The glass sunroof is opened. Pressing the switch again

stops the motion.

### With the glass sunroof completely raised



– Slide switch back to the resistance point and hold.

The glass sunroof is opened as long as the switch is pressed.

- Press the switch back beyond the resistance point and release it. The glass sunroof is opened. Pressing the switch again stops the motion.

### Comfort position

In some models, the wind noises in the car's interior are lowest when the glass sunroof is not fully open. In these models, the automatic function initially only opens the glass sunroof up to this comfort position.

Pressing the switch again opens the glass sunroof fully.

## Closing glass sunroof

### With the glass sunroof open



– Slide switch forward to the resistance point and hold.

The glass sunroof is closed as long as the switch is

pressed and stops in the raised position.

- Press the switch forward beyond the resistance point and release it.

The glass sunroof is closed and stops in the raised position.

Pressing the switch again stops the motion.

- Press the switch forward beyond the resistance point and release it twice.

The glass sunroof is closed.

Pressing the switch again stops the motion.

### With the glass sunroof completely raised



Press the switch forward beyond the resistance point and release it.

The glass sunroof is closed.

### Opening/closing the sun protection



Use the handle to slide the sun protection into the desired position.

### Jam protection system

#### Principle

The jam protection prevents objects or body parts from becoming jammed between the roof frame and glass sunroof while the glass sunroof is closing.


### General information

If resistance or a blockage is detected while the glass sunroof is being closed, the closing action is interrupted.

The glass sunroof opens slightly.

### Closing without the jam protection system

If there is an external danger, proceed as follows:



1. Push the switch forward past the resistance point and hold it.

The glass sunroof closes with limited jam protection. If the closing force exceeds a specific threshold, closing is interrupted.

2. Push the switch forward again past the resistance point and hold until the glass sunroof closes without jam protection. Make sure that the closing path is clear.

### Initializing after a power interruption

After a power interruption during the opening or closing process, the glass sunroof can only be operated to a limited extent. The system must be initialized in this case. MINI recommends having this work performed by an authorized service center or another qualified service center or repair shop.

# Seats, mirrors and steering wheel

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Sitting safely

An ideal seat position that meets the needs of the occupants can make a vital contribution to relaxed, fatigue-free driving.

In the event of an accident, the correct seat position plays an important role. Follow the information in the following chapters:

- Seats, refer to page 83.
- Seat belts, refer to page 86.
- Head restraints, refer to page 88.
- Airbags, refer to page 141.

## Front seats

### Safety information

#### Warning

Seat setting while driving can lead to unexpected movements of the seat. Vehicle control could be lost. There is a risk of accident. Only adjust the seat on the driver's side when the vehicle is stationary.

#### Warning


With a backrest inclined too far to the rear, the protective effect of the seat belt can no longer be ensured. There is a risk of sliding under the seat belt in an accident. There is a risk of injury or danger to life. Adjust the seat prior to starting the trip. Adjust the backrest so that it is in the most upright position as possible and do not adjust again while driving.

#### Warning

There is a danger of jamming when moving the seats. There is a risk of injury or risk of damage to property. Make sure that the travel path of the seat is clear prior to any adjustment.

## Adjusting seats

### Overview

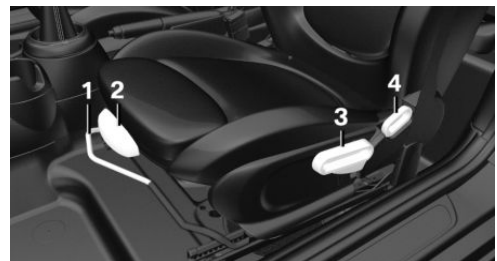

- 1 Longitudinal direction
- 2 Thigh support
- 3 Height
- 4 Backrest tilt

## Longitudinal direction


### Warning

Unexpected movements of the seat while driving may occur if the seat is unlocked. Vehicle control could be lost. There is a risk of accident. After adjusting, move the seat forward or back slightly, making sure the seat engages properly.



Pull the lever and slide the seat in the desired direction.

## Height

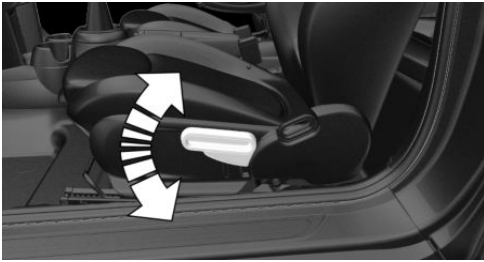

Pull the lever up or press it down as often as needed to reach the desired height.

## Backrest tilt



Pull the lever, and apply your weight to the backrest or lift it off, as necessary.


## Lumbar support

The curvature of the seat backrest can be adjusted in a way that it supports the lumbar region of the spine. The lower back and the spine are supported for upright sitting position.



Turn the wheel in order to increase or decrease the curvature.

## Thigh support

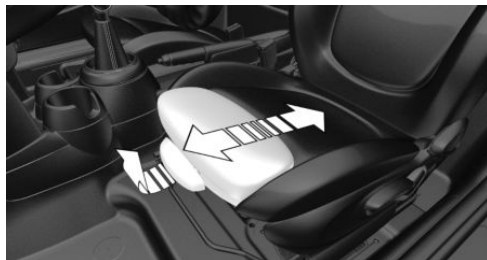

Pull the lever at the front of the seat and adjust the thigh support.

## Entering the rear

### Safety information

#### Warning

There is a danger of jamming when moving the seats. There is a risk of injury or risk of damage to property. Make sure that the travel path of the seat is clear prior to any adjustment.

#### Warning

Unexpected movements of the seat while driving may occur if the seat is unlocked. Vehicle control could be lost. There is a risk of accident. After adjusting, move the seat forward or back slightly, making sure the seat engages properly.

#### Warning

Unexpected movements of the rear seat backrest while driving may occur if the rear seat backrest is unlocked. Vehicle control could be lost. There is a risk of injury. Fold back and lock the backrests before driving. Make sure the backrest en-

gages correctly by slightly moving forward and back.

### Fold the seat backrest forward

1. Pull lever up to the stop.



2. Fold the seat backrest forward.
3. Push the seat forward.

### Original position

The driver's seat features a mechanical memory function for forward/back and backrest adjustment.

1. Push the seat back into the initial position.
2. Fold back the backrest to lock the seat.

If the backrest is folded back when the seat is not yet in the initial position, the seat engages in the current position. In this case, manually adjust longitudinal direction, refer to page [84](#).

## Front seat heating

### Overview



 Seat heating

### Turning on

 Press the button once for each temperature level.

The maximum temperature is reached when three LEDs are illuminated.

If the trip is continued within approx. 15 minutes after a stop, seat heating is switched on automatically with the temperature selected last.

When GREEN Mode is activated, refer to page 224, the heater output is reduced.

### Turning off

 Press and hold the button until the LEDs turn off.

## Seat belts

### General information

The vehicle is fitted with four seat belts to ensure occupant safety. However, the seat belts can only offer protection when adjusted correctly.

Always make sure that seat belts are being worn by all occupants before driving off. Al-

though airbags enhance safety by providing added protection, they do not replace seat belts.

If needed, detach the seat belt in the rear from the belt retainer on the side.

All belt fastening points are designed to achieve the best possible protective effect of the seat belts with proper use of the seat belts and correct seat setting. Follow notes on sitting safely, refer to page 83.

### Safety information

#### Warning

Use of a seat belt to buckle more than one person will potentially defeat the ability of the seat belt to serve its protective function. There is a risk of injury or danger to life. Do not strap in more than one person per single seat belt. Infants and children are not allowed on an occupant's lap, but must be transported and secured in designated child restraint systems.

#### Warning

The protective effect of safety gear, including seat belts, can be limited or lost when seat belts are fastened incorrectly. An incorrectly fastened seat belt can cause additional injuries, for instance in the event of an accident, braking or evasive maneuvers. There is a risk of injury or danger to life. Make sure that all occupants are wearing seat belts correctly.

#### Warning

The protective effect of safety gear, including seat belts, may not be fully functional or fail in the following situations:

- The seat belts or seat belt buckles are damaged, soiled, or changed in any other way.
- Seat belt tensioners or roll-up mechanism were modified.


Seat belts can be imperceptibly damaged in the event of an accident. There is a risk of injury or danger to life. Do not modify seat belts, seat belt buckles, seat belt tensioners, roll-up mechanisms, or belt anchors and keep them clean. After an accident, have the seat belts checked by an authorized service center or another qualified service center or repair shop.

### Correct use of seat belts

- Wear the seat belt tight to your body over your lap and shoulders, without twisting it.
- Wear the seat belt deep on your hips over your lap. The seat belt must not press on your stomach.
- Do not rub the seat belt against sharp edges, or guide it or jam it in across hard or fragile objects.
- Avoid thick clothing.
- Re-tighten the seat belt frequently upward around your upper body area.

### Buckling the seat belt

1. Guide the seat belt slowly over shoulder and hip to put it on.
2. Insert the buckle tongue into the seat belt buckle. The seat belt buckle must engage audibly.

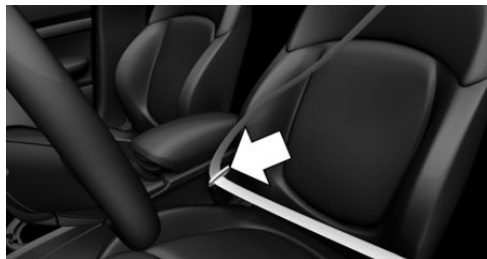

### Unbuckling the seat belt

1. Hold down the seat belt firmly.
2. Press the red button in the belt buckle.
3. Guide the seat belt back into its roll-up mechanism.

### Seat belt reminder for driver's seat and passenger's seat

#### General information

The seat belt reminder is issued when the driver's side seat belt is not buckled.

The seat belt reminder is also active when the front passenger seat belt is not buckled or objects are on the front passenger seat.

The seat belt reminder is also activated when a passenger unbuckles a seat belt during the trip.

#### Display in the instrument cluster



The indicator light illuminates and a signal sounds. Make sure that the seat belts are positioned correctly.

The seat belt reminder can also be activated

if objects are placed on the front passenger seat.

## Seat belt reminder for rear seats



### General information

The seat belt reminder is automatically activated each time the drive-ready state is switched on.

The seat belt reminder is also activated when a passenger unbuckles a rear seat belt during the trip.

### Display in the instrument cluster

The indicator light in the instrument cluster illuminates after switching on the drive-ready state.

Icon	Description
	Green: the seat belt is buckled on the corresponding rear seat.
	Red: the seat belt is not buckled on the corresponding rear seat.

## Front head restraints

### Safety information

#### Warning

Removal or incorrect adjustment of head restraints can cause injuries in the head and neck area. There is a risk of injury.

- Before driving, install the removed head restraints on the occupied seats.
- Adjust the head restraint so its center supports the back of the head at as close to eye level as possible.
- Adjust the distance so that the head restraint is as close as possible to the back of the head. Adjust the distance via the backrest tilt as needed.

#### Warning

Body parts can be jammed when moving the head restraint. There is a risk of injury. Make sure that the area of movement is clear when moving the head restraint.


#### Warning

Objects on the head restraint reduce the protective effect in the head and neck area. There is a risk of injury.

- Do not use seat or head restraint covers.
- Do not hang objects, for instance clothes hangers, directly on the head restraint.
- Only use accessories that have been determined to be safe for attachment to a head restraint.
- Do not use any accessories, for instance pillows, while driving.



## Adjusting the height

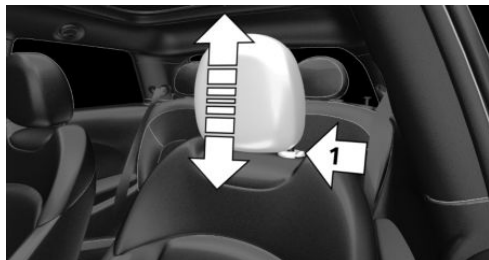


- To lower: press the button, arrow 1, and push the head restraint down.
- To raise: push the head restraint up.

After setting the height, make sure that the head restraint engages correctly.

## Removing

Only remove the head restraint if no one will be sitting in the seat in question.

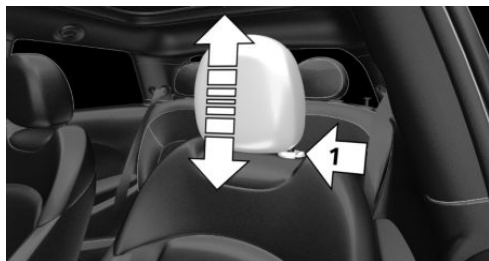

1. If necessary, fold the rear seat backrest forward.
2. Pull head restraint up to the stop.
3. Press the button, arrow 1, and pull the head restraint out completely.

## Installing

Proceed in the reverse order to install the head restraint.

## Rear head restraints

### Safety information

#### Warning

Removal or incorrect adjustment of head restraints can cause injuries in the head and neck area. There is a risk of injury.

- Before driving, install the removed head restraints on the occupied seats.
- Adjust the head restraint so its center supports the back of the head at as close to eye level as possible.
- Adjust the distance so that the head restraint is as close as possible to the back of the head. Adjust the distance via the backrest tilt as needed.

#### Warning


Body parts can be jammed when moving the head restraint. There is a risk of injury. Make sure that the area of movement is clear when moving the head restraint.

#### Warning

Objects on the head restraint reduce the protective effect in the head and neck area. There is a risk of injury.


- Do not use seat or head restraint covers.
- Do not hang objects, for instance clothes hangers, directly on the head restraint.
- Only use accessories that have been determined to be safe for attachment to a head restraint.
- Do not use any accessories, for instance pillows, while driving.

## Adjusting the height

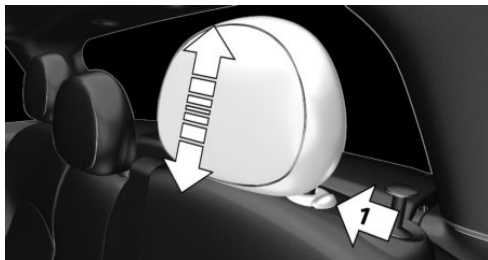

- To lower: press the button, arrow 1, and push the head restraint down.
- To raise: push the head restraint up.

After setting the height, make sure that the head restraint engages correctly.

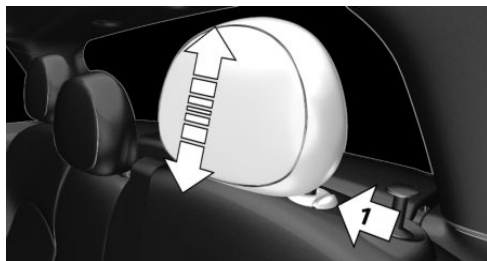

1. Fold down the rear seat backrest, refer to page 214, in question.
2. Pull head restraint up against the resistance.
3. Press the button, arrow 1, and pull the head restraint out completely.

## Fold down



- To fold down: press the button, arrow 1, and press down the head restraint, arrow 2.
- Forward: fold the head restraint toward the front as far as it will go. Make sure that the head restraint engages correctly.

## Removing

Only remove the head restraint if no one will be sitting in the seat in question.

## Installing

Proceed in the reverse order to install the head restraint.

## Mirrors

### Exterior mirrors

#### General information


The front passenger's side exterior mirror is more curved than the driver's side mirror.

#### Safety information

#### Warning

Objects reflected in the mirror are closer than they appear. The distance to the road users behind could be incorrectly estimated, for instance while changing lanes. There is a risk of accident. Estimate the distance to the traffic behind by looking over your shoulder.

## Overview

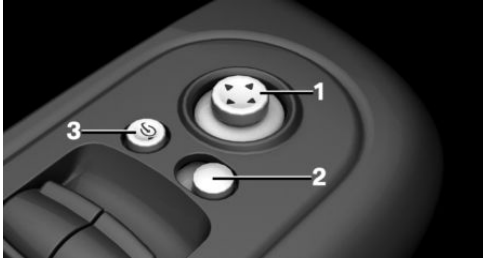

- 1 Adjusting
- 2 Selecting a mirror, Automatic Curb Monitor
- 3 Folding in and out

### Selecting a mirror



To change over to the other mirror:  
Slide the switch.

### Adjusting electrically



Press the button.  
The mirror movement follows the button movement.

### Malfunction

In case of an electrical malfunction, adjust the mirror by pressing the edges of the mirror glass.

### Automatic heating

Both exterior mirrors are automatically heated as needed and when the standby state is switched on.

### Automatic dimming feature


The exterior mirror on the driver's side is automatically dimmed. Photocells in the car's interior mirror, refer to page 92, are used to control this.

## Automatic Curb Monitor

### Principle

If reverse gear is engaged, the mirror glass on the passenger's side is tilted downward. This improves your view of the curb and other low-lying obstacles when parking, for instance.

### Activating


1.  slide the switch to the driver's side mirror position.
2. Engage selector lever position R.

### Deactivating

Slide the switch to the front passenger's side exterior mirror position.


## Interior mirror, manually dimmable

### Flip lever

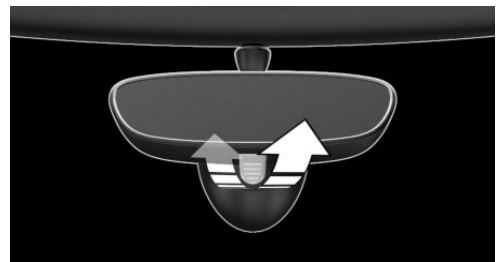

To reduce the blinding glare of the interior mirror, flip the lever forward.


## Turn button

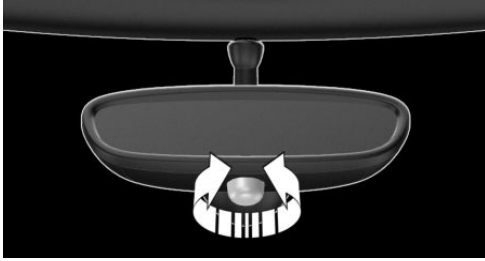

Turn the button to reduce the blinding glare by the interior mirror.

## Interior mirror, automatic dimming feature

### Overview

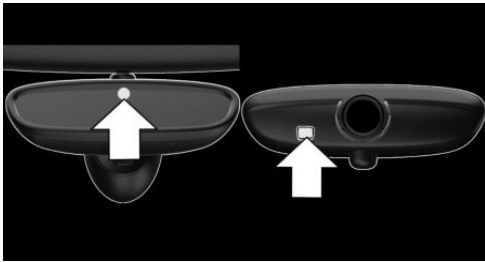

Photocells are used for control:

- In the mirror glass.
- On the rear of the mirror.

### Functional requirements

- Keep the photocells clean.
- Do not cover the area between the interior mirror and the windshield.


## Steering wheel

### Safety information

#### Warning

Steering wheel adjustments while driving can lead to unexpected steering wheel movements. Vehicle control could be lost. There is a risk of accident. Adjust the steering wheel while the vehicle is stationary only.

### Adjusting

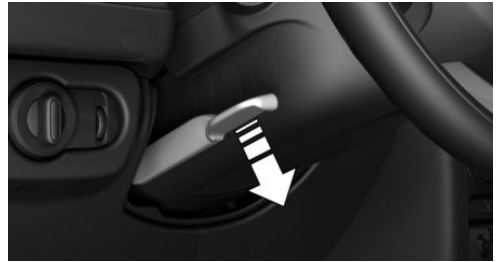

1. Fold the lever down.
2. Move the steering wheel to the preferred height and angle to suit your seat position.
3. Fold the lever back up.

## Steering wheel heating

### Overview





## Steering wheel heating

### Turning on/off



Press the button.

- On: the LED illuminates.
- Off: the LED goes out.

If the trip is resumed within approx. 15 minutes after an intermediate stop, the steering wheel heating turns on automatically if the function was turned on at the completion of the last trip.

# Transporting children safely

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## The right place for children

### Safety information

 **Warning**

Unattended children or animals in the vehicle can cause the vehicle to move and endanger themselves and traffic, for instance due to the following actions:

- Pressing the Start/Stop button.
- Releasing the parking brake.
- Opening and closing the doors or windows.
- Engaging selector lever position N.
- Using vehicle equipment.

There is a risk of accidents or injuries. Do not leave children or animals unattended in the vehicle. Take the vehicle key with you when exiting and lock the vehicle.

 **Warning**

A hot vehicle may result in death to persons, especially children, or animals. There is a risk of injury or danger to life. Do not leave persons, especially children, or animals unattended in the vehicle.

 **Warning**

Exposure to intense sunlight can cause child restraint systems and their components to become very hot. Persons may sustain burn injuries when touching the hot components. There is a risk of injury. Do not expose the child restraint system to direct sunlight or cover where necessary. If necessary, let the child restraint system cool down before transporting a child. Do not leave children unattended in the vehicle.

## Children in the rear seat

### General information

Accident research shows that the safest place for children is in the rear seat.

Children younger than 13 years of age or shorter than 5 ft/150 cm should be transported in the rear seat in suitable child restraint systems designed for the age, weight and size of the child. Children 13 years of age or older must wear a seat belt as soon as a suitable child restraint system can no longer be used due to their age, weight, or size.

## Safety information

### Warning

The seat belt cannot be fastened correctly on children shorter than 5 ft/150 cm without suitable additional child restraint systems. The protective effect of safety gear, including seat belts, can be limited or lost when seat belts are fastened incorrectly. An incorrectly fastened seat belt can cause additional injuries, for instance in the event of an accident, braking or evasive maneuvers. There is a risk of injury or danger to life. Secure children shorter than 5 ft/150 cm using suitable child restraint systems.

## Children on the front passenger seat

### General information

Before using a child restraint system on the front passenger seat, ensure that the front, knee, and side airbags on the passenger's side are deactivated. For automatic deactivation of front passenger airbags, refer to page 143.

### Safety information

#### Warning

Active front passenger airbags can injure a child in a child restraint system when the airbags are deployed. There is a risk of injury. Make sure that the front passenger airbags are deactivated and that the PASSENGER AIRBAG OFF indicator light illuminates.

#### Warning

The stability of the child restraint system is limited or compromised with incorrect seat setting or improper installation of the child seat. There is a risk of injury or danger to life. Make sure that the child restraint system fits securely against the backrest. If possible, adjust the backrest tilt for all affected backrests and correctly adjust the seats. Make sure that seats and backrests are securely engaged or locked. If possible and necessary, adjust the height of the head restraints or remove them.

## Installing child restraint systems

### General information

Pay attention to the specifications of the child restraint system manufacturer when selecting, installing, and using child restraint systems.

In order to facilitate the installation of a back-facing child restraint system in the rear:

Move the front seat as far up as possible before folding down the backrest.

### Safety information

#### Warning

The protective effect of child restraint systems and their fastening systems which have been damaged or exposed to an accident can be limited or lost. A child cannot be properly restrained in the event of an accident, braking or evasive maneuvers. There is a risk of injury or danger to life.

Do not use child restraint systems which have been damaged or exposed to an accident.

If attachment systems have been damaged or strained by an accident, have them checked and replaced by an authorized service center or another qualified service center or repair shop.

### **⚠ Warning**

The stability of the child restraint system is limited or compromised with incorrect seat setting or improper installation of the child seat. There is a risk of injury or danger to life. Make sure that the child restraint system fits securely against the backrest. If possible, adjust the backrest tilt for all affected backrests and correctly adjust the seats. Make sure that seats and backrests are securely engaged or locked. If possible and necessary, adjust the height of the head restraints or remove them.

## **On the rear seats**

In order to facilitate the installation of a back-facing child restraint system:

Move the front seat as far up as possible before folding down the backrest.

## **On the front passenger seat**

### **Deactivating the airbags**

### **⚠ Warning**

Active front passenger airbags can injure a child in a child restraint system when the airbags are deployed. There is a risk of injury. Make sure that the front passenger airbags are deactivated and that the

PASSENGER AIRBAG OFF indicator light illuminates.

Before installing a child restraint system in the front passenger seat, make sure that the front, knee and side airbags on the passenger's side are deactivated.

Deactivate the front passenger airbags automatically, refer to page [143](#).

## **Seat position and height**

After installing a child restraint system, move the front passenger seat as far back as possible and adjust its height to the highest and thus best possible position for the belt and to offer optimal protection in the event of an accident.

If the upper attachment point of the seat belt is located in front of the belt guide of the child restraint seat, move the front passenger seat carefully forward until the best possible belt guide position is reached.

## **Child seat security**



The rear seat belts and the front passenger seat belt can be permanently locked to fasten child restraint systems.



## Locking the seat belt

1. Pull out the belt strap completely.
2. Secure the child restraint system with the seat belt.
3. Allow the belt strap to be pulled in and pull it tight against the child restraint system. The seat belt is disabled.

## Unlocking the seat belt

1. Unbuckle the seat belt buckle.
2. Remove the child restraint system.
3. Allow the belt strap to be pulled in completely.

## LATCH child seat mountings

### General information

LATCH: Lower Anchors and Tether for Children.

Pay attention to the operating and safety information from the child restraint system manufacturer when installing and using LATCH child restraint fixing systems.

### Mounts for the lower LATCH anchors

#### General information

The lower anchors may be used to attach the CRS to the vehicle seat up to a combined child and CRS weight of 65 lbs/ 30 kg when the child is restrained by the internal harnesses.

## Safety information



### Warning

If the lower mountings of the child restraint system are not correctly engaged, the protective effect of the child restraint system is limited. There is a risk of injury or danger to life. Make sure that the lower mountings are correctly engaged and that the child restraint system fits securely against the backrest.

### Warning

The mounts for the lower mountings and attachment points of the child restraint system are intended for attaching child restraint systems only. If other objects are attached, the mounts or attachment points can be damaged. There is a risk of injury or risk of damage to property. Only attach child restraint systems at the corresponding mounts for the lower mountings or attachment points.

## Position

Icon	Meaning
	The corresponding icon shows the mounts for the lower LATCH anchors.
	Seats equipped with lower mountings are marked with a pair (2) of LATCH icons.

## Before installing LATCH child restraint systems

Pull the seat belt away from the area of the child seat mountings.

## Assembly of LATCH child restraint fixing systems

1. Mount child restraint system, see manufacturer's information.
2. Ensure that both LATCH anchors are properly engaged.

## Child restraint systems with tether strap

### Safety information

#### **Warning**

If the upper retaining strap is incorrectly used for the child restraint system, the protective effect is reduced. There is a risk of injury. Ensure that the upper retaining strap is guided to the upper attachment point without twisting and not over sharp edges.

#### **Warning**

If the rear seat backrest is not locked, the protective effect of the child restraint system is limited or nonexistent. In certain situations, for instance braking maneuvers or in case of an accident, the rear seat backrest can fold forward. There is a risk of injury or danger to life. Make sure that the rear seat backrests are locked.

#### **Warning**

The mounts for the lower mountings and attachment points of the child restraint system are intended for attaching child restraint systems only. If other objects are attached, the mounts or attachment points can be damaged. There is a risk of injury or risk of damage to property. Only attach child restraint systems at the correspond-


ing mounts for the lower mountings or attachment points.

### Attachment points



The respective icon shows the attachment point for the upper retaining strap. Seats with an upper top tether are marked with this icon. It can be found on the rear seat backrest or the rear shelf.

### Routing the retaining strap

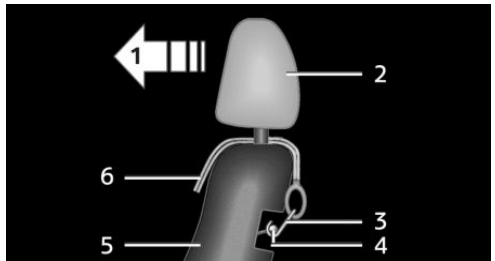

- 1 Driving direction
- 2 Head restraint
- 3 Hook for upper retaining strap
- 4 Attachment point
- 5 Seat backrest
- 6 Upper retaining strap

### Attaching the upper retaining strap to the attachment point

1. Raise the head restraint, if needed.
2. On the rear seat: Guide the upper retaining strap between or along both sides of the supports of the head restraint to the anchor.
3. Attach the hook of the retaining strap to the anchor on the rear seat.
4. Tighten the retaining strap.

# Driving

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Start/Stop button

### Principle



Pressing the Start/Stop button switches standby state on or off.

Drive-ready state is switched on when you depress the brake pedal while pressing the Start/Stop button.

Pressing the Start/Stop button again switches drive-ready state back off and radio-ready state is switched back on.

The drive-ready state cannot be activated as long as the charging cable is connected, refer to page [228](#).

### Radio-ready state

Some electrical components are ready for operation.

The radio-ready state is switched off automatically:

- If the driver's or front passenger door is opened when exiting the vehicle, with

the drive-ready state switched off manually.

- After approx. 8 minutes.
- When the vehicle is locked using the central locking system.
- If the charge state of the batteries is low.

Radio-ready state remains active if, for instance the drive-ready state is automatically switched off for the following reasons:

- Opening or closing the driver's door.
- Unfastening of the driver's seat belt.
- When automatically changing over from low beams to parking lights.

Radio-ready state is also switched back on if the on/off button on the radio is pressed when the vehicle is parked.

If the drive-ready state is switched on: the system automatically switches to radio-ready state when the driver's door is opened and the driver's seat belt is unbuckled if the lights are switched off or the daytime driving lights are switched on.

### Standby state

All electrical components are ready for operation. Odometer and trip odometer are displayed in the instrument cluster.

To preserve the battery, use standby state and activated electrical components only as long as absolutely necessary.

### Turning on standby state

Pressing the Start/Stop button switches standby state on or off.

Standby state is switched off automatically:



- When locking the vehicle, even if the low beams are switched on.
- When opening or closing the driver's door, if the driver's seat belt is unbuckled and the low beams are switched off.
- While the driver's seat belt is unbuckled with driver's door open and low beams off.
- When the batteries' state of charge is low, if the low beams are switched off.
- The low beams switch to parking lights after approx. 15 minutes of no use.
- When the front doors are opened if there is no other person sitting in the front seats.

## Drive-ready state

Activated drive-ready state is the equivalent of a running engine in conventional vehicles. Deactivated drive-ready state is equivalent to switching the engine off.

If drive-ready state is switched on, the vehicle ready to drive and the needle in the instrument cluster is on READY signal, refer to page 100.

All vehicle systems are ready for operation. Most of the indicator/warning lights in the instrument cluster illuminate for a varied length of time.

To save battery power when parking, turn off the drive-ready state and any unnecessary electrical components.

The drive-ready state is switched off automatically if the driver's seat belt is not buckled when the driver's door is opened.

## Safety information

### NOTICE

Selector lever position P is automatically engaged when drive-ready state is switched off. There is a risk of damage to property. Do not switch drive-ready state off in car washes.

## Drive-ready state in detail

### Safety information

### Warning

An unsecured vehicle can begin to move and possibly roll away. There is a risk of accident. Before leaving the vehicle, secure the vehicle against rolling away.

In order to ensure that the vehicle is secured against rolling away, follow the following:

- Set the parking brake.
- On uphill grades or on downhill slopes, turn the front wheels in the direction of the curb.
- On uphill grades or on downhill slopes, also secure the vehicle, for instance with a wheel chock.

### Turning on the drive-ready state

1. Close the driver's door.
2. Depress the brake pedal.
3. Press the Start/Stop button.

Drive-ready state is switched on.

## Display in the instrument cluster



The READY display indicates that the vehicle is ready for driving.

## Driving off

### Functional requirements

Driving is possible when the following prerequisites are met:

- The state of high-voltage battery charge is sufficient.
- The driver's door is closed.
- Charging cable is detached.

### Driving

1. Turn on drive-ready state.
2. Apply the brake and engage the selector lever in position D or R.
3. Release the parking brake.
4. Depress the accelerator pedal to drive.

### State of charge in strong temperature fluctuations

In the case of strong temperature fluctuations and a low state of charge of the high-voltage battery, it may not be possible to start the vehicle again at the beginning of the next trip. Recharge vehicle with a low state of charge in time.

## Selector lever positions



The engaged selector lever position is displayed on the selector lever.

### D Drive

Position for normal driving.

### R reverse

Select only when the vehicle is stationary.

### N is Neutral

The vehicle may be pushed or roll without drivetrain, for instance in car washes, refer to page 102, in selector lever position N.

### P Park

Engage only while the vehicle is stationary and the brake is applied. The drive wheels are blocked.

Selector lever position P is engaged automatically in the following situations:

- If the driver's seat belt is off, the driver's door is open and neither brake nor accelerator pedal are depressed while drive-ready state is switched on and selector lever position D or R is set.
- After turning off drive-ready state via the Start/Stop button, if selector lever position D or R is set.
- With standby state turned off.

Before exiting the vehicle, make sure that selector lever position P is set. Otherwise,

the vehicle may begin to move. Also Set parking brake, refer to page 107.

## Engaging selector lever positions

### General information

- Interlock: the selector lever position P can be exited only when the drive-ready state is activated.
- Gearshift lever lock: with the vehicle stationary, press on the brake pedal before shifting out of P or N; otherwise, the gearshift request will not be executed.
- Gearshift lever lock: before shifting out of P, detach the charging cable from the vehicle; otherwise, the gearshift request will not be executed.

### Engaging selector lever position D, N, R

A selector lever lock prevents the following incorrect operation:

- Unintentional shifting into selector lever position R.
  - Unintentional shifting from selector lever position P into another selector lever position.
1. Press and hold the button to release the selector lever lock.



2. With the driver's seat belt fastened, briefly push the selector lever in the desired direction, past a resistance point, if needed. The selector lever automati-

cally returns to the center position when released.



### Engaging selector lever position P



Press button P.

## Rolling or pushing the vehicle

### General information

In some situations, the vehicle is supposed to roll without its own power for a short distance, for instance in a car wash or to be pushed.

### Engaging selector lever position N

#### ⚠ NOTICE

Selector lever position P is automatically engaged when standby state is switched off. The wheels are blocked. There is a risk of damage to property. Do not switch off standby if the vehicle is meant to coast, e.g., in a car wash.

1. Switch on drive-ready state while pressing on the brake pedal.
2. If necessary, release the parking brake.
3. Depress the brake pedal.
4. Engage selector lever position N.
5. Switch off drive-ready state.

In this way, standby state remains switched on, and a Check Control message is displayed.

The vehicle can roll.

Irrespective of standby state, the selector lever position P is automatically engaged after approx. 15 minutes.

If there is a malfunction, you may not be able to change the selector lever position.

Electronically unlock the transmission lock, if needed.

## Electronic unlocking of the transmission lock

### General information

Unlock the transmission lock electronically, e.g., to maneuver the vehicle out of a hazardous area in the event of a malfunction.

Before unlocking the transmission lock, set the parking brake to prevent the vehicle from rolling away.

### Engaging selector lever position N

1. Hold the Start/Stop button pressed.
2. Depress the brake pedal.
3. Press and hold the selector lever in position N.

An appropriate Check Control message is displayed.

4. Press the selector lever into position N again within approx. 2 seconds.

Position N is indicated on the selector lever.

5. Release Start/Stop button and brake.
6. Maneuver the vehicle from the hazardous area and secure it against rolling away.

## Turning off drive-ready state

Park the vehicle. Noises from the electrical system such as for cooling the high-voltage system might still be audible.

After stopping the vehicle:

1. Apply brake and engage the selector lever in position P.
2. Set the parking brake.
3. Press the Start/Stop button.

The READY indicator goes out and a signal tone sounds.

When leaving the vehicle stationary for longer periods, follow the instructions in the chapter Service life of high-voltage battery, refer to page 238.

## Driving in detail: eDRIVE

### Safety information

#### DANGER

The braking effect of the electric motor can be stronger than for a vehicle with combustion engine. Abrupt braking and slow-down may confuse other road users. There is a risk of accident. Carefully release the accelerator pedal. Adjust driving style to traffic conditions. Watch surrounding traffic closely and actively intervene where appropriate.


**Warning**

When driving in electric mode, pedestrians and other road users might pay less attention to the vehicle due to the lack of engine noise. There is a risk of accident. Adjust driving style to traffic conditions. Watch surrounding traffic closely and actively intervene where appropriate.

**Warning**

Without energy recovery, the braking effect of the electric motor is unavailable. The vehicle could roll further than anticipated. There is a risk of accident. Adjust driving style to traffic conditions. Watch surrounding traffic closely and actively intervene where appropriate.

**Accelerator pedal positions**

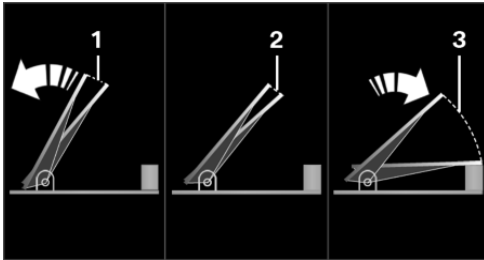

- 1 Deceleration
- 2 Coasting
- 3 Acceleration or constant speed: ePOWER

**Deceleration**

Releasing the accelerator pedal causes deceleration similar to cautious braking. Additionally, the brake lights will come on without actuating the brake pedal.

The degree of the deceleration depends on the energy recovery, refer to page 105, setting.

During the deceleration, energy is recovered and the high-voltage battery is charged.

**Energy recovery: CHARGE**

The high-voltage battery is recharged in part through energy recovery. The electric motor acts as an alternator when decelerating and converts the kinetic energy into electrical energy.

Energy can be recovered if the following conditions are met:

- The vehicle is moving.
- Speed higher than approx. 12 mph/20 km/h.
- Selector lever position D or R is set.
- Accelerator pedal is not actuated or only pressed down one third of the pedal travel.

Energy cannot be recovered in the following situations:

- Selector lever position N is engaged.
- While the driving stability control systems, e.g. Dynamic Traction Control, are active and adjusting the vehicle, even when this is not indicated by an indicator light.
- The high-voltage battery is fully charged.
- When temperature of the high-voltage battery is very low or very high.

In winter the energy recovery may be temporarily unavailable after startup.

**Exemplary driving situations**

If a deceleration operation is foreseeable while driving, this can be used for energy recovery.



The following exemplary driving situations may be suitable:

- Decelerating downhill.
- Deceleration before a red traffic light.

Avoid late or strong braking. Instead, decelerate the vehicle using energy recovery.

## Set energy recovery

### Principle

The energy recovery is adjustable.

- High energy recovery: the vehicle decelerates faster, more energy is returned to the high-voltage battery.
- Low energy recovery: the vehicle decelerates more slowly, less energy is returned to the high-voltage battery.

### Overview



Energy recovery

### Adjusting



Press the button up or down.

- LED off: high energy recovery.
- LED illuminated: low energy recovery.

The setting is briefly displayed in the instrument cluster.

## Coasting

The electric drive makes it possible to roll without consuming energy. This driving condition is referred to as coasting.

Proactive driving reduces energy consumption and increases the range.

With vehicle rolling, no energy is recovered.

### Exemplary driving situations

If a distance can be traveled without anticipated need for braking, it is advantageous to roll.

The following exemplary driving situations may be suitable:

- Rolling on a straight downhill route without obstacles.
- Coasting on a distance without obstacles.

Avoid late or strong braking.

## Acoustic pedestrian protection

The system generates a continuous driving noise during electric driving up to approx. 20 mph/30 km/h.

A speaker system broadcasts the noise to the environment.

As a result, other road users, for instance pedestrians or cyclists, can better perceive the vehicle.

## Heavily discharged high-voltage battery

If the high-voltage battery is heavily discharged while driving, the drive power and some comfort features are reduced incrementally in order to extend the range.

## Heated high-voltage battery

### With a stationary vehicle

In isolated cases, when the vehicle is stationary, it is possible for the high-voltage battery to overheat, for instance at extreme outside temperatures and in direct sunlight. Drive-ready state cannot be turned on if the high-voltage battery is overheated.

A Check Control message is displayed.

Another message will indicate when drive-ready state is available again.

### While driving

If the high-voltage battery overheats while driving, the drive power is reduced incrementally in order to cool down the high-voltage battery. The ePOWER power gauge in the instrument cluster decreases. If the temperature increases further, park the vehicle until the high-voltage battery has cooled down. If the power gauge falls to 0, the drive-ready state is switched off and the vehicle comes to a stop.

## Parking brake, electric

### Principle

The parking brake is used to prevent the vehicle from rolling when it is parked.

### Safety information

#### Warning

An unsecured vehicle can begin to move and possibly roll away. There is a risk of accident. Before leaving the vehicle, secure the vehicle against rolling away.

In order to ensure that the vehicle is secured against rolling away, follow the following:

- Set the parking brake.
- On uphill grades or on downhill slopes, turn the front wheels in the direction of the curb.
- On uphill grades or on downhill slopes, also secure the vehicle, for instance with a wheel chock.

#### Warning

Unattended children or animals in the vehicle can cause the vehicle to move and endanger themselves and traffic, for instance due to the following actions:

- Pressing the Start/Stop button.
- Releasing the parking brake.
- Opening and closing the doors or windows.
- Engaging selector lever position N.
- Using vehicle equipment.

There is a risk of accidents or injuries. Do not leave children or animals unattended in the vehicle. Take the vehicle key with you when exiting and lock the vehicle.

### Overview



 Parking brake

## Setting the parking brake

### With a stationary vehicle



Pull the switch.

The LED illuminates.



The indicator light illuminates red.  
The parking brake is set.

Depending on the stopping situation, the parking brake is engaged automatically.

In some parking situations, the parking brake is automatically engaged, when selector lever position P is engaged. In these cases, the parking brake is released automatically when you leave the selector lever position P.

### While driving

To use as emergency brake while driving:



Pull the switch and hold it. The vehicle brakes hard while the switch is being pulled.



The indicator lights illuminate red, a signal sounds, and the brake lights illuminate.

A Check Control message is displayed.

If the vehicle is decelerated to a complete stop, the parking brake is engaged.

## Releasing the parking brake

### Releasing the parking brake manually

1. Turn on standby state.



2. Press the switch while stepping on the brake pedal or with selector lever position P.

The LED and the indicator light go out.

The parking brake is released.

### Releasing the parking brake automatically

For automatic release, step on the accelerator pedal.

The LED and the indicator light go out.

The parking brake is automatically released when you step on the accelerator pedal when the following prerequisites are met:

- Standby state switched on.
- Gear position engaged.
- Driver buckled in and doors closed.

### Malfunction

If the parking brake fails or in case of a fault, secure the vehicle against rolling away before exiting.

A Check Control message is displayed.

Secure the vehicle against rolling away, for instance with a wheel chock, after getting out of the vehicle.

### After a power interruption

#### Commissioning

1. Turn on standby state.



2. Press the switch while stepping on the brake pedal or with selector lever position P.

Commissioning may take a few seconds. Some mechanical sounds associated with this process are normal.



The indicator light in the instrument cluster turns off as soon as the parking brake is ready for operation again.

## Hold function

### Principle

The system holds the vehicle automatically when gear is engaged. This prevents rolling against the driving direction.

In selector lever position D, the vehicle cannot roll backwards. In selector lever position R, it cannot roll forward. The brake pedal does not have to be pressed.

### Reducing energy consumption


To reduce energy consumption when the hold function is activated, activate the parking brake or engage the selector lever in position P when the vehicle is at standstill for long periods of time.

The hold function can be affected by the vehicle's load and the gradient. If needed, a Check Control message will appear and selector lever position P will be selected automatically.

## Turn signal, high beams, headlight flasher

### Turn signal

#### Flashing

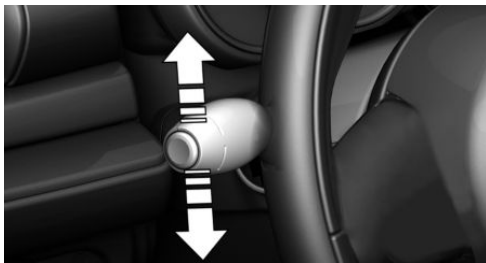

Press the lever past the resistance point. Canada: the lever returns into its initial position after actuation. To switch off man-


ually, slightly tap the lever to the resistance point.

### Triple turn signal activation

Lightly tap the lever up or down.

The triple turn signal duration can be adjusted.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Lighting"
4. "Exterior lighting"
5. "One-touch turn signal"
6. Select the desired setting.

Settings are stored for the profile currently used.

### Brief flashing

Press the lever to the resistance point and hold it there for as long as you want the turn signal to flash.

### Malfunction

Unusually rapid flashing of the indicator light indicates that a turn signal bulb has failed.

### High beams, headlight flasher

Press the lever forward or pull it backward.



- High beams on, arrow 1.

The high beams illuminate when the low beams are switched on.

- High beams off/headlight flasher, arrow 2.

## Window wiper system

### Safety information

#### Warning

If the wipers start moving in the folded away state, body parts can be jammed or damage may occur to parts of the vehicle. There is a risk of injury or risk of damage to property. Make sure that the vehicle is switched off when the wipers are in the folded-away state and the wipers are folded in when switching on.

#### NOTICE

The wiper blades can wear out or become damaged prematurely when wiping on a dry window for a longer period of time. The wiper motor can overheat. There is a risk of damage to property. Do not use the wipers when the window is dry.

#### NOTICE

If the wipers are frozen to the windshield, the wiper blades can be torn off and the wiper motor can overheat when switching on. There is a risk of damage to property. Defrost the windshield prior to switching the wipers on.

### Turning on



Press the lever up until the desired position is reached.

- Resting position of the wipers, position 0.
- Intermittent operation or rain sensor, position 1.
- Normal wiper speed, position 2.
- Fast wiper speed, position 3.

When the journey is interrupted with the window wiper system switched on: when travel continues, the wipers resume at their previous level.

### Turning off and flick wipe



Press the lever down.

- Switching off: press the lever down until it reaches its basic setting.
- Flick wipe: press the lever down from the basic setting.

The lever automatically returns to its basic setting when released.

## Intermittent operation or rain sensor

### Principle

The rain sensor automatically controls the wiper operation depending on the intensity of the rainfall.

### General information

The sensor is located on the windshield, directly in front of the interior mirror. Without the rain sensor, the interval of the wiper operation is predefined.

### Safety information

#### NOTICE

If the rain sensor is activated, the wipers can accidentally start moving in car washes. There is a risk of damage to property. Deactivate the rain sensor in car washes.

### Activating



Press the lever up once from its basic setting, arrow 1.

Wiping operation is started.

The LED in the wiper lever is illuminated.

In frosty conditions, wiping operation may not start.

### Deactivating

Press the lever back into the basic setting.

### Setting the interval period or sensitivity of the rain sensor



Turn the thumbwheel.

With deactivated rain sensor: set the interval period.

With activated rain sensor: set the rain sensor sensitivity.

Up: short interval or high sensitivity of the rain sensor.

Down: long interval or low sensitivity of the rain sensor.

### Windshield washer system

#### Safety information

#### Warning

The washer fluid can freeze onto the window at low temperatures and obstruct the view. There is a risk of accident. Only use the washer systems if the washer fluid cannot freeze. Use washer fluid with anti-freeze, if needed.

**⚠ NOTICE**

When the washer fluid reservoir is empty, the washer pump cannot work as intended. There is a risk of damage to property. Do not use the washer system when the washer fluid reservoir is empty.

**Cleaning the windshield**

Pull the lever.

The washer fluid is sprayed on the windshield, and the wipers are turned on briefly.

**Windshield washer nozzles**

The windshield washer nozzles are automatically heated while standby state is switched on.

**Rear wiper****Switching on the rear wiper**

Turn the outer switch upward.

- Resting position of the wiper, position 0.
- Intermittent operation, arrow 1. When reverse gear is engaged, the system switches to continuous operation.

**Clean the rear window**

Turn the outer switch in the desired direction.

- In resting position: turn the switch downward, arrow 3. The switch automatically returns to its idle position when released.
- In intermittent operation: turn the switch further, arrow 2. The switch automatically returns to its interval position when released.

The function is deactivated if the washer fluid reservoir fill level is low.

**Fold-out position of the wipers****Principle**

The fold-out position enables the wipers to be folded out from the windshield.

**General information**

Helpful when changing the wiper blades or under frosty conditions, for instance.

**Safety information****⚠ Warning**

If the wipers start moving in the folded away state, body parts can be jammed or damage may occur to parts of the vehicle. There is a risk of injury or risk of damage to property. Make sure that the vehicle is switched off when the wipers are in the folded-away state and the wipers are folded in when switching on.

**NOTICE**


If the wipers are frozen to the windshield, the wiper blades can be torn off and the wiper motor can overheat when switching on. There is a risk of damage to property. Defrost the windshield prior to switching the wipers on.

**Folding out the wipers**

1. Switch standby state on and off again.
2. Press and hold the wiper lever down until the wipers stop in a nearly vertical position.



3. Fold the wipers all the way out from the windshield.

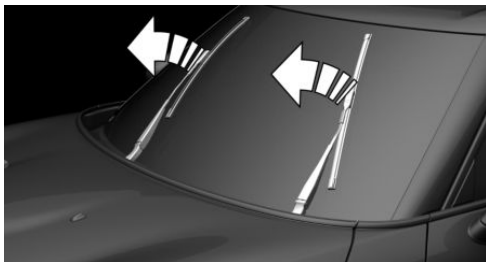

**Folding in the wipers**

After the wipers are folded back down, the window wiper system must be reactivated.

1. Fold the wipers back in onto the windshield.
2. Turn on standby state.
3. Push wiper lever down. Wipers return to their resting position and are ready again for operation.

**Canada: window wiper system**

**Safety information**

**Warning**

If the wipers start moving in the folded away state, body parts can be jammed or damage may occur to parts of the vehicle. There is a risk of injury or risk of damage to property. Make sure that the vehicle is switched off when the wipers are in the folded-away state and the wipers are folded in when switching on.

**NOTICE**

The wiper blades can wear out or become damaged prematurely when wiping on a dry window for a longer period of time. The wiper motor can overheat. There is a risk of damage to property. Do not use the wipers when the window is dry.

**NOTICE**

If the wipers are frozen to the windshield, the wiper blades can be torn off and the wiper motor can overheat when switching on. There is a risk of damage to property.



Defrost the windshield prior to switching the wipers on.

## Turning on



Tap up the lever or press it past the resistance point.

- Normal wiper speed: tap up once.
- Fast wiper speed: tap up twice or tap once beyond the resistance point.

The lever automatically returns to its basic setting when released.

## Turning off and flick wipe



Press the lever down.

- To switch off from fast wiper speed: press down twice.
- To switch off from normal wiper speed: press down once.
- Flick wipe: press down once.

The lever automatically returns to its basic setting when released.

## Intermittent operation or rain sensor

### Principle

The rain sensor automatically controls the wiper operation depending on the intensity of the rainfall.

### General information

The sensor is located on the windshield, directly in front of the interior mirror. Without the rain sensor, the interval of the wiper operation is predefined.

### Safety information

#### NOTICE

If the rain sensor is activated, the wipers can accidentally start moving in car washes. There is a risk of damage to property. Deactivate the rain sensor in car washes.

## Activating/deactivating



Press the button on the wiper lever.

Wiping operation is started.

If the vehicle is equipped with a rain sensor: the LED in the wiper lever is illuminated.

In frosty conditions, wiping operation may not start.

If a journey is interrupted with the rain sensor switched on: if the trip is resumed

within approx. 15 minutes, the rain sensor is automatically activated again.

### Setting the interval period or sensitivity of the rain sensor



Turn the thumbwheel.

With deactivated rain sensor: set the interval period.

With activated rain sensor: set the rain sensor sensitivity.

Up: short interval or high sensitivity of the rain sensor.

Down: long interval or low sensitivity of the rain sensor.

### Windshield washer system

#### Safety information

**Warning**

The washer fluid can freeze onto the windshield at low temperatures and obstruct the view. There is a risk of accident. Only use the washer systems if the washer fluid cannot freeze. Use washer fluid with anti-freeze, if needed.

**NOTICE**

When the washer fluid reservoir is empty, the washer pump cannot work as intended. There is a risk of damage to property. Do not use the washer system when the washer fluid reservoir is empty.

### Cleaning the windshield



Pull the lever.

The washer fluid is sprayed on the windshield, and the wipers are turned on briefly.

### Windshield washer nozzles

The windshield washer nozzles are automatically heated while standby state is switched on.

### Rear wiper

#### Switching on the rear wiper



Turn the outer switch upward.

- Resting position of the wiper, position 0.
- Intermittent operation, arrow 1. When reverse gear is engaged, the system switches to continuous operation.

### Clean the rear window

Turn the outer switch in the desired direction.

- In resting position: turn the switch downward, arrow 3. The switch automatically returns to its idle position when released.
- In intermittent operation: turn the switch further, arrow 2. The switch automatically returns to its interval position when released.

The function is deactivated if the washer fluid reservoir fill level is low.

### Fold-out position of the wipers

#### Principle

The fold-out position enables the wipers to be folded out from the windshield.

#### General information

Helpful when changing the wiper blades or under frosty conditions, for instance.

#### Safety information

##### Warning

If the wipers start moving in the folded away state, body parts can be jammed or damage may occur to parts of the vehicle. There is a risk of injury or risk of damage to property. Make sure that the vehicle is switched off when the wipers are in the folded-away state and the wipers are folded in when switching on.

##### NOTICE


If the wipers are frozen to the windshield, the wiper blades can be torn off and the wiper motor can overheat when switching on. There is a risk of damage to property. Defrost the windshield prior to switching the wipers on.

### Folding out the wipers

1. Switch the ignition on and off again.
2. Press the wiper lever up past the point of resistance and hold it for approx. 3 seconds, until the wipers remain in a nearly vertical position.



3. Fold the wipers all the way out from the windshield.

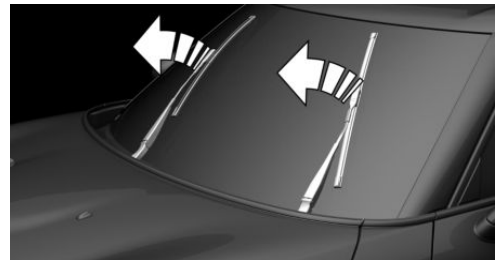

### Folding in the wipers

After the wipers are folded back down, the window wiper system must be reactivated.

1. Fold the wipers back in onto the windshield.
2. Turn on standby state.
3. Push wiper lever down. Wipers return to their resting position and are ready again for operation.

## Washer fluid

### General information

All windshield washer jets are supplied from one tank.

Use a mixture of tap water and windshield washer concentrate. If desired, a windshield washer concentrate containing antifreeze can be used.

Recommended minimum fill quantity:  
0.2 US gal/1 liter.

### Safety information

**Warning**

Some types of antifreeze can contain harmful substances and are flammable. There is a risk of fire and an injury hazard. Follow the instructions on the containers. Keep antifreeze away from ignition sources. Do not refill operating materials into different bottles. Store operating materials out of reach of children.

United States: the washer fluid mixture ratio is regulated by the U.S. EPA and many individual states; do not exceed the allowable washer fluid dilution ratio limits that apply. Follow the usage instructions on the washer fluid container.

Use of BMW's Windshield Washer Concentrate or the equivalent is recommended.

**NOTICE**

Silicon-containing additives in the washer fluid for the water-repelling effect on the windows can lead to damage to the car wash. There is a risk of damage to property. Do not add silicon-containing additives to the washer fluid.

**NOTICE**

Mixing different windshield washer fluid concentrates or antifreeze can damage the washer system. There is a risk of damage to property. Do not mix different windshield washer fluid concentrates or antifreeze. Follow the information and mixture ratios provided on the containers.

### Overview



The washer fluid reservoir is located in the engine compartment.

### Malfunction

The use of undiluted windshield washer fluid concentrate or alcohol-based antifreeze can lead to incorrect readings at temperatures below +5 °F/-15 °C.

# Displays

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily avail-

able in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.


## Instrument cluster

### Overview



- |  |   |
|--|---|
| 1 Power gauge <a href="#">119</a>              | Charging screen <a href="#">118</a>                               |
| 2 Display/reset kilometers <a href="#">124</a> | 4 Vehicle speed   |
| 3 Electronic displays <a href="#">118</a>      | 5 Indicator/warning lights  |
|  | 6 High-voltage battery charge state indicator <a href="#">119</a> |


## Electronic displays

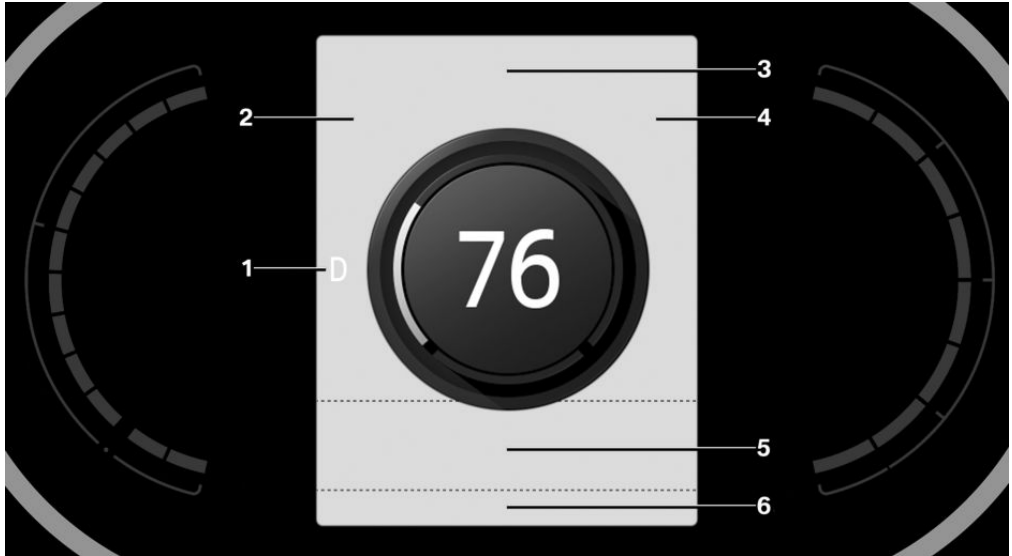

- 1 Selector lever position [100](#)
- 2 Time [125](#)  
MINI Driving Modes switch status [168](#)
- 3 Driver assistance systems
- 4 Outside temperature [124](#)
- Range [125](#)
- 5 Messages, for instance Check Control Selection lists [128](#)  
Navigation instructions
- 6 Total kilometers/trip odometer [124](#)  
On-board computer [128](#)

## Charging screen

### Overview

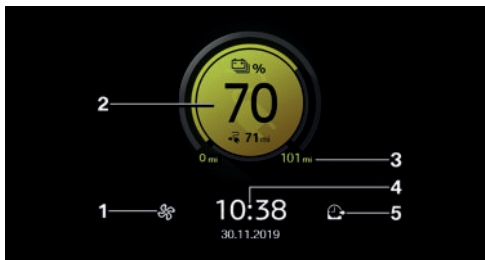

- 1 Pre-conditioning [237](#)
- 2 Charging status [236](#)
- Current range
- 3 Calculated range with fully charged the high-voltage battery
- 4 End of charging time [236](#)  
Set departure time [237](#)
- 5 Departure time is set [237](#)

## Displays of the eDRIVE system

### Displays in the instrument cluster

#### Principle

The display depends on the system's operating condition. The following functions of the eDRIVE system are shown in the instrument cluster

- High-voltage battery charge state indicator.
- Power gauge.
- Drive-ready state: READY.


#### High-voltage battery charge state indicator

##### Safety information

#### Warning

Even when it is indicated that the high-voltage battery is discharged, the high-voltage system is always still under high voltage. There is a risk of fire or a risk of injury. Do not touch or change live parts, e.g., orange high-voltage cables, even when the batteries are discharged.

#### Display



The fill level bars indicate the available charge state of the high-voltage battery when standby state and drive-ready state are switched on.

#### Power gauge

##### Principle

A needle indicates the power output in a scale.

The efficient range for electric driving ePOWER and energy recovery CHARGE is shown in yellow.

#### General information

Depending on the available power, the efficient range for electric driving ePOWER is adjusted automatically.

The efficient range for energy recovery depends on the settings via the button for the energy recovery. Set energy recovery, refer to page 105.

The available power may be reduced due to the following factors:

- Heavily discharged high-voltage battery.
- Extreme outside temperatures.
- When driving on steep inclines, with a sporty driving style or in other high-power driving conditions.

Optimizing the driving style, refer to page 223.

#### Display



Needle in the CHARGE range, arrow 1: display for energy recovery by coasting or when decelerating:

- Both LEDs are illuminated yellow: high energy recovery.
- One LED is illuminated yellow: low energy recovery.

Needle in the ePOWER range, arrow 2: efficient acceleration.

## Drive-ready state: READY



The READY display indicates that the vehicle is ready for driving. Drive-ready state in detail, refer to page 100.

## Indications on the control display

### Energy flow of the eDRIVE system

#### General information

The display shows the eDRIVE system while driving or charging the vehicle:

- Yellow: electrical energy.
- Arrow: direction of the energy flow.
- The operating states, such as eDRIVE, are displayed.

#### Displaying the energy flow

Via the Central Information Display (CID):

1. "My MINI"
2. "Technology in action"
3. "eDRIVE"

### Auxiliary users

#### General information

The following information is displayed:

- If necessary, information about settings for energy recovery.
- Range potential when switching off individual auxiliary users.
- Current range.

#### Display auxiliary users

Via the Central Information Display (CID):

1. "My MINI"
2. "Technology in action"
3. "eDRIVE"

## Check Control

### Principle

The Check Control system monitors functions in the vehicle and notifies you of faults in the monitored systems.

### General information

A Check Control message is displayed as a combination of indicator or warning lights and text messages in the instrument cluster and in the Head-up display.

In addition, an acoustic signal may be output and a text message may appear on the control display.

### Indicator/warning lights

#### General information

The indicator/warning lights can illuminate in a variety of combinations and colors.

Several of the lights are checked for proper functioning and illuminate temporarily when drive-ready state is established.

### Red lights

#### Seat belt reminder



Indicator light flashes or is illuminated: seat belt on the driver or passenger's side is not buckled. The seat belt reminder can also be activated if objects are placed on the front passenger seat. Make sure that the seat belts are positioned correctly.

#### Seat belt reminder for rear seats



The seat belt is not buckled on the corresponding rear seat.



## Airbag system



Warning light illuminates briefly: Indicates the operational readiness of the entire airbag system and seat belt tensioners when standby is switched on.

Warning light illuminates continuously: There is a malfunction. Have the vehicle checked immediately by an authorized service center or another qualified service center or repair shop.

Operational readiness of airbag system, refer to page [143](#).

## Parking brake, electric



The parking brake is set. For releasing the parking brake, refer to page [107](#).

## Brake system



Brake pads are worn or there is a fault in the brake system.



The braking assistance may not be operational. A higher pedal force may be required for braking.

Have the vehicle checked immediately by an authorized service center or another qualified service center or repair shop.

## Forward Collision Warning



Warning light illuminates: Risk of collision, e.g., with a vehicle, is detected. Increased awareness is required.

Warning light flashes: Risk of imminent collision with a vehicle is detected. Intervene immediately by braking or make an evasive maneuver.

## Pedestrian Warning



Warning light flashes and acoustic signal sounds: Collision with a person is imminent. Intervene immediately by braking or make an evasive maneuver.

## Yellow lights

### Antilock Braking System



The system may not be operational. The Antilock Braking System system is not available.



The ability to steer may be restricted during full braking.

Have checked immediately by an authorized service center or another qualified service center or repair shop.

Antilock Braking System, refer to page [166](#).

### Dynamic Stability Control



Warning light flashes: Dynamic Stability Control is regulating the drive and brake power. The vehicle is stabilized. Reduce speed and modify your driving style to the driving circumstances.

Warning light illuminates: Dynamic Stability Control has failed.

Have the vehicle checked by an authorized service center or another qualified service center or repair shop.

Dynamic Stability Control, refer to page [167](#).

### The Dynamic Stability Control deactivated or the Dynamic Traction Control activated



The Dynamic Stability Control is deactivated or the Dynamic Traction Control is activated.

Dynamic Stability Control, refer to page 167, and Dynamic Traction Control, refer to page 168.

### Flat tire monitor



Warning light illuminates: Flat Tire Monitor is indicating a flat tire or tire pressure loss.

Reduce your speed and stop cautiously. Avoid sudden braking and steering maneuvers.

Flat tire monitor, refer to page 150.

### Tire pressure monitor



Warning light illuminates: Tire Pressure Monitor is indicating a flat tire or tire pressure loss. Follow the information in the Check Control message.

Warning light flashes then illuminates continuously: Flat tires or tire pressure losses cannot be detected.

- Fault caused by systems or devices with the same radio frequency: after leaving the area of the interference, the system automatically becomes active again.
- The Tire Pressure Monitor could not complete the reset: reset the system again.
- A wheel without wheel electronics is mounted: have it checked by an authorized service center or another qualified service center or repair shop as needed.
- Malfunction: have the vehicle checked by an authorized service center or another qualified service center or repair shop.

Tire pressure monitor, refer to page 145.

### Steering system



Steering system may be faulty.

Have the vehicle checked by an authorized service center or another qualified service center or repair shop.

### Acoustic pedestrian protection malfunction



Acoustic pedestrian protection has malfunctioned. Increased caution when maneuvering.

If malfunctioning repeatedly, have the vehicle checked by an authorized service center or another qualified service center or repair shop.

### Green lights

#### Seat belt reminder for rear seats



Green: the seat belt is buckled on the corresponding rear seat.

#### Turn signal



Turn signal switched on.

Unusually rapid flashing of the indicator light indicates that a turn signal bulb has failed.

Turn signal, refer to page 108.

#### Parking lights, headlights



Parking lights or headlights are switched on.

Parking lights/low beams, headlight control, refer to page 135.

#### Bad weather light



Bad weather light is switched on.

Bad weather light, refer to page 138.

## Automatic High Beam Assistant



Automatic High Beam Assistant is switched on.

High beams are switched on and off automatically depending on the traffic situation.

Automatic High Beam Assistant, refer to page [137](#).

## Cruise Control



The system is switched on. It maintains the speed that was predefined using the control elements on the steering wheel.

## Manual Speed Limiter



The indicator light illuminates: the system is switched on.

The indicator light flashes: the set speed limit has been exceeded. If this happens, a signal sounds.

Reduce speed or deactivate system.

## Instrument cluster with enhanced features: Lane Departure Warning



The indicator light illuminates: the system is activated. At least one lane marking was detected and warnings can be issued.

Lane departure warning, refer to page [160](#).

## Blue lights


### High beams



High beams are switched on.

High beams, refer to page [108](#).

## Hiding Check Control messages

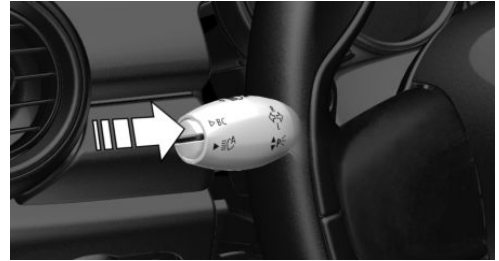

Press the button on the turn signal lever.

## Continuous display

Some Check Control messages are displayed continuously and are not cleared until the fault is eliminated. If several faults occur at once, the messages are displayed consecutively.



The messages can be hidden for approx. 8 seconds. After this time, they are displayed again automatically.

## Temporary display

Some Check Control messages are hidden automatically after approx. 20 seconds. The Check Control messages are stored and can be displayed again later.

## Displaying stored Check Control messages

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle status"
3. Tilt the Controller to the left.
4.  "Check Control"
5. Select the desired text message.

## Display

### Check Control



At least one Check Control message is displayed or stored.

### Text messages

Text messages in combination with an icon in the instrument cluster explain a Check Control message and the meaning of the indicator/warning lights.



### Supplementary text messages

Additional information, such as on the cause of an error or the required action, can be called up via Check Control.

With urgent messages the added text will be automatically displayed on the control display.

Depending on the Check Control message, further help can be selected.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle status"
3. Tilt the Controller to the left.
4.  "Check Control"
5. Select the desired text message.
6. Select the desired setting.

### Messages after trip completion

Certain messages displayed while driving are displayed again after standby state is switched off.

## Odometer and trip odometer

### Principle

The total kilometers driven and the kilometers driven since the last reset are displayed in the instrument cluster.

### Reset trip distance



Press the button.

- The odometer is displayed when the standby state is switched off.
- When standby state is switched on, the trip odometer is reset.

## Outside temperature

### General information

If the indicator drops to +37 °F/+3 °C, a signal sounds.

A Check Control message is displayed.


There is an increased risk of ice on roads.

### Safety information

#### Warning


Even at temperatures above +37 °F/+3 °C there is a risk of icy roads, for instance on bridges or shady sections of the road. There is a risk of accident. Modify your driving style to the weather conditions at low temperatures.

## Display



The outside temperature is displayed in the instrument cluster.


## Time



The time is displayed in the instrument cluster.

Set the time on the Central Information Display (CID), refer to page 47.

## Date



The date is displayed in the instrument cluster.

Set the date on the Central Information Display (CID), refer to page 47.

## Range

### General information

Always make sure that the range is sufficient for the planned trip. The range is dynamic and can abruptly change.

The range can be abruptly reduced or increased based on the following factors:


- Driving style.
- Traffic conditions.
- Program changes via the MINI Driving Modes switch.
- Climate and terrain conditions.
- Automatic climate control settings.

- After determination of a route through the navigation system depending on the route profile, route distance and selected speed.
- When exiting a route or recalculating a route.

Further information about the topic Increasing the range, refer to page 222.

Check Control messages indicate a limited range.

### Display



The expected range for the energy stored in the high-voltage battery is continuously displayed in the instrument cluster.

### Heavily discharged high-voltage battery



The high-voltage battery is heavily discharged. The drive power will be reduced. Heating and climate control functions will be deactivated. In this state, the exact range can

no longer be calculated. A short range may still be available depending on the ambient conditions.

Re-establishing the drive-ready state can help increase the range slightly, for instance to remove the vehicle from a hazardous area.

### State of charge in strong temperature fluctuations

In the case of strong temperature fluctuations and a low state of charge of the high-voltage battery, it may not be possible to start the vehicle again at the beginning of the next trip. Recharge vehicle with a low state of charge in time.

## Service notifications

### Principle

The function displays the service notifications and the corresponding maintenance scopes.

### General information

The distance travelled or the time to the next scheduled maintenance is displayed briefly in the instrument cluster after standby state is switched on.



A service advisor can read out the current service notifications from the vehicle key.

### Display




#### Detailed information on service notifications

More information on the type of service required may be displayed on the control display.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle status"
3. Tilt the Controller to the left.
4.  "Service required"  
Maintenance work and legally mandated inspections are displayed.
5. Select an entry to call up detailed information.

### Icons



Icons	Description
	No service is currently required.
	The time for recommended maintenance or a legally mandated inspection is approaching.
	Service interval is exceeded.

### Entering appointment dates

Enter the dates for the mandatory vehicle inspections.

Make sure that the vehicle's date and time are set correctly.

Via the Central Information Display (CID):


1.  "My MINI"
2. "Vehicle status"
3. Tilt the Controller to the left.
4.  "Service required"
5. "Vehicle inspection"
6. "Date:"
7. Select the desired setting.

### Automatic Service Request

Data regarding the service status or legally mandated vehicle inspections is automatically sent to your authorized service center before the vehicle is due for service.

You can check when your authorized service center was notified.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle status"

3. Tilt the Controller to the left.
4.  "Teleservice Call"

## Speed Limit Info

### Speed Limit Info

#### Principle

Speed Limit Info shows the current maximum permitted speed in the instrument cluster.

#### General information

The camera at the base of the interior mirror detects traffic signs at the edge of the road as well as overhead sign posts. Traffic signs with extra icons for wet road conditions, etc., are also detected and compared with the vehicle's onboard data, such as from the rain sensor, and will be displayed depending on the situation.

With the navigation system, the system takes into account the information stored in the navigation data and also displays speed limits present on routes without signs.


#### Safety information

##### Warning

The system cannot serve as a substitute for the driver's personal judgment in assessing the traffic situation. Based on the limits of the system, it cannot independently react to all traffic situations. There is a risk of accident. Adjust driving style to traffic conditions. Watch the surrounding traffic situation closely, be ready to take over steering and braking at any time, and actively intervene where appropriate.

## Overview

### Camera

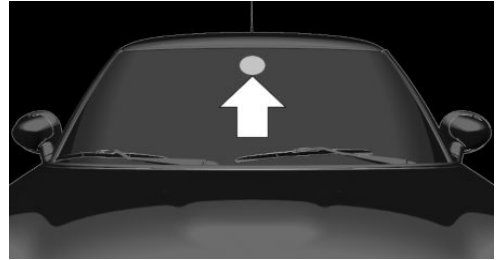

The camera is installed near the interior mirror.

Keep the windshield in front of the interior mirror clean and clear.

### Display

Speed Limit Info is displayed in the instrument cluster.

#### Speed Limit Info



The last speed limit detected.



With navigation system: Speed Limit Info is not available.

Speed Limit Info can also be displayed in the Head-up display.

### System limits

The system function may be limited and may provide incorrect information in the following situations:

- In heavy fog, wet conditions, or snow-fall.
- When traffic signs are fully or partially concealed by objects, stickers or paint.
- When driving very close to the vehicle in front of you.
- When driving toward bright lights or strong reflections.
- When the windshield in front of the interior mirror is fogged up, dirty or covered by a sticker, etc.
- In the event of incorrect detection by the camera.
- If the speed limits stored in the navigation system are incorrect.
- In areas not covered by the navigation system.
- When roads deviate from the navigation, such as due to changes in road layout.
- When passing buses or trucks with a speed sticker.
- If the traffic signs are non-conforming.
- When traffic signs that are valid for a parallel road are detected.
- During calibration of the camera immediately after vehicle delivery.




## Selection lists

### General information

Depending on the vehicle equipment, the buttons on the steering wheel and the display in the instrument cluster can be used to display or use the following:

- Current audio source.
- Phone redial.
- Turn on voice activation system.

### Activating a list and adjusting the setting

Button on the steering wheel	Function
	Move selection up.
	Move selection down.
	Confirm the selection.

### Display




## On-board computer

### Principle

The on-board computer displays different vehicle data in the instrument cluster, such as average values.



## Calling up information

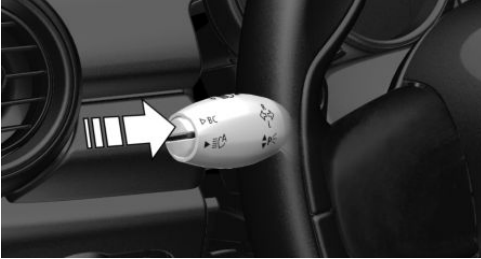

Press the button on the turn signal lever. Information is displayed in the instrument cluster.

### Information at a glance

Repeatedly pressing the button on the turn signal lever calls up the following information:

- Average electrical consumption.
- Average speed.
- Charge state of the high-voltage battery.
- Date.
- Distance to destination.  
When destination guidance is activated in the navigation system.
- Arrival time.  
When destination guidance is activated in the navigation system.
- Trip odometer.


The unit of measurement of some information can be changed.

Setting units of measurement, refer to page 48.

### Selecting information


Depending on the vehicle equipment, you can select what information from the on-board computer can be accessed in the instrument cluster.

Via the Central Information Display (CID):

1.  "My MINI"
  2. "System settings"
  3. "Displays"
  4. "Instrument panel"
  5. Select the desired setting.
- Settings are stored for the profile currently used.

### Information in detail

#### Charge state indicator of the high-voltage battery as a percentage



The current charge state of the high-voltage battery can be displayed as a %-value.


#### Average electrical consumption

The average electrical consumption is determined on the basis of various distances. Periods when the vehicle is parked with drive-ready state switched off are not considered.

#### Average speed

Periods when the vehicle is parked with drive-ready state switched off are not included when calculating average speed.

## Resetting average values

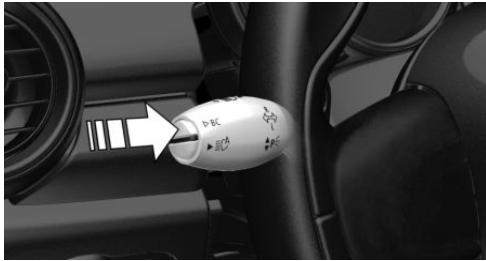

Press and hold the button on the turn signal lever.

## Distance to destination

Depending on the vehicle equipment, the distance remaining to the destination is displayed if a destination is entered in the navigation system before the trip is started.

The distance to the destination is adopted automatically.

## Arrival time

Depending on the vehicle equipment, the estimated arrival time is displayed if a destination is entered in the navigation system before the trip is started.

The prerequisite is that the time must be correctly set.

## On-board computer on the control display

### Principle

The on-board computer displays different vehicle data on the control display, such as average values.

### General information

Two types of on-board computers are available on the control display:

- "Onboard info": Average values, e.g., power consumption, are displayed. The values can be reset individually.
- "Trip computer": the values deliver an overview of a specific distance covered and can be reset as often as necessary.

## Calling up the on-board computer or trip computer

Via the Central Information Display (CID):

1. "My MINI"
2. "Driving information"
3. "Onboard info" or "Trip computer"

## Resetting the on-board computer

Via the Central Information Display (CID):

1. "My MINI"
2. "Driving information"
3. "Onboard info"
4. "Consumption" or "Speed"
5. "OK"

## Resetting the trip computer

Via the Central Information Display (CID):

1. "My MINI"
2. "Driving information"
3. "Trip computer"
4. Tilt the Controller to the left, if needed.
  - "Reset": all values are reset.
  - "Automatic reset": all values are reset approx. 4 hours after the vehicle has come to a standstill.
5. If necessary, "OK"

## Speed warning

### Principle


The system can be used to set a speed limit. A warning will be issued when this speed limit is exceeded.

### General information

The warning is repeated if the vehicle speed exceeds the set speed limit again, after it has dropped below it by 3 mph/5 km/h.


### Adjusting

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Speed warning"
4. "Warning at:"
5. Turn the Controller until the desired speed is displayed.
6. Press the Controller.


### Activate/deactivate

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Speed warning"
4. "Speed warning"

### Applying current speed as the speed warning

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Speed warning"
4. "Select current speed"

## LED ring on the central instrument cluster

### Principle

The LED ring displays light animations to represent specific functions.

### Basic displays

Basic functions, such as the state of charge of the high-voltage battery, can be set to be displayed continually if so desired.


### Event displays

Functions that are only displayed temporarily, for instance the volume or temperature settings, can be set as event displays.

Several vehicle assistance functions can also be displayed on the LED ring. This display corresponds with the displays of the function in the respective display.


### Switching on/off LED ring

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Displays"
4. "Center Instrument"
5. "Center Instrument"

### Adjusting the LED ring


Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Displays"
4. "Center Instrument"
5. "Basic display" or "Event display"
6. Select the desired setting.

## Setting the brightness

The brightness can be adjusted when night lighting is active in the instrument cluster.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Displays"
4. "Center Instrument"
5. "Brightness at night"
6. Turn the Controller until the desired brightness is set.
7. Press the Controller.

The setting is stored for the driver profile currently used.

## MINI Head-up display

### Principle

The Head-up display projects important information in the driver's field of view, for instance the speed.

### General information

Follow the instructions for cleaning the Head-up display. For additional information, see the chapter on care.

### Safety information

#### Warning

When extending and retracting the projection screen of the Head-up display, body parts can be jammed. There is a risk of injury. Make sure that the area of movement of the projection screen is clear when extending and retracting.

#### NOTICE

The Head-up display consists of sensitive components that can easily be scraped or damaged. There is a risk of damage to property. Do not place any objects on the Head-up display, attach to system components or plug into the system. Do not move the moving parts manually.

### Overview




The Head-up display is switched on.

### Switching the Head-up display on/off

When switching on, the projection screen of the Head-up display is extended. When switching off, the projection screen of the Head-up display is retracted again.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Displays"
4. "Head-Up Display"
5. "Head-Up Display"

### Display

#### Overview

The following information is displayed on the Head-up display:

- Vehicle speed.
- Navigation instructions.
- Check Control messages.
- Selection list from the instrument cluster.
- Driver assistance systems.

Some of this information is only displayed briefly as needed.

### Selecting displays in the Head-up display

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Displays"
4. "Head-Up Display"
5. "Displayed information"
6. Select the desired displays in the Head-up display.


Settings are stored for the driver profile currently used.

### Setting the brightness

The brightness is automatically adjusted to the ambient brightness.

The base setting can be adjusted manually.

Via the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Displays"
4. "Head-Up Display"
5. "Brightness"
6. Turn the Controller until the desired brightness is set.
7. Press the Controller.


When the low beams are switched on, the brightness of the Head-up display can be

adjusted using the instrument lighting, refer to page 139.

The setting is stored for the driver profile currently used.

### Adjusting the height

Via the Central Information Display (CID):


1.  "My MINI"
2. "System settings"
3. "Displays"
4. "Head-Up Display"
5. "Height"
6. Turn the Controller until the desired height is reached.
7. Press the Controller.

The setting is stored for the driver profile currently used.

### Setting the rotation

The screen of the Head-up display can be rotated around its own axis.

Via the Central Information Display (CID):



1.  "My MINI"
2. "System settings"
3. "Displays"
4. "Head-Up Display"
5. "Rotation"
6. Turn the Controller until the desired setting is selected.
7. Press the Controller.

The setting is stored for the driver profile currently used.

### Display visibility

The visibility of the displays in the Head-up display is influenced by the following factors:

- Certain seat positions.
- Objects on the cover of the Head-up display.
- Sunglasses with certain polarization filters.
- Wet road.
- Unfavorable light conditions.

Icons	Description
	"Service required": displaying service notifications, refer to page 126.
	"Teleservice Call"

## Vehicle status

### General information




The status can be displayed and actions performed for several systems.

### Going to the vehicle status

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle status"
3. Tilt the Controller to the left.

### Information at a glance

Icons	Description
	"Flat Tire Monitor": Status of the flat tire monitor, refer to page 150.
	"Tire Pressure Monitor": status of the Tire Pressure Monitor, refer to page 145.
	"Check Control": Check Control messages are stored in the background and can be displayed on the control display. Displaying stored Check Control messages, refer to page 123.

# Lights

## Vehicle features and options




This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.




## Overview

### Switches in the vehicle






The light switch element is located next to the steering wheel.

Icon	Function
	Bad weather light.
	Automatic headlight control. Cornering light.
	Lights off. Daytime driving lights.

Icon	Function
	Parking lights.
	Low beams.
	Instrument lighting.

## Parking lights, low beams and roadside parking lights

### General information

Switch position:  ,  , 

If the driver's door is opened when standby state is switched off, the exterior lighting is automatically switched off.

### Parking lights

Switch position: 

The vehicle is illuminated on all sides.

Do not use the parking lights for extended periods; otherwise, they might drain the vehicle battery and it would then be impossible to switch on drive-ready state.

When parking, switch on the one-sided roadside parking light, refer to page [136](#).

### Low beams

Switch position: 


The low beams illuminate when standby state is switched on.

## Canada: roadside parking light

### Principle

The vehicle can be illuminated on one side.

### Turning on

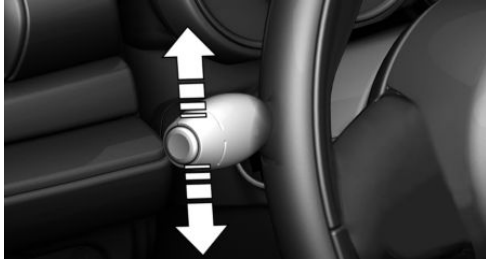

With radio-ready state switched off, press the lever either up or down past the resistance point for approx. 2 seconds.

### Turning off

Briefly press the lever to the resistance point in the opposite direction.

## Welcome lights and pathway lighting

### Welcome lights

#### General information

Depending on the vehicle equipment and the ambient brightness, individual lighting functions may be switched on briefly when the vehicle is unlocked.

#### Activate/deactivate

Switch position:  , 

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"

3. "Lighting"
4. "Exterior lighting"
5. "Welcome lights"

The setting is stored for the driver profile currently used.

### Pathway lighting


#### General information

The low beams stay illuminated for a particular time if the high beams are switched on after radio-ready state is switched off.

Canada: the low beams stay illuminated for a particular time if the headlight flasher is switched on after radio-ready state is switched off.

#### Setting the duration

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Lighting"
4. "Exterior lighting"
5. "Pathway lighting"
6. Set the duration.

The setting is stored for the driver profile currently used.

## Automatic headlight control

### Principle


The low beams are switched on and off automatically depending on the ambient brightness, for example in tunnels, in twilight or if there is precipitation.

#### General information

A blue sky with the sun low on the horizon can cause the lights to be turned on.



## Activating

Switch position: 

The indicator light in the instrument cluster is illuminated when the low beams are switched on.

## System limits




The automatic headlight control cannot replace your personal judgment of lighting conditions.

For example, the sensors are unable to detect fog or hazy weather. In these situations, turn the lights on manually.


## Daytime driving lights

### General information

Switch position:

-  , 
- Depending on the national-market version: 


The daytime driving lights illuminate when standby state is switched on.

Depending on the national-market version: after switching off the Standby state, the parking lights will illuminate in position  .

### Activate/deactivate

In some countries, daytime driving lights are mandatory, so it may not be possible to deactivate the daytime running lights.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Lighting"
4. "Exterior lighting"
5. Select the desired setting.

Settings are stored for the currently used vehicle key.

## Cornering light

### General information

Switch position: 

In tight curves, for instance on mountainous roads or when turning, an additional cornering light is switched on that illuminates the inside of the curve when the vehicle is moving below a certain speed.

The cornering light is automatically switched on depending on the steering-wheel angle or, where applicable, the use of turn signals.

When driving in reverse, the cornering lights may be automatically switched on regardless of the steering-wheel angle.

## Adaptive headlight range control

The adaptive headlight range control feature balances out acceleration and braking processes as well as the vehicle load conditions in order to avoid blinding oncoming traffic. Illumination of the road is optimized.

## Automatic High Beam Assistant

### Principle

The Automatic High Beam Assistant detects other road users early on and automatically switches the high beams on or off depending on the traffic situation.

## General information

The Automatic High Beam Assistant ensures that the high beams are switched on, whenever the traffic situation allows. In the low speed range, the high beams are not switched on by the system.

The system responds to light from oncoming traffic and traffic driving ahead of you, and to ambient lighting, for instance in towns and cities.

The high beams can be switched on and off manually at any time.

## Activate/deactivate



Switch position: 

Press the button on the turn signal lever.



The indicator light in the instrument cluster is illuminated when the low beams are switched on.

The headlights are automatically changed between low beams and high beams.



The blue indicator light in the instrument cluster illuminates when the system switches on the high beams.

The Automatic High Beam Assistant is deactivated when manually switching the high beams on and off, refer to page 108.

To reactivate the Automatic High Beam Assistant, press the button on the turn signal lever.

## System limits

The Automatic High Beam Assistant cannot replace the driver's personal judgment of when to use the high beams. In situations that require this, therefore dim manually.

The system is not fully functional in the following situations, and driver intervention may be necessary:

- In very unfavorable weather conditions, such as fog or heavy precipitation.
- When detecting poorly-lit road users such as pedestrians, cyclists, horseback riders and wagons; when driving close to train or ship traffic; or at animal crossings.
- In tight curves, on hilltops or in depressions, in crossing traffic or half-obscured oncoming traffic on highways.
- In poorly-lit towns and cities or in the presence of highly reflective signs.
- When the windshield in front of the interior mirror is fogged up, dirty or covered with stickers, etc.

## Fog lights

### Bad weather light

#### Principle

The bad weather light ensures optimized illumination of the roadway in poor visibility, such as fog or rain. The light distribution of the low beams is adapted to the visibility.

#### Functional requirement

The automatic headlight control must be activated before switching on the bad weather light.

## Turning on/off



Press the button.



The indicator light in the instrument cluster is illuminated when the bad weather light is switched on.

## Instrument lighting

### Functional requirement

The parking lights or low beams must be switched on to set the brightness.

### Adjusting



Adjust the brightness with the thumbwheel.

## Interior lights

### General information

Depending on the equipment, the interior lights, footwell lights, entry lights, and courtesy lights are controlled automatically.

The brightness of some of these lights is influenced by the thumbwheel for the instrument lighting.

## Overview



- 1 Interior lights
- 2 Reading lights
- 3 Ambient light

### Switching the interior lights on/off



Press the button.

To switch off permanently: press the button and hold for approx. 3 seconds.

### Switching the reading lights on and off manually



Press the button.

The reading lights are located in the front next to the interior lights.


### Ambient light

#### General information

Depending on the equipment version, lighting can be adjusted for some lights in the car's interior.

#### Activating/deactivating

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Lighting"

4. "Interior lighting"
  5. "Ambient lighting"
  6. Select the desired setting.
- Settings are stored for the profile currently used.

### Changing color



Push the switch forward or back: manual color change.



Press the switch forward or backward and hold for approx. 3 seconds until the Ambient Light


flashes several times: automatic color change. Push the switch again to end color changes.

The colors of the Ambient Light depend on the respectively set color world, refer to page [49](#).

### Setting the brightness

Depending on the equipment, the brightness of the ambient light can be adjusted via the thumbwheel for the instrument lighting or on the control display.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Lighting"
4. "Interior lighting"
5. "Brightness"
6. Adjust the brightness.


# Safety

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily avail-

able in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Airbags

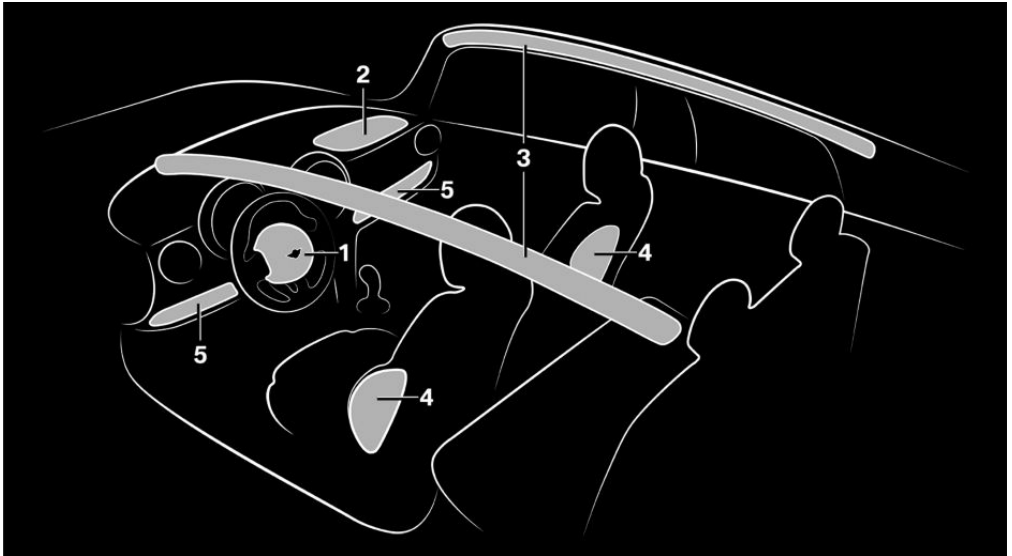

- |                                 |               |
|---------------------------------|---------------|
| 1 Front airbag, driver          | 4 Side airbag |
| 2 Front airbag, front passenger | 5 Knee airbag |
| 3 Head airbag                   |               |

### Front airbags

Front airbags help protect the driver and the front passenger by responding to frontal impacts in which seat belts alone would not provide adequate protection.

### Side airbag

In the event of a side collision, the side airbag protects the side of the body in the chest and lap area.

## Head airbag

In the event of a side collision, the head airbag protects the head.

## Ejection Mitigation

The head airbag system is designed as an ejection mitigation countermeasure to reduce the likelihood of ejections of vehicle occupants through side windows during rollovers or side collision events.

## Knee airbag

Depending on the national-market version: The knee airbag protects the legs in the event of a frontal impact.

## Protective effect

Airbags are not deployed in every impact situation, for instance in less severe accidents or rear-end collisions.

## Information on optimum protective effect of the airbags

### Warning

If the seat position is incorrect or the deployment area of the airbags is impaired, the airbag system cannot provide protection as intended and may cause additional injuries due to deployment. There is a risk of injury or danger to life. Follow the information on achieving the optimum protective effect of the airbag system.

- Keep a distance from the airbags.
- Always grasp the steering wheel on the steering wheel rim. Hold your hands at the 3 o'clock and 9 o'clock positions to keep the risk of injury to your hands or arms as low as possible when the airbag is deployed.
- Adjust seat and steering wheel so that hands can be crossed over the steer-

ing wheel. Select the settings so that the shoulder rests against the backrest when crossing the hands and the upper body is as far back as possible while still maintaining a comfortable grip on the steering wheel.

- Make sure that the front passenger is sitting correctly, i.e., with their feet and legs in the footwell, not resting on the dashboard.
- Make sure that occupants keep their heads away from the side airbag.
- There should be no additional persons, animals or objects between an airbag and a person.
- Dashboard and windshield on the passenger's side must stay clear - do not attach adhesive film or coverings and do not attach brackets or cables, for instance for navigation devices or mobile phones.
- Do not bond the airbag cover panels with adhesive, do not cover them or modify them in any way.
- Do not use the cover of the front airbag on the passenger's side as a storage area.
- Do not attach slip covers, seat cushions or other objects to the front seats that are not specifically suited for seats with integrated side airbags.
- Do not hang pieces of clothing, such as jackets, over the backrests.
- Never modify either the individual components or the wiring in the airbag system. This also applies to steering wheel covers, the dashboard, and the seats.
- Do not disassemble the airbag system.

Even when you follow all instructions very closely, injury from contact with the airbags cannot be fully ruled out in certain situations.

The ignition and inflation noise may lead to short-term and, in most cases, temporary hearing impairment in sensitive occupants. Vehicle modifications for a person with disabilities may affect the air bag system; contact MINI Customer Relations for further information.

Warnings and information on the airbags are also found on the sun visors.

## Operational readiness of the airbag system

### Safety information

#### Warning

Individual components can be hot after deployment of the airbag system. There is a risk of injury. Do not touch individual components.

#### Warning

Improperly executed work can lead to failure, malfunction or unintentional deployment of the airbag system. In the case of a malfunction, the airbag system might not deploy as intended despite the accident severity. There is a risk of injury or danger to life. Have the airbag system checked, repaired, disassembled, and scrapped by an authorized service center or another qualified service center or repair shop.

### Correct function



When standby is switched on, the warning light in the instrument cluster illuminates briefly, thereby indicating the operational readiness of the entire airbag system and the seat belt tensioners.

### Airbag system fault

- Warning light does not come on when standby state is switched on.
- The warning light illuminates continuously.

Have the vehicle checked by an authorized service center or another qualified service center or repair shop.

## Automatic deactivation of the front passenger airbags

### Principle

The system reads if the front passenger seat is occupied by measuring the human body's resistance.

Front, knee, and side airbag on the front passenger's side are activated or deactivated.

### General information

Before transporting a child on the front passenger seat, refer to the safety information and instructions for children on the front passenger seat, see Children.

### Safety information

#### Warning

To ensure the front passenger airbag function, the system must be able to detect whether a person is sitting in the front passenger seat. The entire seat surface must be used for this purpose. There is a risk of injury or danger to life. Make sure that the front passenger keeps his or her feet in the footwell.

### Fault of the automatic deactivation system

When transporting older children and adults, the front passenger airbags may be

deactivated in certain seat positions. In this case, the indicator light for the front passenger airbags illuminates.

In this case, change the seat position so that the front passenger airbags are activated and the indicator light goes out.

If it is not possible to activate the airbags, have the person sit in the rear seat.

To enable accurate recognition of the occupied seat surface

- Do not attach covers, cushions, ball mats or other items to the front passenger seat unless they are specifically determined to be safe for use on the front passenger seat.
- Do not place any electronic devices on the front passenger seat if a child restraint system is to be installed on it.
- Do not place objects under the seat that could press against the seat from below.
- No moisture in or on the seat.

### Indicator light for the front passenger airbags



The indicator light for the front passenger airbags indicates the operating state of the front passenger airbags.

The light indicates whether the airbags are either activated or deactivated.



- The indicator light illuminates when a child is properly seated in a child restraint system or when the seat is empty. The airbags on the passenger's side are not activated.
- The indicator light does not illuminate when, for instance, a correctly seated person of sufficient size is detected on the seat. The airbags on the passenger's side are activated.

### Detected child restraint systems

The system generally detects children seated in a child restraint system, particularly in child restraint systems required by NHTSA at the point in time when the vehicle was manufactured. After installing a child restraint system, make sure that the indicator light for the front passenger airbags illuminates. This indicates that the child restraint system has been detected and the front passenger airbags are not activated.

### Strength of the driver's and front passenger airbag

The power that deploys the driver's/front passenger airbags depends on the position of the driver's/front passenger seat.

To maintain the accuracy of this function over the long-term, calibrate the front seats as soon as a relevant Check Control message is displayed. A message also appears on the control display.



## Calibrating the front seats

### Warning

There is a danger of jamming when moving the seats. There is a risk of injury or risk of damage to property. Make sure that the travel path of the seat is clear prior to any adjustment.

An appropriate Check Control message is displayed.

1. Move the respective seat all the way forward.
2. Move the respective seat forward again. The seat moves forward briefly.
3. Readjust the seat to the desired seat position.

The calibration procedure is completed when the Check Control message disappears.

If the message continues to be displayed, repeat the calibration.

If the message does not disappear after a repeat calibration, have the vehicle checked as soon as possible.

## Tire pressure monitor

### Principle

The system monitors tire pressure in the four mounted tires. The system warns you if there is a significant loss of pressure in one or more tires.

### General information

Sensors in the tire valves measure the tire inflation pressure and, depending on the model, the tire temperature.

Further information and instructions on using the system can also be found under Tire inflation pressure, refer to page [240](#).

### Functional requirements

The following prerequisites must be met for the system; otherwise, reliable notification of a tire pressure loss is not assured:

- After a tire or wheel change, a reset was performed with the correct tire inflation pressure.
- After the tire inflation pressure was adjusted to a new value, a reset was performed.
- Wheels with TPM wheel electronics.

### Status display

#### Current status

The system status can be displayed on the control display, e.g., whether or not the system is active.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle status"
3.  "Tire Pressure Monitor"

The current status is displayed.

### Tire conditions

#### General information

Tire and system status are indicated by the color of the wheels and a text message on the control display.

#### All wheels green

System is active and will issue a warning related to the tire inflation pressures stored during the last reset.

### One to four yellow wheels

A flat tire or major tire pressure loss has occurred in the indicated tires.

### Gray wheels

It may not be possible to identify tire pressure losses.

Possible causes:



- Malfunction.
- The system is being reset.

### Additional information

The status control display additionally shows the current tire inflation pressures. The values shown are instantaneous measurements and may vary depending on driving or weather conditions.

### Resetting the system

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle status"
3.  "Tire Pressure Monitor"
4. Turn on drive-ready state and do not drive off.
5. Reset tire pressure: "Perform reset".
6. Drive off.

The wheels are displayed in gray and the following is displayed: "Resetting Tire Pressure Monitor...".

After a travel time of several minutes, the set tire inflation pressures are accepted as reference values. The resetting process is completed automatically while driving.

After successful completion of the reset, the tires appear in green on the control display and "Tire Pressure Monitor active. See label for recommended pressures." is displayed.

You may interrupt this trip at any time. When you continue driving the reset resumes automatically.

### Messages

#### General information

A low tire inflation pressure may cause the DSC Dynamic Stability Control to be switched on.

#### Safety information



#### Warning

A damaged regular tire with low or no tire inflation pressure impacts handling, such as steering and braking response. Runflat tires can maintain limited stability. There is a risk of accident. Do not continue driving if the vehicle is equipped with normal tires. Follow the information on runflat tires and continued driving with these tires.

#### If a tire inflation pressure check is required

#### Message

An icon with a Check Control message appears on the control display.


Icon	Possible cause
	The system has detected a wheel change, but no reset was done. No reset was performed for the system. The system issues a warning based on the tire inflation pressures stored during the last reset. Inflation was not carried out according to specifications.
	The tire inflation pressure has fallen below the level of the last reset.

### Measure


1. Check the tire pressure and correct as needed.
2. Reset the system.

### If the tire inflation pressure is too low

#### Message

 A yellow warning light is illuminated in the instrument cluster.

In addition, an icon with a Check Control message appears on the control display.


Icon	Possible cause
	There is a tire pressure loss. No reset was performed for the system. The system issues a warning based on the tire inflation pressures stored during the last reset.

### Measure


1. Reduce your speed and drive moderately. Do not exceed a speed of 80 mph/130 km/h.
2. At the next opportunity, for instance filling station, check and correct the tire inflation pressure in all four tires, if necessary.
3. Reset the system.

### If there is a significant tire pressure loss

#### Message

 A yellow warning light is illuminated in the instrument cluster.

In addition, an icon with the affected tire appears in a Check Control message on the control display.

Icon	Possible cause
	There is a flat tire or a major tire pressure loss. No reset was performed for the system. The system issues a warning based on the tire inflation pressures stored during the last reset.

### Measure

1. Reduce your speed and stop cautiously. Avoid sudden braking and steering maneuvers.
2. Check whether the vehicle is fitted with standard tires or runflat tires.

Runflat tires, refer to page 246, are labeled with a circular icon containing the letters RSC marked on the tire sidewall.

## Actions in the event of a flat tire

### Standard tires

#### 1. Identify the damaged tire.

To do this, check the tire pressure in all four tires, for instance using the tire pressure display of a flat tire kit.

If the tire pressure in all four tires is correct, the Tire Pressure Monitor may not have been reset. In this case, perform the reset.

If the tire inflation pressure in all four tires is correct, the flat tire monitor may not have been initialized. In this case, initialize the system.

If tire damage cannot be identified, contact an authorized service center or another qualified service center or repair shop.

#### 2. Repair the flat tire, e.g., with a flat tire kit or by changing the wheel.

Use of sealing compound, for instance from the flat tire kit, may damage the wheel electronics. In this case, have the electronics checked and replaced at the next opportunity.

### Runflat tires

#### Safety information

#### Warning

The vehicle handles differently when a runflat tire has insufficient or no tire pressure; for instance, reduced directional stability when braking, braking distances are longer and the self-steering properties will change. There is a risk of accident. Drive moderately and do not exceed a speed of 50 mph/80 km/h.

### Maximum speed

You may continue driving with a damaged tire at speeds up to 50 mph/80 km/h.

### Continued driving with a flat tire

If continuing to drive with a damaged tire:

1. Avoid sudden braking and steering maneuvers.
2. Do not exceed a speed of 50 mph/80 km/h.
3. Check the tire inflation pressure in all four tires at the next opportunity.

If the tire pressure in all four tires is correct, the Tire Pressure Monitor may not have been reset. In this case, perform the reset.

### Possible distance traveled with a depressurized tire

The possible distance which may be safely traveled varies depending on how the vehicle is loaded and used, e.g., speed, road conditions, outside temperature. The distance traveled may be less but may also be more if an economical driving style is used.

If the vehicle is loaded with an average weight and used under favorable conditions, the possible distance traveled may be up to 50 miles/80 km.

### Vehicle handling with damaged tires

Vehicles driven with a damaged tire will handle differently, potentially leading to conditions such as the following:

- Greater likelihood of skidding of the vehicle.
- Longer braking distances.
- Changed self-steering properties.

Modify your driving style. Avoid abrupt steering maneuvers or driving over obstacles, for instance curbs or potholes.

## Final tire failure

Vibrations or loud noises while driving can indicate the final failure of a tire.

Reduce speed and stop; otherwise, pieces of the tire could come loose and cause an accident.

Do not continue driving. Contact an authorized service center or another qualified service center or repair shop.

## System limits

### Temperature

The tire inflation pressure depends on the tire's temperature.

Driving or exposure to the sun will increase the tire temperature, thus increasing the tire inflation pressure.

The tire inflation pressure is reduced when the tire temperature falls again.

These circumstances may cause a warning when temperatures fall very sharply.

### Sudden tire pressure loss

The system cannot indicate sudden serious tire damage caused by external circumstances.

### Failure performing a reset

The system does not function properly if a reset has not been carried out, for instance a flat tire is reported though tire inflation pressures are correct.

### Malfunction



The yellow warning light flashes and is then illuminated continuously. A Check Control message is displayed.

It may not be possible to identify tire pressure losses.

Examples and recommendations in the following situations:

- Wheel without TPM wheel electronics is mounted: Have it checked by an authorized service center or another qualified service center or repair shop as needed.
- Malfunction: have the vehicle checked by an authorized service center or another qualified service center or repair shop.
- The system was unable to complete the reset. Perform a system reset again.
- Fault caused by systems or devices with the same radio frequency: after leaving the area of the interference, the system automatically becomes active again.

## Declaration according to NHTSA/ FMVSS 138 Tire Pressure Monitoring System

Each tire, including the spare (if provided) should be checked monthly when cold and inflated to the inflation pressure recommended by the vehicle manufacturer on the vehicle placard or tire inflation pressure label. (If the vehicle has tires of a different size than the size indicated on the vehicle placard or tire inflation pressure label, you should determine the proper tire inflation pressure for those tires.) As an added safety feature, the vehicle has been equipped with a tire pressure monitoring system (TPMS) that illuminates a low tire pressure telltale when one or more of your tires is significantly under-inflated. Accordingly, when the low tire pressure telltale illuminates, you should stop and check your tires as soon as possible, and inflate them to the proper pressure. Driving on a significantly under-inflated tire causes the tire to over-heat and can lead to tire failure. Under-inflation also reduces fuel efficiency and tire tread life, and may affect the vehicle's handling and stopping ability. Please note that the TPMS is not a substitute for proper tire maintenance, and it is the driver's responsibility to maintain correct tire pressure, even

if under-inflation has not reached the level to trigger illumination of the TPMS low tire pressure telltale. The vehicle has also been equipped with a TPMS malfunction indicator to indicate when the system is not operating properly. The TPMS malfunction indicator is combined with the low tire pressure telltale. When the system detects a malfunction, the telltale will flash for approximately one minute and then remain continuously illuminated. This sequence will continue upon subsequent vehicle start-ups as long as the malfunction exists. When the malfunction indicator is illuminated, the system may not be able to detect or signal low tire pressure as intended. TPMS malfunctions may occur for a variety of reasons, including the installation of replacement or alternate tires or wheels on the vehicle that prevent the TPMS from functioning properly. Always check the TPMS malfunction telltale after replacing one or more tires or wheels on the vehicle to ensure that the replacement or alternate tires and wheels allow the TPMS to continue to function properly.

## Flat tire monitor

### Principle

The system detects tire pressure loss on the basis of rotation speed differences between the individual wheels while driving.

In the event of a tire pressure loss, the diameter and therefore the rotational speed of the corresponding wheel changes. The difference will be detected and reported as a flat tire.

The system does not measure the actual inflation pressure in the tires.

## Functional requirements

The following prerequisites must be met for the system; otherwise, reliable notification of a tire pressure loss is not assured:

- After a tire or wheel change, an initialization was performed with the correct tire inflation pressure.
- After the tire pressure was adjusted to a new value, an initialization was performed.

## Status display

The current status of the flat tire monitor can be displayed, e.g., whether the flat tire monitor is active.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle status"
3.  "Flat Tire Monitor"

The status is displayed.

## Initialization required

An initialization must be performed in the following situations:

- After the tire inflation pressure has been adjusted.
- After a tire or wheel change.

## Performing initialization

When initializing, the set tire inflation pressures serve as reference values in order to detect a flat tire. Initialization is started by confirming the tire inflation pressures.

Do not initialize the system when driving with snow chains.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle status"
3.  "Flat Tire Monitor"

4. Turn on drive-ready state and do not drive off.
5. Start the initialization with: "Perform reset".
6. Drive off.

The initialization is completed while driving, which can be interrupted at any time. The initialization automatically continues when driving continues.

## Messages

### General information

When a flat tire is indicated, DSC Dynamic Stability Control is switched on, if needed.

### Safety information

#### Warning


A damaged regular tire with low or no tire inflation pressure impacts handling, such as steering and braking response. Runflat tires can maintain limited stability. There is a risk of accident. Do not continue driving if the vehicle is equipped with normal tires. Follow the information on runflat tires and continued driving with these tires.

### Indication of a flat tire



A yellow warning light is illuminated in the instrument cluster.

In addition, an icon with a Check Control message appears on the control display.

Icon	Possible cause
	There is a flat tire or a major tire pressure loss.

### Measure

1. Reduce your speed and stop cautiously. Avoid sudden braking and steering maneuvers.
2. Check whether the vehicle is fitted with standard tires or runflat tires. Runflat tires, refer to page 246, are labeled with a circular icon containing the letters RSC marked on the tire sidewall.

### Actions in the event of a flat tire

#### Standard tires

1. Identify the damaged tire. To do this, check the tire pressure in all four tires, for instance using the tire pressure display of a flat tire kit. If the tire pressure in all four tires is correct, the Tire Pressure Monitor may not have been reset. In this case, perform the reset. If the tire inflation pressure in all four tires is correct, the flat tire monitor may not have been initialized. In this case, initialize the system. If tire damage cannot be identified, contact an authorized service center or another qualified service center or repair shop.
2. Repair the flat tire, e.g., with a flat tire kit or by changing the wheel.

Use of sealing compound, for instance from the flat tire kit, may damage the wheel electronics. In this case, have the electronics checked and replaced at the next opportunity.

## Runflat tires

### Safety information

#### Warning

The vehicle handles differently when a runflat tire has insufficient or no tire pressure; for instance, reduced directional stability when braking, braking distances are longer and the self-steering properties will change. There is a risk of accident. Drive moderately and do not exceed a speed of 50 mph/80 km/h.

### Maximum speed

You may continue driving with a damaged tire at speeds up to 50 mph/80 km/h.

### Continued driving with a flat tire

If continuing to drive with a damaged tire:

1. Avoid sudden braking and steering maneuvers.
2. Do not exceed a speed of 50 mph/80 km/h.
3. Check the tire inflation pressure in all four tires at the next opportunity.

If the tire inflation pressure in all four tires is correct, the flat tire monitor may not have been initialized. In this case, initialize the system.

### Possible distance traveled with a depressurized tire

The possible distance which may be safely traveled varies depending on how the vehicle is loaded and used, e.g., speed, road conditions, outside temperature. The distance traveled may be less but may also be more if an economical driving style is used.

If the vehicle is loaded with an average weight and used under favorable conditions,

the possible distance traveled may be up to 50 miles/80 km.

### Vehicle handling with damaged tires

Vehicles driven with a damaged tire will handle differently, potentially leading to conditions such as the following:

- Greater likelihood of skidding of the vehicle.
- Longer braking distances.
- Changed self-steering properties.

Modify your driving style. Avoid abrupt steering maneuvers or driving over obstacles, for instance curbs or potholes.

### Final tire failure

Vibrations or loud noises while driving can indicate the final failure of a tire.

Reduce speed and stop; otherwise, pieces of the tire could come loose and cause an accident.

Do not continue driving. Contact an authorized service center or another qualified service center or repair shop.

### System limits

The system could be delayed or malfunction in the following situations:

- A natural, even tire pressure loss in all four tires will not be recognized. Therefore, check the tire inflation pressure regularly.
- Sudden serious tire damage caused by external circumstances cannot be recognized in advance.
- When the system has not been initialized.
- When driving on a snowy or slippery road.



- Sporty driving style: slip on traction wheels, high lateral acceleration (drifting).
- When driving with snow chains.

## Intelligent Safety

### Principle

Intelligent Safety enables central operation of the driver assistance systems.

The intelligent safety systems can help prevent an imminent collision.

- Forward Collision Warning with city collision mitigation, refer to page 154.
- Pedestrian Warning with City light braking function, refer to page 157.
- Lane departure warning, refer to page 160.

### Safety information

#### Warning

The system cannot serve as a substitute for the driver's personal judgment in assessing the traffic situation. Based on the limits of the system, it cannot independently react to all traffic situations. There is a risk of accident. Adjust driving style to traffic conditions. Watch the surrounding traffic situation closely, be ready to take over steering and braking at any time, and actively intervene where appropriate.

#### Warning

Indicators and warnings cannot serve as a substitute for the driver's personal judgment. Due to its limits, the system may not issue warnings or responses, or these may be issued late or in a manner that is not consistent with their normal use. There is

a risk of accident. Adjust driving style to traffic conditions. Watch surrounding traffic closely and actively intervene where appropriate.

#### Warning

When towing with Intelligent Safety systems enabled or Cruise Control switched on, individual functions may not work correctly. There is a risk of accident. Switch off all Intelligent Safety systems and Cruise Control before towing.

## Overview


### Button in the vehicle



 Intelligent Safety button


### Turning on/off


Some Intelligent Safety systems are automatically active after every departure. Some Intelligent Safety systems activate according to the last setting.

 Press button briefly:

- The menu for the Intelligent Safety system is displayed. The systems are individually switched off according to their respective settings.
- LED illuminates orange or goes out respective to their individual settings.

Adjust the settings as needed. The individual settings are stored for the driver profile currently in use.

-  Press button again:
  - All Intelligent Safety systems are switched on.
  - The LED illuminates green.

-  Hold down button:
  - All Intelligent Safety systems are switched off.
  - The LED goes out.

## Forward Collision Warning with city collision mitigation

### Principle

This system helps to prevent accidents. In the event of an accident, the system helps by reducing impact speed.

The system sounds a warning for a possible risk of collision and activates brakes independently, if needed.

The automatic brake intervention occurs with limited force and duration.

A camera at the base of the interior mirror controls the system.

The Forward Collision Warning is available even if cruise control has been deactivated.


The system considers the driver's vehicle handling when responding. If an active driving style is detected, warnings and brake interventions occur less frequently.

### General information

The system issues a two-phase warning of an imminent risk of collision at speeds from approx. 3 mph/5 km/h. The timing of warnings may vary with the current driving situation.

If necessary, a brake intervention will occur. Depending on the equipment and national-market version, the brake intervention will occur up to approx. 35 mph/60 km/h or up to approx. 35 mph/60 km/h.

### Detection range

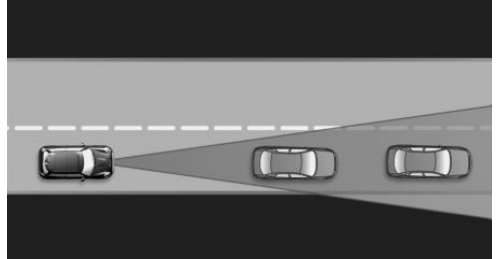

Objects that the system can detect are taken into account.

### Safety information

#### Warning

The system cannot serve as a substitute for the driver's personal judgment in assessing the traffic situation. Based on the limits of the system, it cannot independently react to all traffic situations. There is a risk of accident. Adjust driving style to traffic conditions. Watch the surrounding traffic situation closely, be ready to take over steering and braking at any time, and actively intervene where appropriate.

#### Warning

Indicators and warnings cannot serve as a substitute for the driver's personal judgment. Due to its limits, the system may not issue warnings or responses, or these may be issued late or in a manner that is not consistent with their normal use. There is a risk of accident. Adjust driving style to

traffic conditions. Watch surrounding traffic closely and actively intervene where appropriate.

### Warning

When towing with Intelligent Safety systems enabled or Cruise Control switched on, individual functions may not work correctly. There is a risk of accident. Switch off all Intelligent Safety systems and Cruise Control before towing.


## Overview

### Button in the vehicle



 Intelligent Safety button

### Camera

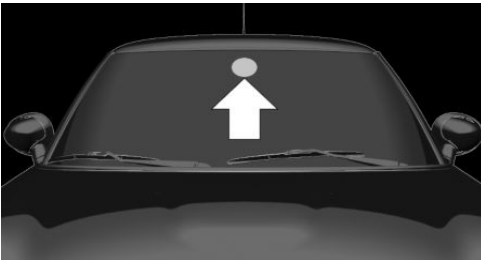

The camera is installed near the interior mirror.

Keep the windshield in front of the interior mirror clean and clear.

## Turning on/off

### Turning on automatically

The system is automatically active when the vehicle is turned on.

### Switching on/off manually



Press button briefly:

- The menu for the Intelligent Safety system is displayed. The systems are individually switched off according to their respective settings.
- LED illuminates orange or goes out respective to their individual settings.

Adjust the settings as needed. The individual settings are stored for the driver profile currently in use.



Press button again:

- All Intelligent Safety systems are switched on.
- The LED illuminates green.




Hold down button:

- All Intelligent Safety systems are switched off.
- The LED goes out.

## Setting the warning time

The warning time can be set via the Central Information Display (CID).



1.  "My MINI"
2. "Vehicle settings"
3. "Intelligent Safety"
4. "Warning time"
5. Select the desired setting.

The selected warning time is stored for the driver profile currently in use.

## Warning with light braking function

### Display

If there is a risk of collision with a detected vehicle, a warning light is shown on the instrument cluster and Head-up display.

Icon	Measure
	Warning light illuminates red: Advance warning. Brake and increase distance.
	Warning light flashes red and acoustic signal sounds: Acute warning. Brake and make an evasive maneuver, if necessary.

### Prewarning

This prewarning is provided, for instance when there is impending risk of a collision or the distance to the vehicle ahead is too small.

If a prewarning is provided, respond by braking as warranted.

### Acute warning with light braking function

An acute warning is displayed when there is an imminent risk of collision due to the vehicle approaching another object at a high speed.

The driver must intervene actively when there is an acute warning. If necessary, the driver is assisted by a minor automatic brake intervention in a possible risk of collision.

Acute warnings may be provided even when there has been no prewarning.

## Brake intervention

The warning prompts the driver to intervene. When a warning occurs, the maximum braking force is used when the brake is applied. In order to activate the brake booster, you must apply the brakes quickly and forcefully. If there is a risk of collision, the system may assist with a minor brake intervention. When the vehicle is traveling at a low speed, the vehicle may come to a complete stop.

The braking intervention can be interrupted by stepping on the accelerator pedal with sufficient force or by actively moving the steering wheel.

The system's ability to detect objects may be limited in some circumstances. Note the limitations of the detection range and functional limitations.

## System limits

### Safety information

#### Warning

Due to its limits, the system may not react, or it may react too late or in a manner that is not consistent with normal use. There may be a risk of accidents or risk of damage to property. Actively intervene as warranted. Refer to the information in this Owner's Manual regarding the scope of the system's operation and limitations.

### Detection range

The system's detection capability is limited. Thus, a system response might not come or might come late.

The following situations may not be detected, for example:

- Slow moving vehicles when you approach them at high speed.
- Vehicles that suddenly swerve in front of you, or strongly decelerating vehicles.
- Vehicles with an unusual rear view.
- Two-wheeled vehicles ahead of you.

### Functional limitations

The system may be limited in the following situations:

- In heavy fog, wet conditions, or snowfall.
- On tight curves.
- If the camera field of view or the windshield is dirty or covered.
- If the driving stability control systems are deactivated, for instance DSC OFF.
- Up to 10 seconds after activating the drive-ready state via the Start/Stop button.
- During calibration of the camera immediately after vehicle delivery.
- If there are constant blinding glares because of oncoming light, for instance from the sun low in the sky.

### Warning sensitivity

The more sensitive the warning settings are, the more warnings are displayed. Therefore, there may also be an excess of unwarranted warnings and responses.

## Pedestrian Warning with City light braking function

### Principle

This system helps to prevent accidents with pedestrians.

When driving in the city speed range, the system will issue a warning if there is immi-

nent risk of a collision with pedestrians, and support this with a light braking function.


The camera at the base of the interior mirror controls the system.

### General information

In sufficiently bright conditions, the system issues a warning of a possible risk of collision with pedestrians and assists with brake intervention just before a collision in the speed range from approx. 6 mph/10 km/h to approx. 35 mph/60 km/h.

The system reacts to people who are within the detection range of the system.

### Detection range

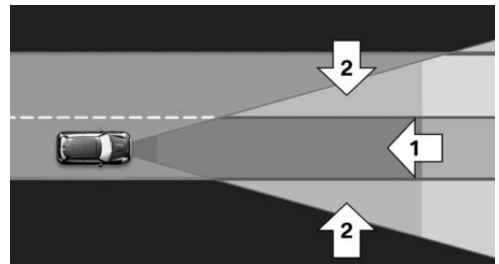

The detection range in front of the vehicle is divided into two areas:

- Central area, arrow 1, directly in front of the vehicle.
- Extended area, arrows 2, to the right and left of the central area.

A collision is imminent if pedestrians are located within the central area. A warning is issued about pedestrians who are located within the extended area only if they are moving in the direction of the central area.

## Safety information

### Warning

The system cannot serve as a substitute for the driver's personal judgment in assessing the traffic situation. Based on the limits of the system, it cannot independently react to all traffic situations. There is a risk of accident. Adjust driving style to traffic conditions. Watch the surrounding traffic situation closely, be ready to take over steering and braking at any time, and actively intervene where appropriate.

### Warning

Indicators and warnings cannot serve as a substitute for the driver's personal judgment. Due to its limits, the system may not issue warnings or responses, or these may be issued late or in a manner that is not consistent with their normal use. There is a risk of accident. Adjust driving style to traffic conditions. Watch surrounding traffic closely and actively intervene where appropriate.

### Warning

When towing with Intelligent Safety systems enabled or Cruise Control switched on, individual functions may not work correctly. There is a risk of accident. Switch off all Intelligent Safety systems and Cruise Control before towing.


## Overview

### Button in the vehicle



 Intelligent Safety button

### Camera

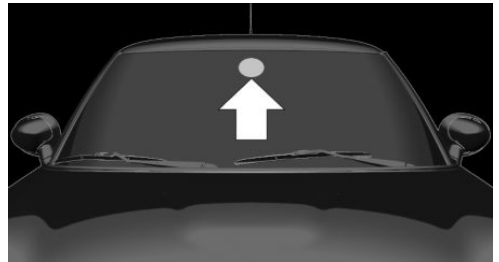

The camera is installed near the interior mirror.


Keep the windshield in front of the interior mirror clean and clear.

## Turning on/off

### Turning on automatically

The system is automatically active when the vehicle is turned on.

### Switching on/off manually

-  Press button briefly:
- The menu for the Intelligent Safety system is displayed. The systems are individually

switched off according to their respective settings.

- LED illuminates orange or goes out respective to their individual settings.

Adjust the settings as needed. The individual settings are stored for the driver profile currently in use.



Press button again:

- All Intelligent Safety systems are switched on.
- The LED illuminates green.



Hold down button:

- All Intelligent Safety systems are switched off.
- The LED goes out.

## Warning with light braking function

### Display

If there is a risk of collision with a detected person, a warning light is shown on the instrument cluster and Head-up display.



A red warning light is displayed and an acoustic warning sounds.

Intervene immediately by braking or make an evasive maneuver.

### Brake intervention

The warning prompts the driver to intervene. When a warning occurs, the maximum braking force is used when the brake is applied. In order to activate the brake booster, you must apply the brakes quickly and forcefully. If there is a risk of collision, the system may assist with a minor brake intervention. When the vehicle is traveling at a low speed, the vehicle may come to a complete stop.

The braking intervention can be interrupted by stepping on the accelerator pedal with sufficient force or by actively moving the steering wheel.

The system's ability to detect objects may be limited in some circumstances. Note the limitations of the detection range and functional limitations.

## System limits

### Safety information

#### Warning

Due to its limits, the system may not react, or it may react too late or in a manner that is not consistent with normal use. There may be a risk of accidents or risk of damage to property. Actively intervene as warranted. Refer to the information in this Owner's Manual regarding the scope of the system's operation and limitations.

### Detection range

The detection capability of the camera is limited.

Thus, a warning might not be issued or be issued late.

The following situations may not be detected, for example:

- Partially covered pedestrians.
- Pedestrians that are not detected as such because of the viewing angle or contour.
- Pedestrians outside of the detection range.
- Pedestrians having a body size less than 32 in/80 cm.

### Functional limitations

The system may be limited or may not be available in the following situations:

- In heavy fog, wet conditions, or snowfall.
- On tight curves.
- If the camera field of view or the windshield is dirty or covered.
- If the driving stability control systems are deactivated, for instance DSC OFF.
- Up to 10 seconds after activating the drive-ready state via the Start/Stop button.
- During calibration of the camera immediately after vehicle delivery.
- If there are constant blinding glares because of oncoming light, for instance from the sun low in the sky.
- When it is dark outside.

## Lane departure warning

### Principle

The lane departure warning alerts when the vehicle on roads with lane markings is about to leave the lane.

### General information

Depending on the country version, the system issues a warning at speeds between 35 mph/55 km/h and 45 mph/70 km/h.

Warnings are issued by means of a steering wheel vibration. The time of the warning may vary depending on the current driving situation.

The system does not provide a warning if the turn signal is set before exiting the lane.

## Safety information

### ⚠ Warning

The system cannot serve as a substitute for the driver's personal judgment in assessing road and traffic situations. There is a risk of accident. Adjust driving style to traffic conditions. Watch surrounding traffic closely and actively intervene where appropriate. Do not jerk the steering wheel in response to a warning.

### ⚠ Warning

Indicators and warnings cannot serve as a substitute for the driver's personal judgment. Due to its limits, the system may not issue warnings or responses, or these may be issued late or in a manner that is not consistent with their normal use. There is a risk of accident. Adjust driving style to traffic conditions. Watch surrounding traffic closely and actively intervene where appropriate.

## Overview


### Button in the vehicle



Intelligent Safety button



## Camera

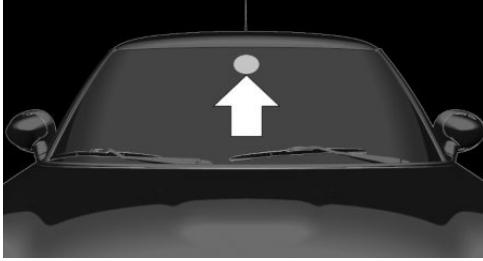

The camera is installed near the interior mirror.


Keep the windshield in front of the interior mirror clean and clear.

## Turning on/off


### Turning on automatically


The lane departure warning is automatically activated after departure, if the function was switched on the last time drive-ready state was switched off.

### Switching on/off manually


-  Press button briefly:
  - The menu for the Intelligent Safety system is displayed. The systems are individually switched off according to their respective settings.
  - LED illuminates orange or goes out respective to their individual settings.

Adjust the settings as needed. The individual settings are stored for the driver profile currently in use.

-  Press button again:
  - All Intelligent Safety systems are switched on.
  - The LED illuminates green.

-  Hold down button:
  - All Intelligent Safety systems are switched off.
  - The LED goes out.

## Instrument cluster with enhanced features: display

-  Indicator light illuminates green: At least one lane boundary line has been detected and warnings may be issued.

## Output of warning

### If you leave the lane

If you leave the lane and if a lane marking has been detected, the steering wheel vibrates.

If the turn signal is switched on before changing the lane, a warning is not issued.

### End of warning

The warning is canceled in the following situations:

- Automatically after approx. 3 seconds.
- When returning to your own lane.
- When braking hard.
- When flashing.

## System limits

### Safety information

#### Warning

Due to its limits, the system may not react, or it may react too late or in a manner that is not consistent with normal use. There may be a risk of accidents or risk of damage to property. Actively intervene as warranted. Refer to the information in

this Owner’s Manual regarding the scope of the system’s operation and limitations.

### Functional limitations

The system may be limited in the following situations:

- In heavy fog, wet conditions, or snow-fall.
- In the event of missing, worn, poorly visible, merging, diverging, or multiple lane markings such as in construction areas.
- When lane markings are covered in snow, ice, dirt or water.
- In tight curves or on narrow roads.
- When lane markings are covered by objects.
- When driving very close to the vehicle in front of you.
- When driving toward bright lights.
- When the windshield in front of the interior mirror is fogged up, dirty or covered with stickers, etc.
- During calibration of the camera immediately after vehicle delivery.

## Manual Speed Limiter

### Principle

The system can be used to set a speed limit, for instance to prevent the vehicle from exceeding speed limits.

### General information

The system can limit the speed, starting at a value of 20 mph/30 km/h. The vehicle can be driven at any speed below the set speed limit.

### Exceeding the speed limit

In special situations, the speed limit can be exceeded by intentional acceleration.

When the vehicle speed exceeds the set speed limit, a warning is issued.




### No brake intervention

If the set speed limit is reached or unintentionally exceeded, such as when driving downhill, the vehicle is not actively braked.

When the speed limit is set during a trip to a value below the driving speed, the vehicle coasts until its driving speed drops below the set speed limit.

## Overview

### Steering wheel buttons, left

Button	Function
	System on/off.
	Increase the speed limit.
	Reduce the speed limit.

## Operation

### Turning on

 Press the button on the steering wheel.

The current speed is accepted as the speed limit.

If the system is switched on while the vehicle is stationary or driving at low speeds, 20 mph/30 km/h is set as the speed limit.

The set speed is displayed under the LIMIT or LIM indicator.

When the speed limit is activated, Dynamic Stability Control is switched on as necessary.

## Turning off



 Press the button on the steering wheel.





The system switches off automatically in the following situations, for example:

- When shifting into reverse gear.
- When drive-ready state is switched off.
- When Cruise Control is switched on.
- When activating Dynamic Traction Control or deactivating Dynamic Stability Control.

The displays turn off.

## Changing the speed limit

 or  button: press up or down repeatedly until the desired speed limit is set.

-  or  button: each time it is pressed to the resistance point, the speed limit increases or decreases by 1 mph, 1 km/h.
-  or  button: each time it is pressed past the resistance point, the desired speed changes by a maximum of 5 mph/10 km/h.

When the speed limit is set during a trip to a value below the current speed, the vehicle coasts until it drops to the set speed limit.

## Exceeding the speed limit

The speed limit can be exceeded intentionally.

Press the accelerator pedal all the way down to intentionally exceed the set speed limit.

When the vehicle speed drops below the set speed limit, the limit is automatically reactivated.

## Warning when the speed limit is exceeded

### Visual warning

If the set speed limit is exceeded, the LIMIT or LIM indicator flashes while the vehicle speed is greater than the speed limit.

### Acoustic warning

- If the speed limit is exceeded unintentionally, a signal sounds.
- When the speed limit is reduced to below the vehicle speed while driving, a signal sounds after approx. 30 seconds.
- When the speed limit is intentionally exceeded by stepping on the accelerator pedal all the way down, there is no signal.

## Displays in the instrument cluster



The desired speed is displayed under the LIM indicator.

- The indicator does not illuminate: the system is switched off.
- The indicator illuminates green: the system is active.
- Display flashes green: set speed limit exceeded.

## Displays in the Head-up display

The information from the Speed Limiter can also be displayed in the Head-up display.

## Fatigue alert

### Principle

The system can detect decreasing alertness or fatigue of the driver during long, monotonous trips, for instance on highways. In this situation, it is recommended that the driver takes a break.

### Safety information

#### Warning

The system cannot serve as a substitute for the driver's personal judgment in assessing one's physical state. An increasing lack of alertness or fatigue may not be detected or not be detected in time. There is a risk of accident. Make sure that the driver is rested and alert. Adjust driving style to traffic conditions.

### Function

The system is switched on each time the engine is started and cannot be switched off.

After starting the trip, the system is trained to the driver, so that decreasing alertness or fatigue can be detected.

This procedure takes the following criteria into account:

- Personal driving style, for instance steering behavior.
- Driving conditions, for instance time, length of trip.

The system is active starting at approx. 43 mph/70 km/h and can also display a break recommendation.

### Break recommendation

If the driver becomes less alert or fatigued, a message is displayed in the control display with the recommendation to take a break.

A break recommendation is displayed only once during an uninterrupted trip.

After a break, another break recommendation cannot be displayed until after approximately 45 minutes.

### System limits

System functionality may be limited. If the function is limited, either no warning is issued or an incorrect warning is issued. The system function may be limited in the following situations, e.g.:

- If the time is set incorrectly.
- At a predominantly driven speed below approx. 43 mph/70 km/h.
- With a sporty driving style, such as during rapid acceleration or when cornering fast.
- In active driving situations, such as when changing lanes frequently.
- When the road condition is poor.
- In the event of strong side winds.

The system is reset approx. 45 minutes after parking the vehicle, for instance in the case of a break during longer trips on highways.

## PostCrash – iBrake

### Principle

In the event of an accident, the system can bring the vehicle to a halt automatically without intervention by the driver in certain situations. This can reduce the risk of a further collision and the consequences thereof.

## At standstill

After coming to a halt, the brake is released automatically. Secure the vehicle against rolling away.

## Harder vehicle deceleration

In certain situations, it can be necessary to bring the vehicle to a halt more quickly than the automatic braking allows.

To do this, quickly apply extra force to the brake. For a brief period, the brake pressure will be higher than the brake pressure that is achieved by the automatic brake function. This interrupts automatic braking.

## Canceling automatic braking

It can be necessary to interrupt automatic braking in certain situations, for instance for an evasive maneuver.

Cancel automatic braking:

- By depressing the brake pedal.
- By pressing the accelerator pedal.

# Driving stability control systems

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Antilock Braking System

### Principle

The Antilock Braking System prevents locking of the wheels during braking.

The vehicle maintains its steerability even during emergency braking, which increases the active driving safety.

### General information

The Antilock Braking System is ready every time the drive-ready state is turned on.

### Malfunction



The warning light on the instrument cluster illuminates.



A Check Control message is displayed.

- The Antilock Braking System system is not available.
- The ability to steer is restricted during full braking.

Have checked immediately by an authorized service center or another qualified service center or repair shop.

## Brake assistant

When you apply the brake pedal rapidly, this system automatically boosts braking assistance to the furthest possible extent. It reduces the braking distance to a minimum during emergency braking. This system utilizes all of the capabilities provided by the Antilock Braking System.

Do not reduce the pressure on the brake pedal during full braking.

## Energy recovery

### General information

In the event of danger, such as with locked wheels, energy recovery is reduced in order to prevent unstable driving situations.

### Safety information

#### Warning

Without energy recovery, the braking effect of the electric motor is unavailable. The vehicle could roll further than anticipated. There is a risk of accident. Adjust driving style to traffic conditions. Watch surrounding traffic closely and actively intervene where appropriate.

## Dynamic Stability Control

### Principle

Within the physical limits, the system helps to keep the vehicle on a steady course by reducing engine power and by applying brake intervention to the individual wheels.

### General information

The Dynamic Stability Control will detect, e.g., the following unstable driving conditions:

- Skidding, which can lead to oversteering.
- Loss of adhesion of the front wheels, which can lead to understeering.

Dynamic Traction control, refer to page 168, is a version of the Dynamic Stability Control where drive power is optimized.

### Safety information

#### Warning

The system cannot serve as a substitute for the driver's personal judgment in assessing the traffic situation. Based on the limits of the system, it cannot independently react to all traffic situations. There is a risk of accident. Adjust driving style to traffic conditions. Watch the surrounding traffic situation closely, be ready to take over steering and braking at any time, and actively intervene where appropriate.

#### Warning

When driving with a roof load, e.g., roof bars, the vehicle's center of gravity is higher. This increases the risk of the vehicle tipping in critical driving situations. There may be a risk of accidents or risk of

damage to property. Drive with roof load only with activated Dynamic Stability Control.

### Display in the instrument cluster



Warning light flashes: Dynamic Stability Control is regulating the drive and brake power. The vehicle is stabilized. Reduce speed and modify your driving style to the driving circumstances.

Warning light illuminates: Dynamic Stability Control has failed or is initializing. Driving stabilization is restricted or has failed. If the indicator light illuminates continuously, have the vehicle checked immediately by an authorized service center or another qualified service center or repair shop.

### Deactivate Dynamic Stability Control: DSC OFF

#### General information

When Dynamic Stability Control is deactivated, driving stability is limited when accelerating and cornering.

To support driving stability, reactivate Dynamic Stability Control as soon as possible.

#### Deactivating the system



Press and hold this button but not longer than approx. 10 seconds, until the indicator light for DSC OFF illuminates in the instrument cluster and displays DSC OFF.

Dynamic Stability Control is switched off.

#### Activating the system



Press the button.

DSC OFF and the DSC OFF indicator light turn off.

**Displays in the instrument cluster**

If the Dynamic Stability Control is deactivated, DSC OFF is displayed in the instrument cluster.



Indicator light illuminates: Dynamic Stability Control is deactivated.

**Automatic activation**

If Dynamic Stability Control is deactivated, it is automatically activated in the following situations:

- The vehicle has a flat tire.
- When activating cruise control in the TRACTION or DSC OFF settings.

**Dynamic Traction Control**

**Principle**

The Dynamic Traction Control is a variant of the Driving Stability Control where the drive power is optimized.

The system ensures maximum drive power on unusual road conditions, for instance unplowed snow covered roads, or loose road surfaces, but with somewhat limited driving stability.

When the Dynamic Traction Control is activated, there is maximum traction. Driving stability is limited during acceleration and when cornering.

Drive carefully.

A brief activation of the Dynamic Traction Control may be useful in the following exceptional situations:

- When driving in slush or on uncleared, snow-covered roads.
- When driving off from deep snow or loose ground.
- When driving with snow chains.

**Activating/deactivating the Dynamic Traction Control**

**Activating the system**



Press the button.

TRACTION is displayed in the instrument cluster and the indicator light for DSC OFF illuminates.

**Deactivating the system**



Press the button again.

TRACTION and the DSC OFF indicator light turn off.

**MINI Driving Modes switch**


**Principle**

The MINI Driving Modes switch helps to fine-tune the vehicle's settings and features.

Choose between four different programs.

Pressing the MINI Driving Modes switch will activate the particular program.

**Operating the programs**

Switch	Program
	SPORT
	MID
	GREEN
	GREEN+



## MID

MID provides a balanced setting.

With each starting procedure, MID is activated using the Start/Stop button.

## GREEN

### Principle

GREEN provides an energy-efficient balance for increased range.

### Activating GREEN

Press the MINI Driving Modes switch upward or downward until GREEN is displayed in the instrument cluster.


### Configuring GREEN

#### Via MINI Driving Modes switch

1. Activate GREEN.
2. "Configure GREEN"
3. Configure the program.

This configuration is retrieved when GREEN is activated.

#### Via the Central Information Display (CID)

1.  "My MINI"
2. "Vehicle settings"
3. If necessary, "Driving mode"
4. "Configure GREEN"
5. Select the desired setting.

This configuration is retrieved when GREEN is activated.

## GREEN+

### Principle

GREEN provides an energy-efficient balance for maximum range.

During the activation, some comfort functions will also be limited or deactivated.

### Activating GREEN+

Press the MINI Driving Modes switch upward or downward until GREEN+ is displayed in the instrument cluster.

## SPORT

### Principle

Consistently sporty setting of the drivetrain for greater driving agility.

### Activating SPORT

Press the MINI Driving Modes switch upward or downward until SPORT is displayed in the instrument cluster.


### Configuring driving program

Settings can be made for the following driving programs in Drive mode:

- GREEN, refer to page 169.


## Displays

### Program selection



Pressing the MINI Driving Modes switch displays a list of programs, which can be selected.

### Selected program



The instrument cluster displays the selected program.

## Drive-off assistant

---

### Principle

This system supports driving off on uphill grades. The parking brake is not required.

### Driving off with the drive-off assistant

1. Hold the vehicle in place with the foot brake.
2. Release the foot brake and drive off without delay.

After the foot brake is released, the vehicle is held in place for approx. 2 seconds.

## Servotronic

---

Servotronic is a speed-dependent power steering function.

The system provides the steering force with more support at low speeds than at higher ones. This makes it easier to park, for instance, and makes steering firmer when driving at faster speeds.

Furthermore, the steering force adapts according to the driving program, so that a firm, sporty feel or a comfortable steering response is conveyed.

# Driving comfort

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Camera-based cruise control

### Principle

Using this system, a set speed and a distance to a vehicle ahead can be adjusted using the buttons on the steering wheel.

The system maintains the set speed on clear roads. The vehicle accelerates or brakes automatically.

If a vehicle is driving ahead of you, the system adjusts the speed of the vehicle so that the set distance to the vehicle ahead is maintained. The speed is adjusted as far as the given situation allows.

The distance can be adjusted at several levels. For safety reasons, it depends on the respective speed.

If the vehicle ahead of you brakes to a halt, and then proceeds to drive again within a brief period, the system is able to detect this within the given system limits.

### General information

A camera on the interior mirror is used to detect vehicles driving ahead.

Depending on the vehicle settings, the cruise control settings may change under certain conditions.

## Safety information

### Warning

The system cannot serve as a substitute for the driver's personal judgment in assessing the traffic situation. Based on the limits of the system, it cannot independently react to all traffic situations. There is a risk of accident. Adjust driving style to traffic conditions. Watch the surrounding traffic situation closely, be ready to take over steering and braking at any time, and actively intervene where appropriate.

### Warning

The set speed can be incorrectly adjusted or called up by mistake. There is a risk of accident. Adjust the set speed to the traffic conditions. Watch surrounding traffic closely and actively intervene where appropriate.

### Warning

Risk of accident is greater when there is a high speed differential to other vehicles, for instance in the following situations:

- When approaching a slowly moving vehicle at speed.
- Vehicle suddenly swerving into own lane.
- When approaching stationary vehicles at speed.

There is a risk of injury or danger to life. Watch surrounding traffic closely and actively intervene where appropriate.

**Warning**

An unsecured vehicle can begin to move and possibly roll away. There is a risk of accident. Before leaving the vehicle, secure the vehicle against rolling away.

In order to ensure that the vehicle is secured against rolling away, follow the following:



- Set the parking brake.
- On uphill grades or on downhill slopes, turn the front wheels in the direction of the curb.
- On uphill grades or on downhill slopes, also secure the vehicle, for instance with a wheel chock.





**Warning**

When towing with Intelligent Safety systems enabled or Cruise Control switched on, individual functions may not work correctly. There is a risk of accident. Switch off all Intelligent Safety systems and Cruise Control before towing.

**Overview**


**Buttons on the steering wheel**

Button	Function
	Cruise control on/off, refer to page 173.
	Interrupt cruise control, refer to page 173. Continue cruise control with the last setting, refer to page 174.

Button	Function
	Reduce distance, refer to page 174.
	Increase the distance, refer to page 174.
	Increase speed, refer to page 173.
	Reduce speed, refer to page 173.

Buttons are arranged according to vehicle's series, optional features and country specifications.

**Camera**

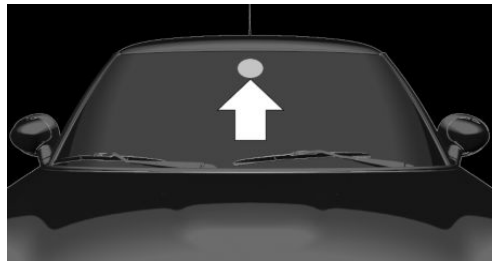

The camera is installed near the interior mirror.

Keep the windshield in front of the interior mirror clean and clear.

**Functional requirements**

The system is best used on well-maintained roads.

The system is functional at speeds beginning at approx. 20 mph/30 km/h.

The system can also be activated when stationary.

The max. speed that can be set is 85 mph/140 km/h.

If distance control is switched off, refer to page 174, higher desired speeds can be selected as well.

## Turning on/off and interrupting cruise control

### Turning on



Press the button on the steering wheel.



Display in the instrument cluster illuminates. The current speed is adopted as desired speed and displayed with icon.

Cruise control is active and maintains the set speed.

If necessary, the Dynamic Stability Control will be turned on.

### Turning off

To switch off the system while stationary, step on brake pedal at the same time.



Press the button on the steering wheel.

The displays turn off. The stored set speed is deleted.

### Interrupting manually



Press the button on the steering wheel.

When interrupting at a standstill, step on brake pedal at the same time.

### Interrupting automatically

The system is automatically interrupted in the following situations:

- When braking manually.
- When selector lever position D is disengaged.
- When Dynamic Traction Control is activated or Dynamic Stability Control is deactivated.
- If Dynamic Stability Control regulates the driving stability.
- If the detection range of the camera is impaired, for instance by contamination, heavy precipitation or blinding glare from the sun.
- After a stationary period of approx. 3 seconds when the vehicle has been braked to a stop by the system.

## Adjusting the speed

### Maintaining/storing the speed

Press  or  button in the interrupted state.

When the system is switched on, the current speed is maintained and stored as the set speed.





Instrument cluster with enhanced features:



The stored speed is displayed.

If necessary, the Dynamic Stability Control will be turned on.



### Changing the speed

 or  button: press until the desired speed is set.

If active, the displayed speed is stored and the vehicle reaches the stored speed when the road is clear.

-  or  button: each time it is pressed to the point of resistance, the

desired speed increases or decreases by approx. 1 mph/1 km/h.

-  or  button: each time it is pressed past the resistance point, the desired speed changes by a maximum of 5 mph/10 km/h.

 or  button: hold down to repeat the action.

## Adjusting the distance

### Safety information

#### Warning

The system cannot serve as a substitute for the driver's personal judgment. Due to the system limits, deceleration can be late. There may be a risk of accidents or risk of damage to property. Be aware to the surrounding traffic situation at all times. Adjust the distance to the traffic and weather conditions and maintain the prescribed safety distance, possibly by braking.

### Reducing the distance



Press the button repeatedly until the desired distance is set.

### Increasing the distance



Press the button repeatedly until the desired distance is set.

## Continuing cruise control

### General information

An interrupted cruise control can be continued by calling up the stored speed.

Make sure that the difference between current speed and stored speed is not too large before calling up the stored speed. Other-

wise, unwanted vehicle deceleration or acceleration may occur.

In the following cases, the stored speed value is deleted and cannot be called up again:

- When the system is switched off.
- When drive-ready state is switched off.

## Calling up the stored speed and distance



Press the button with the system interrupted. Cruise control is continued with the stored values. The instrument cluster briefly displays the selected distance.

## Switching distance control on/off

### Safety information

#### Warning

The system does not react to traffic driving ahead of you, but instead maintains the stored speed. There may be a risk of accidents or risk of damage to property. Adjust the set speed to the traffic conditions and brake as needed.

## Switching distance control off

Distance control can be switched off and on when driving with cruise control activated.



Press and hold this button.

Or:



Press and hold this button.



The indicator light in the instrument cluster illuminates.

To switch distance control back on, press one of the two buttons again briefly.

After changing over distance control, a Check Control message is displayed.

## Displays in the instrument cluster

### Set speed and stored speed







Instrument cluster with enhanced features:

- Display illuminates green: system is active, the display indicates the desired speed.
- Speed value is illuminated gray: system is interrupted.
- No display: system is switched off.

If no speed is indicated, it is possible that the conditions necessary for operation are not currently fulfilled.

### Distance to vehicle ahead of you

Distance display	
	Distance 1
	Distance 2
	Distance 3
	Distance 4
	This value is set automatically after the system is switched on.

### Detected vehicle





Instrument cluster with enhanced features:

Vehicle icon is displayed: Vehicle has been detected ahead of you.



Rolling bars: the detected vehicle has driven away.

The system does not accelerate. To accelerate, activate the system as follows:

- By briefly pressing the accelerator pedal.
- By pressing the RES CNCL button.
- By pressing the  or  button.

### Indicator lights and warning lights



Instrument cluster with enhanced features:

Vehicle icon flashes.

Conditions are not adequate for the system to work.

The system was deactivated but applies the brakes until you actively resume control by pressing on the brake pedal or accelerator pedal.



Warning light flashes red and acoustic signal sounds:

Brake and make an evasive maneuver, if necessary.



System interrupted without detected vehicle.




System interrupted with detected vehicle.

## Displays in the Head-up display

The information from Active Cruise Control can also be displayed in the Head-up display.

## System limits

### Detection range

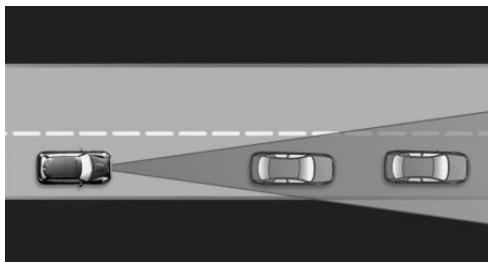

The detection capability of the system and the automatic braking performance are limited.


For instance, two-wheeled vehicles may not be detected.

### Deceleration

The system does not decelerate in the following situations:

- For pedestrians, cyclists or similarly slow-moving road users.
- For red traffic lights.
- For cross traffic.
- For oncoming traffic.
- Unlit vehicles or vehicles with faulty lighting at night.


## Merging vehicles

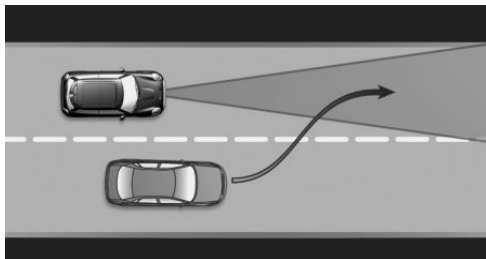

A vehicle driving in front of you is not detected until it is completely within the same lane as your vehicle.

If a vehicle driving ahead of you suddenly merges into your lane, the system may not be able to automatically restore the selected distance. It may not be possible to restore the selected distance in certain situations, including if you are driving significantly faster than vehicles driving ahead of you, for instance when rapidly approaching a truck. When a vehicle driving ahead of you is reliably detected, the system requests that the driver intervene by braking and carrying out evasive maneuvers, if needed.

## Cornering

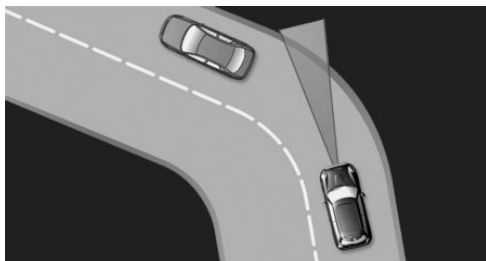

When the set speed is too high for a curve, the speed is reduced slightly. Because curves may not be anticipated in advance, drive into a curve at an appropriate speed.

The system has a limited detection range. Situations can arise in tight curves where a



vehicle driving ahead will not be detected or will be detected very late.



When you approach a curve the system may briefly report vehicles in the next lane due to the bend of the curve. If the system decelerates you may compensate for it by briefly accelerating. After releasing the accelerator pedal the system is reactivated and controls speed independently.

### Weather

The following restrictions can occur under unfavorable weather or light conditions:

- Poorer vehicle detection.
- Short-term interruptions for vehicles that are already recognized.

Examples of unfavorable weather or light conditions:

- Wet conditions.
- Snowfall.
- Slush.
- Fog.
- Glare.

Drive attentively, and react to the current surrounding traffic situation. If necessary, intervene actively, for instance by braking, steering or evading.

### Engine power

The desired speed may not be maintained on uphill grades if engine power is insufficient.

### Malfunction

A Check Control message is displayed if the system has malfunctioned or was automatically deactivated.

The system may be limited in the following situations:

- When an object was not correctly detected.
- In heavy fog, wet conditions, or snowfall.
- On tight curves.
- If the camera field of view or the windshield is dirty or covered.
- When driving toward bright lights.
- Up to 20 seconds after drive-ready state is switched on via the Start/Stop button.
- During calibration of the camera immediately after vehicle delivery.

## Cruise Control

### Principle

Using this system, a set speed can be adjusted using the buttons on the steering wheel. The system maintains the set speed. The system accelerates and brakes automatically as needed.

### General information

The system is functional at speeds beginning at approx. 20 mph/30 km/h.

Depending on the vehicle settings, the cruise control settings may change under certain conditions.

## Safety information

### Warning

The system cannot serve as a substitute for the driver's personal judgment in assessing the traffic situation. Based on the limits of the system, it cannot independently react to all traffic situations. There is a risk of accident. Adjust driving style to traffic conditions. Watch the surrounding traffic situation closely, be ready to take over steering and braking at any time, and actively intervene where appropriate.

### Warning

The use of the system can lead to an increased risk of accidents in the following situations, for instance:

- On winding roads.
- With high traffic volume.
- On slippery roads, in fog, snow, or wet conditions, or on a loose road surface.





There may be a risk of accidents or risk of damage to property. Only use the system if driving at constant speed is possible.

### Warning

When towing with Intelligent Safety systems enabled or Cruise Control switched on, individual functions may not work correctly. There is a risk of accident. Switch off all Intelligent Safety systems and Cruise Control before towing.

## Overview


### Buttons on the steering wheel

Button	Function
	Cruise control on/off, refer to page 178.
	Interrupt cruise control, refer to page 178. Continue cruise control with the last setting, refer to page 179.
	Increase speed, refer to page 179.
	Reduce speed, refer to page 179.

### Turning on/off and interrupting cruise control

#### Turning on

 Press the button on the steering wheel.

 Display in the instrument cluster illuminates. The current speed is adopted as the speed limit.

Cruise control is active and maintains the set speed.

If necessary, the Dynamic Stability Control will be turned on.

#### Turning off

 Press the button on the steering wheel.

The displays turn off. The stored set speed is deleted.

## Interrupting manually



When active, press the button on the steering wheel.

## Interrupting automatically

The system is automatically interrupted in the following situations:

- When braking manually.
- When selector lever position D is disengaged.
- When Dynamic Traction Control is activated or Dynamic Stability Control is deactivated.
- If Dynamic Stability Control regulates the driving stability.

## Adjusting the speed

### Maintaining/storing the speed



Press  or  button in the interrupted state.

When the system is switched on, the current speed is maintained and stored as the set speed.





The stored speed is displayed in the instrument cluster.

If necessary, the Dynamic Stability Control will be turned on.



### Changing the speed

 or  button: press until the desired speed is set.

If active, the displayed speed is stored and the vehicle reaches the stored speed when the road is clear.

-  or  button: each time it is pressed to the point of resistance, the desired speed increases or decreases by approx. 1 mph/1 km/h.
-  or  button: each time it is pressed past the resistance point, the

desired speed changes by a maximum of 5 mph/10 km/h.

-  or  button: press button to resistance point and hold. The vehicle accelerates or decelerates without pressure on the accelerator pedal. After the rocker switch is released, the vehicle maintains its final speed. Pressing the switch beyond the resistance point causes the vehicle to accelerate more rapidly.

## Continuing cruise control

### General information

An interrupted cruise control can be continued by calling up the stored speed.

Make sure that the difference between current speed and stored speed is not too large before calling up the stored speed. Otherwise, unwanted vehicle deceleration or acceleration may occur.

### Calling up the stored speed



Press the button on the steering wheel.

The stored speed is reached again and maintained.

## Displays in the instrument cluster

### Indicator light



The indicator in the instrument cluster illuminates: the system is switched on.



## Set speed and stored speed



The desired speed is displayed together with the icon.

- Display illuminates green: system is active, the display indicates the desired speed.
- Display illuminates gray: system is interrupted, the display indicates the stored speed.
- No display: system is switched off.

## System limits

### Engine power

The set speed is also maintained downhill, but may not be maintained on uphill grades if engine power is insufficient.

## Park Distance Control

### Principle

Park Distance Control assists with parking. The system detects objects behind the vehicle. If equipped with Park Distance Control in the front, objects in front of the vehicle are also detected. Objects that you are approaching slowly are indicated by signal tones and a visual display.

### General information

The ultrasound sensors for measuring the distances are located in the bumpers.

The range, depending on obstacles and environmental conditions, is approx. 6 ft/2 m.

An acoustic warning is first given in the following situations:

- By the front middle sensors and the two corner sensors at approx. 24 in/60 cm from the object.
- By the rear middle sensors at approx. 5 ft/1.50 m from the object.
- When a collision is imminent.

## Safety information

### Warning


The system cannot serve as a substitute for the driver's personal judgment in assessing the traffic situation. Based on the limits of the system, it cannot independently react to all traffic situations. There is a risk of accident. Adjust driving style to traffic conditions. Check surrounding traffic and vehicle's surroundings closely and actively intervene where appropriate.

### Warning

Due to high speeds when the Park Distance Control is activated, the warning can be delayed due to physical circumstances. There is a risk of injury or risk of damage to property. Avoid approaching an object too fast. Avoid driving off quickly while Park Distance Control is not yet active.


## Overview

### With front Park Distance Control: button in the vehicle

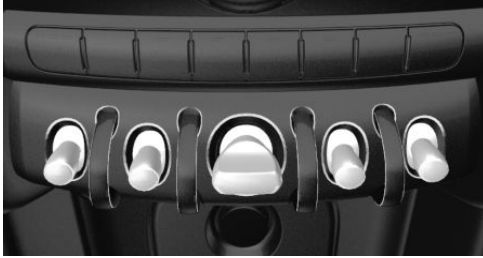

Park assistance button

### Ultrasonic sensors



Ultrasonic sensors of the Park Distance Control, in the bumpers, for example.

## Functional requirements

Ensure full operability:

- Do not cover sensors, for instance with stickers, bicycle racks or similar.
- Keep the sensors clean and free of ice.

## Turning on/off


### Turning on automatically

The system switches on automatically in the following situations:

- If selector lever position R is engaged while drive-ready state is switched on. The rearview camera also switches on.
- With front Park Distance Control: when obstacles are detected behind or in front of the vehicle by Park Distance Control

and the speed is slower than approx. 2.5 mph/4 km/h.

With front Park Distance Control: automatic activation when obstacles are detected can be switched off. Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. "Parking"
4. "Automatic PDC Activation": depending on the vehicle equipment.
5. "Automatic PDC Activation"

The setting is stored for the driver profile currently used.

### Automatic deactivation during forward travel

The system switches off when a certain driving distance or speed is exceeded. Switch the system back on, if needed.

### With front Park Distance Control: switch on/off manually



Press the park assistance button.

- On: the LED illuminates.
- Off: the LED goes out.

The rearview camera image is displayed if the reverse gear is engaged when pressing the park assistance button.

Depending on the equipment version, the system cannot be switched off manually if the reverse gear is engaged.

## Warning

### Signal tones

An intermittent tone indicates when the vehicle is approaching an object. E.g., when an object is detected at the rear left of the



vehicle, a signal tone sounds from the rear left speaker.


The shorter the distance to the object, the shorter the intervals.

When the distance to a detected object is less than approx. 10 inches/25 cm, a continuous tone is sounded.

With front Park Distance Control: when objects are simultaneously located both in front of and behind the vehicle, an alternating continuous signal is sounded.

## Volume

The ratio of the volume of the Park Distance Control signal tone to the entertainment volume can be adjusted.

1.  "My MINI"
2. "System settings"
3. "Tone"
4. "Volume settings"
5. "PDC"
6. Set the desired value.

The setting is stored for the driver profile currently used.

## Visual warning

The approach of the vehicle to an object can be shown on the control display. Objects that are farther away are already displayed on the control display before a signal sounds.

The display appears as soon as Park Distance Control is activated.

The detection range of the sensors is represented in colors: red, green and yellow.

When the image of the rearview camera is displayed, it is possible to switch to Park Distance Control:

 "Rear view camera"

## System limits

### Safety information

#### Warning

Due to its limits, the system may not react, or it may react too late or in a manner that is not consistent with normal use. There may be a risk of accidents or risk of damage to property. Actively intervene as warranted. Refer to the information in this Owner's Manual regarding the scope of the system's operation and limitations.

### Limits of ultrasonic measurement

The detection of objects with ultrasonic measurements can run into physical limits, for instance under the following conditions:

- For small children and animals.
- For persons with certain clothing, for instance jacket.
- With external fault of the ultrasound, for instance from passing vehicles or loud machines.
- When sensors are dirty, iced over, damaged or out of position.
- If cargo protrudes.
- Under certain weather conditions such as high moisture, wet conditions, snowfall, extreme heat, or strong wind.
- With tow bars and trailer couplings of other vehicles.
- With thin or wedge-shaped objects.
- With moving objects.
- With elevated, protruding objects such as ledges or cargo.
- With objects with corners and sharp edges.
- With objects with a fine surface structure such as fences.

- For objects with porous surfaces.
- Low objects already displayed, for instance curbs, can move into the blind area of the sensors before or after a continuous tone sounds.

### Unwarranted warnings

The system may issue a warning under the following conditions even though there is no obstacle within the detection range:

- In heavy rain.
- When sensors are very contaminated or covered with ice.
- When sensors are covered in snow.
- On rough road surfaces.
- On uneven surfaces, such as speed bumps.
- In large buildings with right angles and smooth walls, for instance in underground garages.
- In automatic car washes.
- Due to heavy exhaust.
- Due to other ultrasound sources, for instance sweeping machines, steam cleaners or neon lights.

The malfunction is signaled by a continuous tone alternating between the front and rear speakers. As soon as the malfunction due to other ultrasound sources is no longer present, the system is again fully functional.

With front Park Distance Control: to reduce unwarranted warnings, switch off automatic Park Distance Control activation on obstacle detection, for instance in car washes, see Switching on/off.

### Malfunction

A Check Control message is displayed in the instrument cluster.



Red icon is displayed, and the detection range of the sensors is dimmed on the control display.

Park Distance Control malfunction. Have the vehicle checked by an authorized service center or another qualified service center or repair shop.

## Rearview camera

### Principle

The rearview camera provides assistance in reverse parking and maneuvering. The area behind the vehicle is shown on the control display.

### Safety information

#### Warning

The system cannot serve as a substitute for the driver's personal judgment in assessing the traffic situation. Based on the limits of the system, it cannot independently react to all traffic situations. There is a risk of accident. Adjust driving style to traffic conditions. Check surrounding traffic and vehicle's surroundings closely and actively intervene where appropriate.

## Overview

Depending on the vehicle equipment:  
button in the vehicle



 Park assistance button

## Camera



The camera lens is located in the handle of the tailgate.

The image quality may be impaired by dirt. If necessary, clean the camera lens.

## Turning on/off

### Turning on automatically


The system is automatically switched on if selector lever position R is engaged when the drive-ready state is switched on.

### Automatic deactivation during forward travel

The system switches off when a certain driving distance or speed is exceeded.

Switch the system back on, if needed.

### Depending on the vehicle equipment: switching on/off manually

 Press the park assistance button.

- On: the LED illuminates.
- Off: the LED goes out.

The parking assistance functions are shown on the control display.

### Switching the view via the Central Information Display (CID)

If the rearview camera view is not displayed, change the view via the Central Information Display (CID):

 "Rear view camera"

The rearview camera image is displayed.

## Display on the control display



### Functional requirements

- The rearview camera is switched on.
- The tailgate is fully closed.
- Keep the detection range of the camera open.

Protruding cargo or rear-mounted luggage rack that are not connected to a trailer power socket can lead to malfunctions.

### Activating assistance functions


More than one assistance function can be active at the same time.

- Parking aid lines  
 "Parking aid lines"  
Lanes and turning circle lines are indicated.
- Obstacle marking  
 "Obstacle marking"



Obstacles are marked, depending on the vehicle equipment.

### Pathway lines

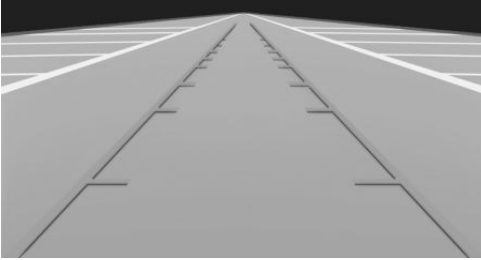


Pathway lines can be superimposed on the rearview camera image.

Pathway lines help you to estimate the space required when parking and maneuvering on level roads.

Pathway lines depend on the current steering wheel angle and are continuously adjusted to steering movements.

### Turning circle lines

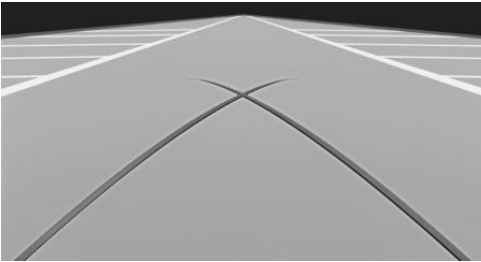


Turning circle lines can be superimposed on the image of the rearview camera.

Turning circle lines show the course of the smallest possible turning radius on a level road.

Only one turning circle line is displayed after the steering wheel is turned past a certain angle.

### Obstacle marking

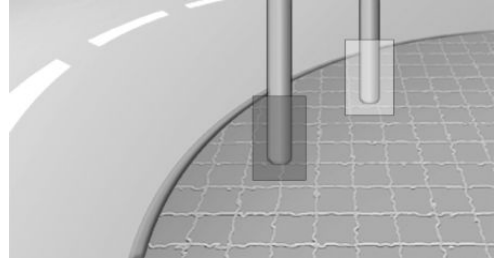


Depending on the vehicle equipment, obstacle markings can be faded into the image of the rearview camera.


The colored steps of the obstacle markings match the marks of the Park Distance Control.

## Parking using lanes and turning circle lines

1. Position the vehicle so that the turning circle lines lead to within the limits of the parking space.

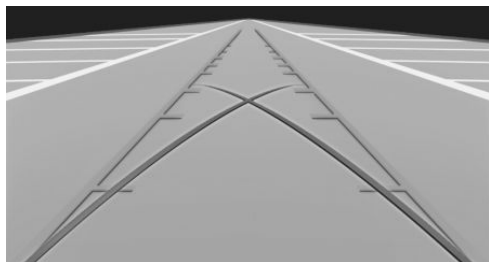

2. Turn the steering wheel to the point where the pathway line covers the corresponding turning circle line.

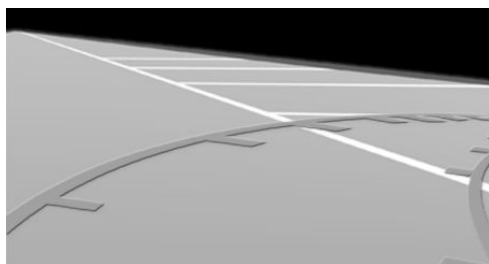

## Display settings

### Brightness

With the rearview camera switched on:

1. ☀ Select the icon.
2. Turn the Controller until the desired setting is reached and press the Controller.

### Contrast

With the rearview camera switched on:

1. 🎛 Select the icon.
2. Turn the Controller until the desired setting is reached and press the Controller.

## System limits

### Detection of objects

Very low obstacles or high, protruding objects such as ledges may not be recognized by the system.


Depending on the equipment, some assistance functions also take into account data from the Park Distance Control.

Follow the notes in the Park Distance Control chapter.

The objects displayed on the control display may be closer than they appear. Therefore, do not estimate the distance from the objects on the display.

## Automatic Parking Assistant

### Principle

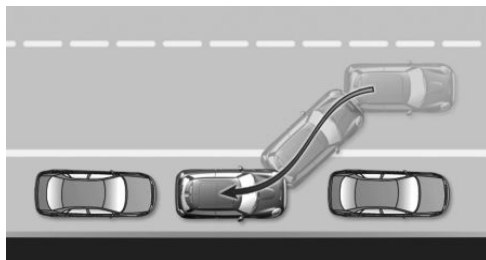

This system assists the driver in parking parallel to the road.

### General information

Automatic Parking Assistant handling is divided into three steps:

- Switching on and activating.
- Parking space search.
- Parking.

Ultrasonic sensors measure parking spaces on both sides of the vehicle.

The Automatic Parking Assistant calculates the best possible parking line and takes control of steering during the parking operation.

System status and instructions on required actions are displayed on the control display. A component of the Automatic Parking Assistant is Park Distance Control.

## Safety information

### Warning

The system cannot serve as a substitute for the driver's personal judgment in assessing the traffic situation. Based on the limits of the system, it cannot independently react to all traffic situations. There is a risk of accident. Adjust driving style to traffic conditions. Check surrounding traffic and vehicle's surroundings closely and actively intervene where appropriate.

### Warning

The system can steer the vehicle over or onto curbs. There is a risk of injury or risk of damage to property. Watch surrounding traffic closely and actively intervene where appropriate.

In addition, the safety instructions of the Park Distance Control apply.

## Overview

### Button in the vehicle



 Park assistance button

### Ultrasonic sensors



The ultrasound sensors for measuring parking spaces are located on the wheel housing.

## Functional requirements

### Ultrasonic sensors

Ensure full operability:

- Do not cover sensors, for instance with stickers.
- Keep the sensors clean and unobstructed.

### For the measurement of parking spaces

- Maximum speed while driving forward approx. 22 mph/35 km/h.
- Maximum distance to row of parked vehicles: 5 ft/1.5 m.

### Suitable parking space


- Gaps behind an object that has a min. length of 5 ft/1.5 m.
- Gap between two objects with a minimum length of approx. 5 ft/1.5 m.
- Minimum length of gap between two objects: own vehicle length plus approx. 3.3 ft/1.0 m.
- Minimum depth: approx. 5 ft/1.5 m.

### For the parking operation


- Doors and tailgate are closed.
- The parking brake is released.
- When parking in parking spaces on the driver's side, the corresponding turn signal must be switched on.

## Switching on and activating

### Switching on with the button

-  Press the park assistance button. The LED illuminates.


The current status of the parking space search is indicated on the control display.

-  Automatic Parking Assistant is activated automatically.

### Switching on with reverse gear



Shift into reverse.

The current status of the parking space search is indicated on the control display.


- To activate:  "Parking Assistant"


## Display on the control display

### System activated/deactivated

Icon	Meaning
	Gray: the system is not available. White: the system is available but not activated.
	The system is activated.


### Parking space search and system status

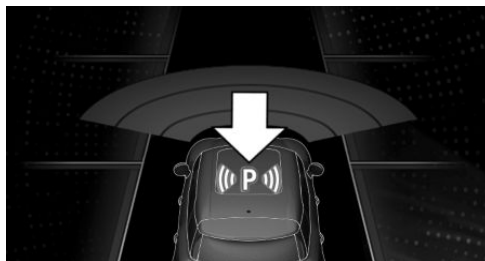


- Icon P on the vehicle image: the Automatic Parking Assistant is activated and the parking space search is active.
- Control display shows suitable parking spaces at the edge of the road next to the vehicle icon. When the Automatic Parking Assistant is active, suitable parking spaces are highlighted.
-  The parking operation is active. The system takes over the steering.
- Parking space search is always active whenever the vehicle is moving forward slow and straight, even if the system is deactivated. When the system is deactivated, the displays on the control display are shown in gray.

## Parking using the Automatic Parking Assistant

### Parking

1.  Press the park assistance button or shift into reverse gear to switch on the Automatic Parking Assistant, refer to page 188. Activate the Automatic Parking Assistant, if needed.
 

 Automatic Parking Assistant is activated.
2. Pass the row of parked vehicles at a speed of up to approx. 22 mph/35 km/h and at a distance of maximum 5 ft/1.5 m.
 

The status of the parking space search and possible parking spaces are displayed on the control display, refer to page 188.
3. Follow the instructions on the control display.
 



The Automatic Parking Assistant takes control of steering during the parking operation. The driver takes over braking and accelerating.

The best possible parking position will come after gear change on the stationary vehicle - wait for the automatic steering operation.

The end of the parking operation is indicated on the control display.
4. Adjust the parking position yourself, if needed.

### Canceling manually

The Automatic Parking Assistant can be interrupted at any time:

-  Press the park assistance button.
-  "Parking Assistant"

### Canceling automatically

The system is interrupted automatically in the following situations:

- If the driver grasps the steering wheel or takes over steering.
- If a gear is selected that does not match the instruction on the control display.
- If the vehicle speed exceeds approx. 6 mph/10 km/h.
- Possibly on snow-covered or slippery road.
- If a maximum number of parking attempts or the time taken for parking is exceeded.
- If Park Distance Control displays clearances that are too small.
- When changing over to other functions of the radio.

A Check Control message is displayed.

### Resuming

An interrupted parking operation can be continued, if needed.

Reactivate the Automatic Parking Assistant, refer to page 188, and follow the instructions on the control display.

### Turning off

The system can be switched off as follows:

-  Press the park assistance button.

### System limits

#### Safety information

##### Warning

Due to its limits, the system may not react, or it may react too late or in a manner that is not consistent with normal use. There may be a risk of accidents or risk



of damage to property. Actively intervene as warranted. Refer to the information in this Owner's Manual regarding the scope of the system's operation and limitations.

### No parking assistance

The Automatic Parking Assistant does not offer assistance in the following situations:

- On tight curves.

### Functional limitations

The system may be limited in the following situations:

- On bumpy road surfaces such as gravel roads.
- On slippery ground.
- With accumulations of leaves/snow in the parking space.
- With a mounted emergency wheel.
- With ditches or edges, for instance an edge of a port.

### Limits of ultrasonic measurement

The detection of objects with ultrasonic measurements can run into physical limits, for instance under the following conditions:

- For small children and animals.
- For persons with certain clothing, for instance jacket.
- With external fault of the ultrasound, for instance from passing vehicles or loud machines.
- When sensors are dirty, iced over, damaged or out of position.
- If cargo protrudes.
- Under certain weather conditions such as high moisture, wet conditions, snowfall, extreme heat, or strong wind.
- With tow bars and trailer couplings of other vehicles.

- With thin or wedge-shaped objects.
- With moving objects.
- With elevated, protruding objects such as ledges or cargo.
- With objects with corners and sharp edges.
- With objects with a fine surface structure such as fences.
- For objects with porous surfaces.
- Low objects already displayed, for instance curbs, can move into the blind area of the sensors before or after a continuous tone sounds.
- The parking assistant may identify parking spaces that are not suitable for parking.

### Tire size

The parking position may vary depending on the tire size.

### Malfunction

A Check Control message is displayed.

The Automatic Parking Assistant has malfunctioned. Have the vehicle checked by an authorized service center or another qualified service center or repair shop.

# Climate control

## Vehicle features and options

---

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

- Emission tested passenger compartment.
- Microfilter.
- Air conditioning system to control the temperature, air flow and recirculated-air mode.

Depending on the equipment specification:


- Microfilter/activated-charcoal filter.
- Automatic climate control.
- Stationary climate control.

## Interior air quality

---

The air quality in the vehicle is improved by the following components:

## Automatic climate control

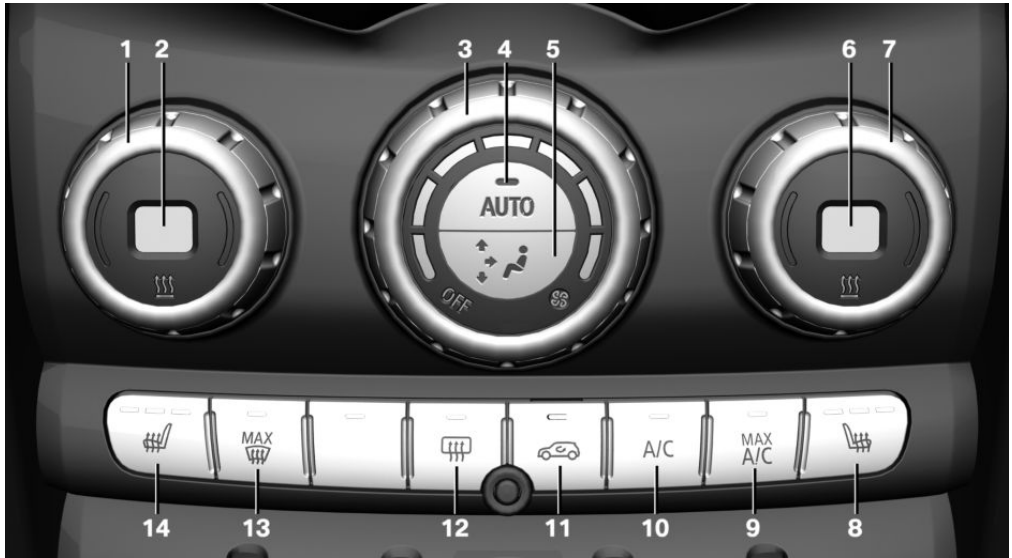

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>1 Temperature, left</li> <li>2 Display</li> <li>3 Air flow, AUTO intensity</li> <li>4 AUTO program</li> <li>5 Air distribution, manual</li> <li>6 Display</li> <li>7 Temperature, right</li> <li>8 Seat heating, right <a href="#">86</a></li> </ul> | <ul style="list-style-type: none"> <li>9 Maximum cooling</li> <li>10 Air conditioning</li> <li>11 Air recirculation mode</li> <li>12 Rear window defroster</li> <li>13 To defrost windows and remove condensation</li> <li>14 Seat heating, left <a href="#">86</a></li> </ul> |
|---|--|

## Climate control functions in detail

### Switching the system on/off

#### Turning on

Set any air flow.

#### Turning off



Turn wheel for air flow to the left until the control panel switches off.

## Temperature

### Principle

The automatic climate control achieves the set temperature as quickly as possible, if



necessary by using the maximum cooling or heater output, and then keeps it constant.

### Adjusting



Turn the wheel to set the desired temperature.

Do not rapidly change between different temperature settings. The automatic climate control will not have sufficient time to adjust the set temperature.

### Air conditioning

#### Principle

The air in the interior will be cooled and dehumidified and, depending on the temperature setting, warmed again.

#### Functional requirement

The car's interior can be cooled with activated drive-ready or standby state.

#### Turning on/off



Press the button.

The LED is illuminated with air conditioning switched on.

Depending on the weather, the windshield may fog up briefly when drive-ready state is switched on.

Air conditioning is switched on automatically with the AUTO program.

The cooling mode produces condensation, refer to page [220](#), that will exit from below the vehicle.

### Maximum cooling

#### Principle

The system is set to the lowest temperature, maximum air flow and recirculated-air mode.

#### Functional requirement

The function is available at an outside temperature above approx. 32 °F/0 °C and with the drive-ready state switched on.

#### Turning on/off



Press the button.

The LED is illuminated with the system switched on.

Air flows out of the air vents to the upper body area. The air vents need to be open for this.

The air flow can be adjusted when maximum cooling is switched on.

### AUTO program

#### Principle

The AUTO program cools, ventilates or heats the car's interior automatically.

For this, the air flow, air distribution and temperature are regulated depending on the settings and the interior temperature.

#### Turning on/off



Press the button.

The LED is illuminated with the AUTO program switched on.

Depending on the selected temperature, AUTO intensity and outside influences, the air is directed to the windshield, side windows, upper body, and into the floor area.

Point the side air vents toward the side windows.

The following features are switched on automatically with the AUTO program:

- Air conditioning, refer to page 193.

To switch off the program: press the button again or manually adjust the air distribution.

### Adjusting the intensity of the air flow

With the AUTO program switched on, the intensity can be adjusted. This changes the automatic control for the air mass.



Turn the wheel to set the desired intensity from soft to intensive.

The set intensity is displayed via the position of the illuminated LED segment.

### Air recirculation mode

#### Principle

You may react to unpleasant odors or pollutants in the immediate environment by temporarily suspending the supply of outside air. The system then recirculates the interior air.

#### Operation



Press the button:

The LED is illuminated when recirculated-air mode is switched on. The supply of outside air is shut off.

When recirculated-air mode is switched off, fresh air is directed into the vehicle's interior.

To prevent window condensation, recirculated-air mode switches off automatically after a certain amount of time, depending on the outside temperature.

With extended air recirculation mode, the air quality in the interior deteriorates and window fogging increases.

In case of window condensation, switch off air recirculation mode and increase the air flow, if needed.

### Air flow, manual

#### Principle

The air flow for climate control can be adjusted manually.

#### General information

To adjust the air flow manually switch off AUTO program first.

#### Adjusting



Turn the ring to set the desired air flow.

The manually adjusted air flow is displayed via illuminated LED segments.

The air flow of the automatic climate control may be reduced to save vehicle battery power.

### Manual air distribution

#### Principle

The air distribution for climate control can be adjusted manually.

#### Adjusting



Press the button repeatedly to select a program:

- Windows, upper body area, and footwell.
- Upper body area and footwell.
- Footwell.

- Windows and footwell.
- Windows.
- Windows and upper body area.
- Upper body area.

## To defrost windows and remove condensation

### Principle

Ice and condensation are quickly removed from the windshield and the front side windows.

### Turning on/off



Press the button.

The LED is illuminated with the system switched on.

The air flow can be adjusted with the program active.

If there is window condensation, switch on the air conditioning as well.

### Rear window defroster



Press the button. The LED illuminates.

The rear window defroster switches off automatically after a certain period of time.

When GREEN driving mode is activated, the heater output is reduced.

### Microfilter/activated-charcoal filter

In external and recirculated-air mode, the microfilter/activated-charcoal filter filters dust, pollen, and gaseous pollutants out of the air.

Have this filter changed during vehicle maintenance, refer to page [261](#).

## Ventilation

### Setting

The air flow directions can be individually adjusted:

- Direct ventilation:

The air flow is directly pointed onto the person. The air flow heats or cools noticeably, depending on the adjusted temperature.

- Indirect ventilation:

If the air vents are fully or partly closed, the air is directly routed into the car's interior.

### Front ventilation



- Turn knob for continuous opening and closing of the air vents.
- Swivel the air vents to alter the airflow direction, arrows.

## Pre-conditioning

### Principle

Pre-conditioning cools or heats the car's interior prior to start of the trip to a comfortable temperature.

The system automatically cools, vents, or heats depending on the internal and outside temperature. Snow and ice may be removed more easily.



## General information

The stationary climate control can be switched on and off directly or via a preset departure time:

- Direct operation, refer to page 196.
- Preset departure times, refer to page 196.

The air automatically exits through the air vents to the windshield, the side windows, the upper body area and into the footwell.

The system switches off automatically after a certain period of time.

If pre-conditioning is used during the charging process, less air conditioning capacity will be required while driving. This optimizes the range.

## Functional requirements

- The drive-ready state is deactivated.
- The high-voltage battery is sufficiently charged or the charging cable is connected.

If the high-voltage battery is heavily discharged, it can take some time after connecting the charging cable before the pre-conditioning is functional.
- With direct operation or preset departure time: depending on inside, outside and set desired temperature.

Make sure that the vehicle's date and time are set correctly.
- To ensure the minimum range of the vehicle, the pre-conditioning may be automatically switched off, for instance after repeated activation or due to an insufficient state of charge of the high-voltage battery. After the stationary climate control is switched off due to an insufficient state of charge, charge the high-voltage battery and switch the

drive-ready state on and off. The pre-conditioning is available again.

- The air vents are open to allow air to flow out.

## Switching on/off directly


### Principle

The system can be switched on or off directly.

The system switches off automatically after a certain period of time.

## Via the Central Information Display (CID)

The system can be switched on or off via the Central Information Display (CID).

1.  "My MINI"
2. "Vehicle settings"
3. "Climate functions"
4. "Activate comfort climate"
5. "Activate now"

## Climate control for departure time

### Principle

Different departure times can be preset to ensure a comfortable interior temperature in the vehicle at the time of departure.

The activation time is automatically determined based on the temperature.


The system promptly switches on before the selected departure time.

The departure time is preselected in two steps:

- Set departure times.
- Activate departure times.

## Setting the departure time




Via the Central Information Display (CID):

1.  "My MINI"
2. "Vehicle settings"
3. If necessary, "Climate functions"
4. "Activate comfort climate"
5. "Plan comfort climate"
6. Set the desired departure time, refer to page 237.

## Activating the departure time

If a departure time is to influence the switching on of the pre-conditioning, the respective departure time must be activated first.

Via the Central Information Display (CID):

1.  "My MINI"
  2. "Vehicle settings"
  3. If necessary, "Climate functions"
  4. "Activate comfort climate"
  5. "Plan comfort climate"
  6. "Precondition for departure"
  7. Activate the desired departure time.
-  The icon on the automatic climate control illuminates when the departure time is activated.
-  The icon on the automatic climate control flashes when the pre-conditioning has been switched on.

# Interior equipment

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Integrated universal remote control

### Principle

The integrated Universal Remote Control in the interior mirror can operate up to 3 functions of remote-controlled systems such as garage door drives, barriers, or lighting systems.

### General information

The Integrated Universal Remote Control replaces up to 3 different hand-held transmitters. To operate the remote control, the buttons on the interior mirror must be programmed with the desired functions. The hand-held transmitter for the particular system is required in order to program the remote control.

Before selling the vehicle, delete the stored functions for the sake of security.

If possible, do not install the antenna of the remote-controlled system, e.g. the garage door drive, near metal objects to ensure the best possible operation.

## Safety information

### Warning

The operation of remote-controlled systems with the integrated universal remote control, such as the garage door, may result in injury, for example, body parts becoming jammed in a garage door. There is a risk of injury or risk of damage to property. Make sure that the travel path of the respective system is clear during programming and operation. Also follow the safety information for the hand-held transmitter.

## Compatibility




If this icon is printed on the packaging or in the operating instructions of the system to be controlled, the system is generally compatible with the integrated Universal Remote Control.

Additional questions are answered by:

- An authorized service center or another qualified service center or repair shop.
- [www.homelink.com](http://www.homelink.com) on the Internet.

HomeLink is a registered trademark of Gen-tex Corporation.

## Overview

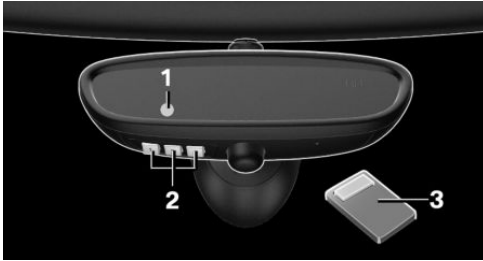

- 1 LED
- 2 Programmable keys
- 3 Hand-held transmitters of the system

## Programming

### General information

The battery of the hand-held transmitter must be fully charged at the time of programming to ensure an optimal range of the integrated universal remote control.

1. Turn on the ignition.
2. Initial commissioning:  
Press and hold the two outer buttons on the interior mirror simultaneously for approximately 10 seconds until the LED flashes green rapidly. This erases all programming of the buttons on the interior mirror.
3. Press the interior mirror button to be programmed. The LED on the interior mirror will slowly begin flashing orange.
4. Hold the hand-held transmitter for the system to be used approx. 1 to 12 in/2.5 to 30 cm away from the buttons on the interior mirror. The required distance depends on the hand-held transmitter.
5. Press and hold the button of the desired function on the hand-held transmitter.  
Canada: if programming with the hand-held transmitter was interrupted, hold

down the interior mirror button and repeatedly press and release the hand-held transmitter button for 2 seconds.

6. – The LED illuminates green: programming completed.  
Release the button.
- The LED flashes fast: programming is not complete.  
Press the button on the interior mirror for 2 seconds and release. Perform this procedure three times to complete the programming procedure.
- If the integrated universal remote control remains nonoperational, continue with the special features for change code wireless systems.
- LED does not flash green after 60 seconds: programming not completed.  
Repeat steps 3 to 6.

To program other functions on other buttons, repeat steps 3 to 5.

### Special feature of the rolling code wireless system

If you are unable to operate the system after repeated programming, please check if the system to be controlled features a rolling code radio system.

Refer to the operating instructions for the system.

For systems with a rolling code radio system, the integrated universal remote control and the system also have to be synchronized.

Please read the operating instructions to find out how to synchronize the system.

Synchronizing is easier with the aid of a second person.



Synchronizing the universal remote control with the system:

1. Park the vehicle within range of the remote-controlled system.
2. Program the relevant button on the interior mirror as described.
3. Locate and press the synchronizing button on the system being programmed, e.g. at the garage gate. You have approx. 30 seconds for the next step.
4. Hold down the programmed button on the interior mirror for approximately 3 seconds and then release it. If necessary, repeat this step up to three times in order to end synchronization. Once synchronization is complete, the programmed function will be carried out.

## Reprogramming individual buttons

1. Turn on the ignition.
2. Press and hold the interior mirror button to be programmed.
3. As soon as the LED on the interior mirror flashes orange after approx. 20 seconds, release the button.
4. Hold the hand-held transmitter for the system to be used approx. 1 to 12 in/2.5 to 30 cm away from the buttons on the interior mirror. The required distance depends on the hand-held transmitter.
5. Press and hold the button of the desired function on the hand-held transmitter.  
Canada: if programming with the hand-held transmitter was interrupted, hold down the interior mirror button and repeatedly press and release the hand-held transmitter button for 2 seconds.
6. The LED can illuminate in different ways.
  - The LED illuminates green: the programming procedure is completed.

Release the button.

- The LED flashes fast: the hand-held transmitter was detected but programming is not complete.

Press the button on the interior mirror for 2 seconds and release. Perform this procedure three times to complete the programming procedure.

If the integrated universal remote control remains nonoperational, continue with the special features for change code wireless systems.

- LED does not flash green after 60 seconds: programming not completed.

Repeat steps 3 to 6.

If the programming procedure is not completed, the previous programming will remain unchanged.

## Operation

### Warning

The operation of remote-controlled systems with the integrated universal remote control, such as the garage door, may result in injury, for example, body parts becoming jammed in a garage door. There is a risk of injury or risk of damage to property. Make sure that the travel path of the respective system is clear during programming and operation. Also follow the safety information for the hand-held transmitter.

The system, such as the garage door, can be operated using the button on the interior mirror while the engine is running or when the ignition is started. To do this, hold down the button within receiving range of the system until the function is activated. The interior mirror LED stays illuminated while the wireless signal is being transmitted.



## Deleting stored functions

All stored functions will be deleted. The functions cannot be deleted individually.

Press and hold the two outer buttons on the interior mirror simultaneously for approximately 10 seconds until the LED on the interior mirror flashes green fast.

## Digital compass

### Overview



- 1 Adjustment knob
- 2 Mirror display

## Mirror display

The compass shows the current driving direction.

## Operating concept


Various functions can be called up by pressing the adjustment knob with a pointed object, such as the tip of a ballpoint pen or similar object. The following adjustment ranges are displayed in succession, depending on how long the adjustment knob is pressed:

- Pressed briefly: turns display on/off.
- 3 to 6 seconds: compass zone setting.
- 6 to 9 seconds: compass calibration.
- 9 to 12 seconds: left/right-hand drive setting.
- 12 to 15 seconds: language setting.

## Setting the compass zones

Sets the particular compass zones on the vehicle so that the compass operates correctly; refer to World map with compass zones.

## World map with magnetic zones

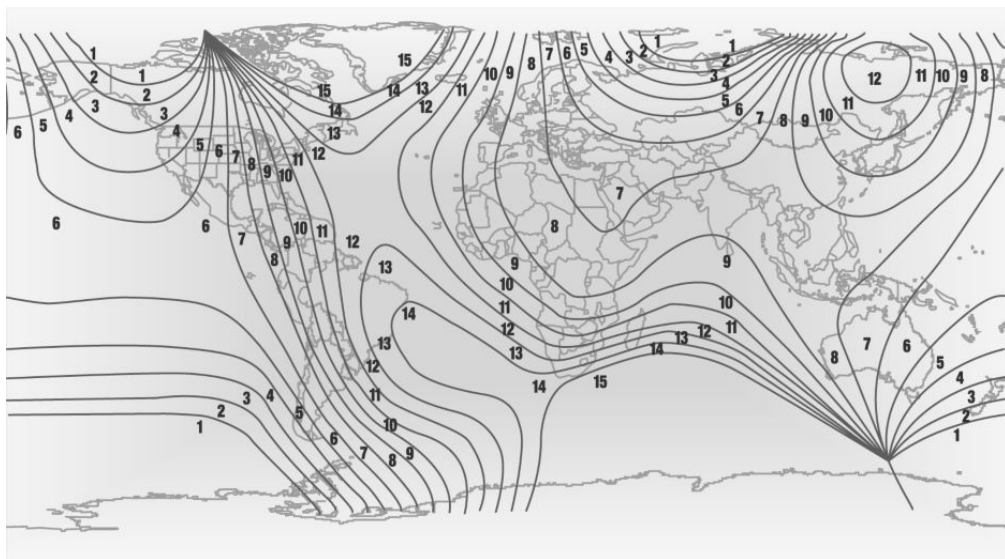

### Procedure

1. Press and hold the adjustment knob for approx. 3 to 4 seconds. The number of the set compass zone appears in the mirror.
2. To change the zone setting, press the adjustment knob quickly and repeatedly until the number of the compass zone that corresponds with your location appears in the mirror.

The set zone is stored automatically. The compass is ready for use again after approximately 10 seconds.

### Calibrating the digital compass

The digital compass must be calibrated in the event of the following:

- The wrong compass point is displayed.
- The point of the compass displayed does not change despite changing the driving direction.
- Not all points of the compass are displayed.

### Procedure

1. Make sure that there are no large metallic objects or overhead power lines near the vehicle and that there is sufficient room to drive around in a circle.
2. Set the currently valid compass zone.
3. Press and hold the adjustment knob for approx. 6 to 7 seconds so that "C" appears on the display. Next, drive in a complete circle at least once at a speed of no more than 4 mph/7 km/h. If calibration is successful, the "C" is replaced by the points of the compass.

## Left/right-hand drive vehicle

The digital compass is already set for right or left-hand drive vehicle at the factory.

## Adjusting the language

Press and hold the adjustment knob for approx. 12 to 13 seconds. Briefly press the adjustment knob again to switch between English "E" and German "O".

Settings are stored automatically after approximately 10 seconds.

## Sun visor

### Glare shield

To provide protection against glare, fold the sun visor down or pivot it to the side.

### Vanity mirror

A vanity mirror is located in the sun visor behind a cover.

When the cover is opened, the mirror lighting switches on.

## Ashtray/cigarette lighter

### Overview



The ashtray is located in one of the frontal cup holders, the cigarette lighter above it in the center console.

## Ashtray

In order to empty the ashtray, remove the ashtray from the cup holder.

## Cigarette lighter

### Safety information

#### Warning

Contact with the hot heating element or the hot socket of the cigarette lighter can cause burns. Flammable materials can ignite if the cigarette lighter falls down or is held against objects. There is a risk of fire and an injury hazard. There is a risk of damage to property. Take hold of the cigarette lighter by its handle. Make sure that children do not use the cigarette lighter.

#### Warning

If metal objects fall into the socket, they can cause a short circuit. There is a risk of injury or risk of damage to property. Insert the cigarette lighter or socket cover again after using the socket.

### Operation



Push in the cigarette lighter. The cigarette lighter can be removed as soon as it pops back out.

## Sockets

### Principle

The socket can be used for electronic devices when the standby or drive-ready state is switched on.

## General information

The total load of all sockets must not exceed 140 watts at 12 volts.

Do not damage the socket by using unsuitable connectors.

## Safety information

### Warning

Devices and cables in the unfolding area of the airbags, such as portable navigation devices, can hinder the unfolding of the airbag or be thrown around in the car's interior during unfolding. There is a risk of injury. Make sure that devices and cables are not in the airbag's area of unfolding.

### Warning

Battery chargers that charge the vehicle battery via sockets or cigarette lighters in the vehicle may overload or damage the 12 V electrical system. There is a risk of injury or risk of damage to property. Only connect battery chargers for the vehicle battery to the jump-start terminals in the engine compartment.

### Warning


If metal objects fall into the socket, they can cause a short circuit. There is a risk of injury or risk of damage to property. Insert the cigarette lighter or socket cover again after using the socket.

## In the center console



Remove the cover or cigarette lighter.

## In the cargo area

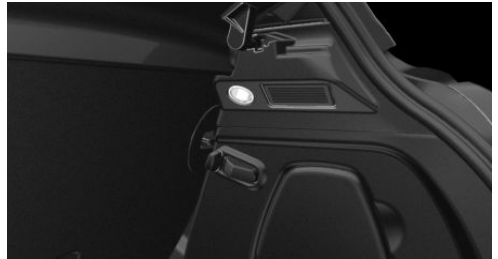

The socket is located on the right side in the cargo area.

## USB port

### General information

Follow the information regarding the connection of mobile devices to the USB port in the section on USB connections, refer to page 54.

## In the center console



Depending on the equipment version, a USB port Type A or a USB port Type A and a USB port Type C are located in the front of the center console.

Properties of upper USB port:

- USB port Type A.
- For charging mobile devices and for data transfer.
- Charge current: max. 1.5 A.

Properties of lower USB port:

- USB port Type C.
- For charging of mobile devices.
- Charge current: max. 3 A.

## Wireless charging tray

### Principle

The wireless charging tray enables the following functions to be performed without cables:

- Charging the rechargeable battery of a mobile phone with Qi capability and of other mobile devices, which support the Qi standard.
- Connect the mobile phone to the external antenna.

Depending on the country, this provides for better network reception and a consistent reproduction quality.

## General information


When inserting the mobile phone, make sure there are no objects between it and the wireless charging tray.

During charging, the surface of the tray and the mobile phone may heat up. Higher temperatures may lead to a reduction in the charge current through the mobile phone, and in isolated cases the charging process is paused temporarily. Follow the relevant instructions in the mobile phone owner's manual.

### NOTE

This device has been tested for human exposure limits and found compliant at a minimum distance of 4 in/10 cm during operation.

Therefore, a distance of 4 in/10 cm must be maintained in every direction when operating the device.

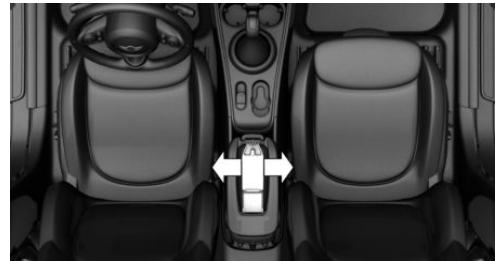

Mounting position of the product.

## Safety information

### Warning

When charging a Qi-compatible device in the wireless charging tray, any metal objects on the tray together with the device can become very hot. If storage media or electronic cards, e.g., chip cards, cards with magnetic strips, or cards that transmit signals, are placed on the tray together

with the device, they may not function correctly. There is a risk of injury and risk of damage to property. When charging mobile devices, make sure there are no objects on the tray together with the device.

**⚠ NOTICE**


The tray is intended for mobile phones up to a particular size. Forceful inserting of the mobile phone into the tray can damage the tray or the mobile phone. There is a risk of damage to property. Observe the maximum dimensions for mobile phones. Do not force the mobile phone into the tray.

**Functional requirements**

- Ignition or standby state is switched on.
- The mobile phone must compatibly support the required Qi standard. Compatible mobile phones, refer to page 52.
- If the mobile phone does not support the Qi standard, the mobile phone can be charged using a special Qi-compatible charging case.
- Use only protective sleeves and covers up to a maximum thickness of 0.07 in/2 mm. Otherwise, the charging function may be impaired.
- The mobile phone must not exceed the maximum size of approximately 5.9 x 3.07 x 0.62 in/150 x 78 x 16 mm.

**Overview**


The wireless charging tray is located in the center armrest.

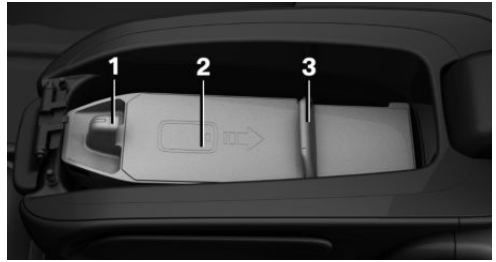

- 1 Front holder with LED
- 2 Storage area
- 3 Movable retaining clip

**Inserting the mobile phone**

1. Open the center armrest.
2. Push back the retaining clip.
3. Insert the mobile phone with the display facing upward in the direction of the front holder, arrow 1.

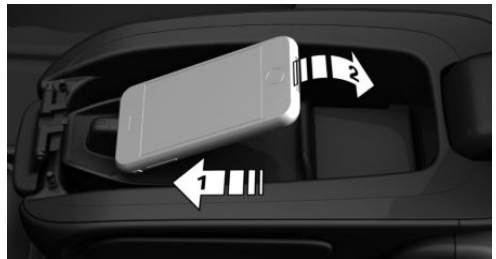

4. Place the mobile phone in the storage area, arrow 2.
5. Push the retaining clip forward and clip the mobile phone in the tray.
6. Close the center armrest.

**Removing the mobile phone**

1. Open the center armrest.
2. Push the retaining clip back and remove the mobile phone.

## LED displays

Color	Meaning
Blue	The mobile phone is charging. Depending on the model, the blue LED is no longer illuminated once the inserted mobile phone with Qi capability is fully charged.
Orange	The mobile phone is not charging. Temperature on the mobile phone possibly too high or foreign object in the charging tray.
Red	The mobile phone is not charging. Contact an authorized service center or another qualified service center or repair shop.

## System limits

At high temperatures on the mobile phone or in the vehicle, the charging functions of the mobile phone may be limited and some functions may no longer work.

## LTE-Compensator - Information and User Manual

Your car is equipped with a wireless charging tray (WCA) to charge your mobile phone and connect it to the mobile network. To ensure the best possible connection a signal booster (LTE-Compensator) is used in conjunction with the WCA. The following paragraphs refer to this booster:

This is a CONSUMER device.

BEFORE USE, you MUST REGISTER THIS DEVICE with your wireless provider and have your provider's consent. Most wireless providers consent to the use of Compensators. Some providers may not consent to the use of this device on their network. If

you are unsure, contact your provider. You MUST operate this device with approved antennas and cables as specified by the manufacturer. Antennas MUST be installed at least 20 cm (8 inches) from any person. You MUST cease operating this device immediately if requested by the FCC or a licensed wireless service provider. Warning E911 location information may not be provided or may be inaccurate for calls served by using this device.

Please observe additionally the following information

- Sprint Nextel will allow consumers to register their signal boosters by calling their toll-free number.
- T-Mobile online registration link: ([www.T-Mobile.com/Booster-Registration](http://www.T-Mobile.com/Booster-Registration)); (<https://saqat.t-mobile.com/sites/SignalBooster#>).
- Verizon's online registration link: (<http://www.verizonwireless.com/wcms/consumer/register-signal-booster.html>).
- AT&T online registration link (<https://securec45.securewebsession.com/attsignalbooster.com/>).
- U.S.Cellular online registration link (<http://www.uscellular.com/uscellular/support/fcc-booster-registration.jsp>).

Before use you must register your booster device with your wireless provider.

If you should be requested by the FCC to cease operating your booster, you are not allowed to insert your mobile phone in the charging tray anymore unless the booster is permanently deactivated by your local MINI dealer.

You must not remove the booster from the car nor use it with any other than the pre-installed coupling device or antenna. Any modification of the existing antenna or coupling device as well as the use of other an-



tennas or coupling devices will cause the cease of the booster's operating license.

The booster device fulfills the network protection standards as required by the FCC, such as intermodulation limits, oscillation detection and gain limits.

Booster Manufacturer: Kathrein Automotive

Model Number: LTECOMPB0

Part Number: 6803145-01

FCC-ID: 2ACC7LTECOMPB0



# Storage compartments

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Safety information

### Warning

Devices connected to the vehicle via a cable, such as mobile phones or loose objects, can be thrown through the vehicle interior while driving, such as in the event of an accident, braking or evasive maneuver. There is a risk of injury. Secure loose objects or devices that are connected to the vehicle via a cable.

### Warning

Anti-slip pads such as anti-slip mats can damage the dashboard. Attached objects may come loose. There is a risk of injury or risk of damage to property. Do not use anti-slip pads.

## Overview

The following storage compartments are available in the interior:

- Glove compartment on the front passenger side.
- Compartments in the doors.
- Storage compartment in the center armrest.
- Storage compartment in front of the cup holders.
- Coat hooks
- Storage tray in the center console.
- Pockets on the backrests of the front seats.

## Glove compartment

### Safety information

#### Warning

Folded open, the glove compartment protrudes in the car's interior. Objects in the glove compartment can be thrown into the car's interior while driving, for instance in the event of an accident, braking or evasive maneuvers. There is a risk of injury. Always close the glove compartment immediately after using it.

## Opening



Pull the handle.

## Closing

Fold up the lid.

## Storage compartments in the doors

### General information

There are storage compartments in the doors.

### Safety information

 **Warning**

Breakable objects, such as glass bottles or glasses, can break in the event of an accident, braking or an evasive maneuver. Broken glass can be scattered in the car's interior. There is a risk of injury or risk of damage to property. Do not use any breakable objects while driving. Only stow breakable objects in closed storage compartments.

## Center armrest

### General information

The center armrest contains a storage compartment.

### Opening



Press button, arrow 1, and open center armrest upward, arrow 2.

### Adjusting the height



Press button, arrow 1, and swing center armrest upward or downward into the desired height, arrow 2.

## Cup holders

### Safety information

#### Warning

Unsuitable containers in the cup holders may damage the cup holders or be thrown about the car's interior in the event of an accident, an evasive maneuver, or forceful braking. Spilled liquids can distract from the surrounding traffic conditions and lead to an accident. Hot drinks can damage the cup holder or lead to scalding. There is a risk of injury or risk of damage to property. Do not force objects into the cup holder. Use lightweight, shatterproof, and sealable containers. Do not transport hot beverages.

### Front



In the center console.

### Back



In front of the back seats and in the side armrests.

## Coat hooks

### General information

The coat hooks are located above the side windows in the rear.

### Safety information

#### Warning

Clothing articles on the coat hooks can obstruct the view while driving. There is a risk of accident. When suspending clothing articles from the coat hooks, ensure that they will not obstruct the driver's view.

#### Warning

Improper use of the coat hooks can lead to a risk of objects flying about during braking and evasive maneuvers. There is a risk of injury and risk of damage to property. Only hang lightweight objects, for instance clothing articles, from the coat hooks.

# Cargo area

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Loading

### Safety information

 **Warning**

High gross vehicle weight can overheat the tires, damage them internally and cause a sudden tire pressure loss. Driving characteristics may be negatively impacted, reducing directional stability, lengthening the braking distances and changing the steering response. There is a risk of accident. Pay attention to the permitted load-carrying capacity of the tires and never exceed the permitted gross vehicle weight.

 **Warning**

Devices connected to the vehicle via a cable, such as mobile phones or loose objects, can be thrown through the vehicle interior while driving, such as in the event of an accident, braking or evasive maneuver. There is a risk of injury. Secure loose

objects or devices that are connected to the vehicle via a cable.

 **Warning**

Improperly stowed objects can slip and be thrown into the car's interior, for instance in the event of an accident, braking or an evasive maneuver. Vehicle occupants can be hit and injured. There is a risk of injury. Stow and secure objects and cargo properly.

 **NOTICE**

Fluids in the cargo area can cause damage. There is a risk of damage to property. Make sure that no fluids leak in the cargo area.


### Steps for determining correct load limit

1. Locate the statement “The combined weight of occupants and cargo should never exceed XXX kg or XXX lbs” on the vehicle’s placard.
2. Determine the combined weight of the driver and passengers that will be riding in the vehicle.
3. Subtract the combined weight of the driver and passengers from XXX kg or XXX lbs
4. The resulting figure equals the available amount of cargo and luggage load capacity. For example, if the “XXX” amount equals 1,400 lbs and there will be five 150 lbs passengers in the vehicle, the amount of available cargo and

- luggage load capacity is 650 lbs (1,400 - 750 (5 x 150) = 650 lbs)
5. Determine the combined weight of luggage and cargo being loaded on the vehicle. That weight may not safely exceed the available cargo and luggage load capacity calculated in Step 4.
  6. If the vehicle will be towing a trailer, load from your trailer will be transferred to the vehicle. Consult this manual to determine how this reduces the available cargo and luggage load capacity of the vehicle.
- Do not stack cargo above the upper edge of the backrests.
  - Small and light cargo: secure with luggage straps or draw straps.
  - Larger and heavy cargo: secure with cargo straps.

## Lashing eyes in the cargo area

### Payload

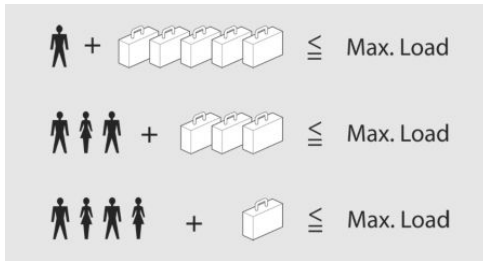

The maximum payload is the sum of the weight of the occupants and the cargo.

The greater the weight of the occupants, the less cargo that can be transported.

### Stowing and securing cargo

- Cover sharp edges and corners on the cargo.
- Heavy cargo: stow as far forward as possible, directly behind and at the bottom of the rear seat backrests.
- Very heavy cargo: when the rear seat is not occupied, secure each of the outer seat belts in the opposite buckle.
- Fold down the rear seat backrests completely to stow large cargo.



Without storage compartment package: to secure the cargo there are two lashing eyes, arrows 1, in the cargo area.

With storage compartment package: to secure the cargo there are six lashing eyes, arrows 1 and 2, in the cargo area.

Attach auxiliary materials to secure the cargo, such as lashing straps, tensioning straps, draw straps or cargo nets, to the lashing eyes in the cargo area.

## Cargo cover

### General information

When the tailgate is opened, the cargo cover is raised.



## Safety information


### Warning

Devices connected to the vehicle via a cable, such as mobile phones or loose objects, can be thrown through the vehicle interior while driving, such as in the event of an accident, braking or evasive maneuver. There is a risk of injury. Secure loose objects or devices that are connected to the vehicle via a cable.

## Removing

For storing bulky objects the cargo cover can be removed.


1. Detach the left and right retaining straps at the tailgate.
2. Pull the cargo cover out of the brackets on the left and right.

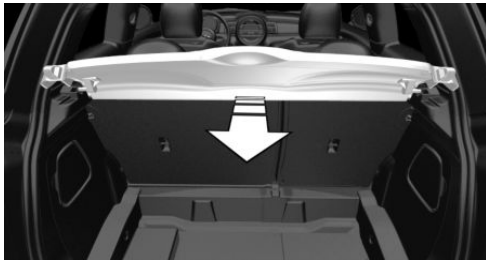

## Installing

1. Slide the cargo cover forward horizontally into the two side brackets until it audibly engages.
2. Hook the left and right retaining straps at the tailgate.

## Storage space under cargo floor panel

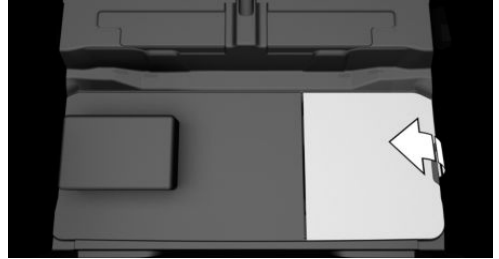

Located under the cargo floor panel on the right side is a recess for the onboard vehicle tool kit.

Fold the right side of the cargo floor panel upward to remove the onboard vehicle tool kit.

## Enlarging the cargo area

### Principle

The cargo area can be enlarged as follows:

- The rear seat backrests can be folded down.
- The rear seat backrests can be moved into an upright loading position using the cargo setting.

### General information

The rear seat backrest is divided into two parts at a ratio of 60 to 40. The left rear seat backrest is connected to the center section. The rear seat backrests can be folded down with the respective loops from the rear.

## Safety information

### Warning

There is a danger of jamming with folding down the rear seat backrests. There is a risk of injury or risk of damage to property. Make sure that the area of movement of the rear seat backrest and the of the head restraint is clear prior to folding down.

### Warning

If a rear seat backrest is not locked, unsecured cargo can be thrown about the car's interior; for instance, in the event of an accident, braking or an evasive maneuver. There is a risk of injury. Make sure that the rear seat backrest is locked after folding it back.

### Warning


The stability of the child restraint system is limited or compromised with incorrect seat setting or improper installation of the child seat. There is a risk of injury or danger to life. Make sure that the child restraint system fits securely against the backrest. If possible, adjust the backrest tilt for all affected backrests and correctly adjust the seats. Make sure that seats and backrests are securely engaged or locked. If possible and necessary, adjust the height of the head restraints or remove them.

### Warning

Body parts can be jammed when moving the head restraint. There is a risk of injury. Make sure that the area of movement is clear when moving the head restraint.

## Folding down the rear seat backrest from the rear

1. Before the rear seat backrest is folded down, hook the corresponding seat belt into the belt retainer on the side.
2. Pull the lever up, arrow 1, and fold the rear seat backrest forward, arrow 2.

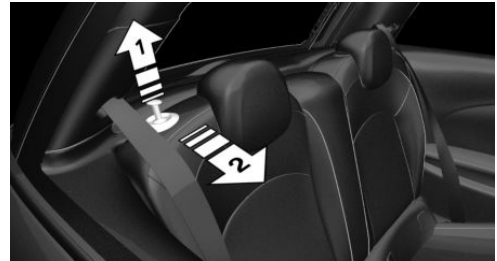

## Cargo position

### Principle

The rear seat backrests can be moved into an upright loading position.

### Adjusting

1. Release the backrest, and tilt it forward.
2. Fold the frame up until it engages.



3. Fold back and engage the rear seat backrest.

## Folding back the backrest

Fold up the backrest and press it into the latch. Make sure that the seat belt is not

caught behind the backrest or in between the backrest and the rear seats.

The red marking on the lever disappears completely.

## Variable cargo area floor

### Principle

With the variable cargo area floor, the cargo area can be configured corresponding to transport requirements.

### General information

Follow instructions on securing cargo, refer to page 212.

### Removing the cargo floor panel



Grasp the cargo floor panel in the rear and fold slightly upward. Next, pull it backward from the supports.

The cargo floor panel can be removed from the cargo area above the tail lights.

### Lower position



- Larger objects can be transported.
- Space for smaller objects remains between the fixed and variable cargo area floor.

### Folded up position

### Safety information

#### Warning

Improper use of the cargo area floor can lead to a risk of objects flying about during braking and evasive maneuvers, for example. There is a risk of injury and risk of damage to property.

- Do not use the cargo area floor to separate the cargo area and vehicle interior in the sense of a luggage net.
- Only use the cargo area floor in the folded-up position when the rear seat backrests are folded up and locked.
- Fold down the cargo area floor before driving off.
- Always secure cargo against slipping, using straps, belts and lashing eyes, for instance.



## Fold up the cargo floor panel



Fold up the cargo floor panel in the lower position and push it behind the locks, arrow. You've reached the maximum cargo height.

## Upper position



- With the backrests folded down, a long, flat loading platform is produced.
- Maximum payload in this position:  
330 lbs/150 kg.
- Space for objects remains between the fixed and variable cargo area floor.

# Things to remember when driving

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Break-in procedures

### General information

Moving parts need to work together smoothly.

The following instructions will help you to achieve a long vehicle life and good efficiency.

### Safety information

#### Warning

Due to new parts and components, safety and driver assistance systems can react with a delay. There is a risk of accident. After installing new parts or with a new vehicle, drive conservatively and intervene early if necessary. Observe the break-in procedures of the respective parts and components.

### Tires

Tire traction is not optimal due to manufacturing circumstances when tires are brand new.

Drive conservatively for the first 200 miles/300 km.

### Brake system

Brake disks and brake pads must be run in to avoid possible brake noise. Drive cautiously for the first approx. 300 miles/500 km.

### Following part replacement

The same break-in procedures should be observed if any of the components mentioned above have to be renewed in the course of driving.

## General driving notes

### Closing the tailgate

#### Safety information

#### Warning

An open tailgate protrudes from the vehicle and can endanger occupants and other road users or damage the vehicle in the event of an accident, braking or evasive maneuvers. There is a risk of injury or risk of damage to property. Do not drive with the tailgate open.

### Driving with the tailgate open

If the vehicle still needs to be driven with the tailgate open:

- Close all windows and the glass sunroof.
- Greatly increase the blower output.
- Drive moderately.

## Ice on window glass

### NOTICE

The window will be lowered slightly when pulling on the door handle. In the event of frost, the window may be frozen solid and may not be able to be lowered. There is a risk of damage to property. When pulling on the door handle, make sure that the window is lowered. If necessary, remove snow and ice from the window. Do not open the door with force.

## Mobile radio in the vehicle

### Warning

Vehicle electronics and mobile communication devices can influence one another. There is radiation due to the transmission operations of mobile communication devices. There is a risk of injury or risk of damage to property. If possible, in the car's interior only use mobile communication devices, such as mobile phones, with a direct connection to an external antenna or the Personal eSIM in order to prevent mutual interference and to deflect radiation from the vehicle interior.

## Aquaplaning

On wet or slushy roads, a wedge of water can form between the tires and road surface.

This phenomenon is referred to as aquaplaning. It is characterized by a partial or complete loss of contact between the tires and the road surface, ultimately undermin-

ing your ability to steer and brake the vehicle.

## Driving through water

### General information

When driving through water, follow the following:

- Drive through calm water only.
- Drive through water only if it is not deeper than maximum 9.8 inches/25 cm.
- Drive through water at a maximum of walking speed, up to 3 mph/5 km/h.

### Safety information

### NOTICE

When driving too quickly through deep water, the water can penetrate the engine compartment, the electrical system, or the transmission. There is a risk of damage to property. When driving through water, do not exceed the maximum indicated water level and the maximum speed for driving through water.

## Braking safely

### General information

The vehicle is equipped with an Antilock Braking System as a standard feature.

Perform emergency braking in situations that require such. To achieve the best possible brake boosting, do not reduce the pressure on the brake pedal during full braking. Steering is still responsive. You can still avoid any obstacles with a minimum of steering movement.

The pulsation of the brake pedal and sounds from the hydraulic circuits indicate that the

Antilock Braking System is in its active mode.

## Objects in the travel path of the pedals

### **Warning**

Objects in the driver's footwell can limit the pedal travel or block a depressed pedal. There is a risk of accident. Stow objects in the vehicle such that they are secured and cannot enter into the driver's footwell. Use floor mats that are suitable for the vehicle and can be safely attached to the floor. Do not use loose floor mats and do not layer several floor mats. Make sure that there is sufficient clearance for the pedals. Ensure that the floor mats are securely fastened again after they were removed, for instance for cleaning.

## Driving in wet conditions

In case of wet roads, exposure to road salt or in heavy rain, gently depress the brake pedal every few kilometers.

Ensure that this action does not endanger other road users.

The heat generated during braking dries brake disks and brake pads and protects them against corrosion.

In this way the brake force will be available when you need it.

## Hills

### General information

The braking effect of the drivetrain can be influenced through the energy recovery process.

## Safety information

### **Warning**

Light but consistent pressure on the brake pedal can lead to high temperatures, brake wear and possibly even brake system failure. There is a risk of accident. Avoid placing excessive stress on the brake system.

### **Warning**

In idle state or with the drive-ready state switched off, safety functions, for instance engine braking effect, braking assistance and steering assistance, may not be available. There is a risk of accident. Do not attempt to drive in idle state or with drive-ready state switched off.

## Brake disk corrosion

Corrosion on the brake disks and contamination on the brake pads are increased by the following circumstances:

- Low mileage.
- Extended stationary periods.
- Infrequent use of the brakes.
- Aggressive, acidic, or alkaline cleaning agents.

Corrosion buildup on the brake disks will cause a pulsating effect on the brakes when braking slowly - generally this cannot be corrected.

## Condensation water under the parked vehicle

When using the automatic climate control, condensation water develops and collects underneath the vehicle.

## Ground clearance

### NOTICE

If the ground clearance is insufficient, e.g., curbs or underground garage entrances, contact with vehicle parts, e.g., spoiler, and the underbody may occur. There is a risk of damage to property. Ensure that there is sufficient ground clearance available.

- Always place the heaviest pieces on the bottom.
- Secure the roof luggage firmly, for instance using luggage straps.
- Do not let objects project into the swiveling range of the tailgate.
- Drive cautiously and avoid driving off and braking with jerky movements or fast cornering.

## Roof-mounted luggage rack

### General information

Installation only possible with roof rack.

Roof racks are available as optional accessories.

### Installation

Follow the assembly instructions of the roof rack.

### Loading

Because roof-mounted luggage racks raise the vehicle's center of gravity when loaded, they have a major effect on vehicle handling and steering response.

Therefore, note the following when loading and driving:

- Do not exceed the approved roof/axle weights and the approved gross vehicle weight.
- Be sure that adequate clearance is maintained for tilting and opening the glass sunroof.
- Distribute the roof load uniformly.
- The roof load should not extend past the loading area.

## Driving on racetracks

### Warning

The vehicle is not designed for use in M Sport or motorsport-like competition. There is a risk of accident. Do not use the vehicle for M Sport or motorsport-like competitions.

Higher mechanical and thermal loads during racetrack operation lead to increased wear. Use of the vehicle in M Sport or motorsport type competition is an improper use of the vehicle and may affect your warranty coverage. Please consult the "New Vehicle Limited Warranty" Booklet for further information on warranty matters.

# Increasing range

## Vehicle features and options

---

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## General information

---

The vehicle contains comprehensive technologies for reducing energy consumption and for maximizing the range.

The range depends on a number of different factors, refer to page [125](#).

The implementation of certain measures, driving style and regular maintenance can increase the range and thereby also reduce the environmental pollution.

## Removing unnecessary cargo

---

Additional weight reduces the range.

## Removing attached parts following use

---

Remove roof-mounted luggage racks that are no longer required following use.

Attached parts on the vehicle impair the aerodynamics and increase the energy consumption.

## Close the windows and glass sunroof

---

Driving with the glass sunroof and windows open results in increased drag and thereby reduces the range.

## Tires

---

### General information

Tires can affect energy consumption in various ways, for instance energy consumption can be influenced by tire size.

### Checking the tire pressure regularly

Check and, if needed, correct the tire inflation pressure at least twice a month and before starting on a long trip.

Low tire inflation pressure increases rolling resistance and thus raises energy consumption and tire wear.

## Pre-conditioning

---

Run advance climate control, refer to page [195](#), in the vehicle during charging before driving off.

Heating and cooling operations are very energy intensive and substantially reduce the electric range.

## Anticipatory driving

---

Driving smoothly and proactively reduces energy consumption.

Avoid unnecessary acceleration and braking.

Maintain a suitable distance to the vehicle driving ahead of you.

Longer braking procedures result in more efficient charging of the high-voltage battery via energy recovery from braking.

## Using accelerator pedal for deceleration and coasting

---

When approaching a red traffic light, use accelerator pedal for decelerating.

For going downhill use coasting function; for this purpose, press accelerator pedal just enough that the vehicle rolls.

## Switching off any functions that are not currently needed

---

Functions such as seat heating and the rear window defroster require a lot of energy and reduce the range, especially in city traffic and with stop-and-go driving.

Switch off these functions if they are not needed.

The GREEN and GREEN+ driving modes support the energy-conserving use of comfort features. They automatically perform a partial or complete deactivation of these functions.

## Having maintenance carried out

---

Have the vehicle maintained regularly to achieve optimal vehicle efficiency and service life. MINI recommends that maintenance work be performed by an authorized service center.

Additional information:

MINI maintenance system, refer to page 261.

## Using eDRIVE efficiently

---


### Principle

eDRIVE operates automatically. Proactive driving utilizes energy consumption and energy recovery optimally. Energy recovery is used to charge the high-voltage battery. Energy recovery is important for the supply of electrical components and thus a prerequisite for a long range. Energy consumption and energy recovery depend very much on your driving style, among other factors.

### Optimizing driving style

#### Power gauge

Your driving style can be optimized using the power gauge.

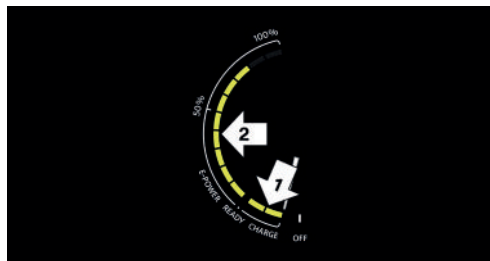

The energy recovery occurs during coasting and braking and is displayed in the power gauge by the accelerator pedal indicator.

The accelerator pedal indicator is within the CHARGE range.

Efficient energy recovery:

- The accelerator pedal moves in the yellow range of the CHARGE display, arrow 1.
- The energy consumption while driving can be optimized by efficient acceleration.

Set high energy recovery, refer to page 105, to recover as much energy as possible.

Efficient acceleration:

- The accelerator pedal moves in the yellow range of the ePOWER display, arrow 2.
- Use deceleration by coasting as often as possible for energy recovery.

## Discharge of the high-voltage battery

### General information

Longer idle periods, refer to page 238, can reduce the charge state of the high-voltage battery.

## GREEN Mode

### Principle

GREEN Mode supports an energy-efficient driving style. For this purpose, the engine control and comfort features, for instance the climate control output, are adjusted.

In addition, situational instructions are displayed to support an energy-efficient driving style.

### General information

The system includes the following MINIMALISM functions and MINIMALISM displays:

- GREEN Limit, refer to page 225
- GREEN climate control, refer to page 225.
- GREEN tip, driving instruction, refer to page 225.
- MINIMALISM analyzer, refer to page 226.

### Activating GREEN Mode



Press the MINI Driving Modes switch downward until GREEN is displayed in the instrument cluster.

### Configuring GREEN

Via MINI Driving Modes switch

1. Activating GREEN Mode.
2. "Configure GREEN"
3. Select the desired setting.



## Via the Central Information Display (CID)

1.  "My MINI"
2. "Vehicle settings"
3. "Configure GREEN"
4. Select the desired setting.

## Activating/deactivating the functions

The following functions can be activated/deactivated:

- "GREEN speed warning"
- "GREEN climate control"
- "Coasting"

Settings are stored for the driver profile currently used.

## GREEN Limit

- "GREEN speed warning": GREEN Limit is activated.

A GREEN tip is displayed if the speed of the set GREEN Limit is exceeded.

- "Tip at:"

Set the desired speed for the GREEN Limit.

When GREEN+ is activated, the GREEN Limit is set to 55 mph/90 km/h.

## GREEN climate control

The air conditioning is adjusted to save energy.

The electrical consumption can be reduced with a minor change to the set temperature and heating or cooling the car interior more slowly.

The power output to the seat heating and exterior mirror heating is reduced.

## GREEN potential savings

Shows potential savings with the current configuration in percentages.

## Display in the instrument cluster


### GREEN tip, driving instruction

#### General information

The GREEN tip indicates that your driving style can be changed to be more energy efficient, e.g., by reducing vehicle speed.



#### Activating/deactivating the display

Activate information relating to the driving style and GREEN tips in the instrument cluster using the Central Information Display (CID):

1.  "My MINI"
2. "System settings"
3. "Displays"
4. "Instrument panel"
5. "GREEN info"

## GREEN tip, icons

An additional icon and text instructions are displayed.


Icon	Measure
	For an efficient driving style, look well ahead when driving, accelerate conservatively, and delay accelerating.
	Reduce speed to the selected GREEN speed.

## Indications on the control display

### Displaying MINIMALISM information

The current operating principle of the functions in GREEN driving mode can be displayed on the control display.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Technology in action"
3. "MINIMALISM"

Information is shown on the following functions:

- Auto Start/Stop function.
- Energy recovery.

## MINIMALISM analyzer

### Principle

In this situation, the function helps develop an especially efficient driving style and to save energy.

For this purpose, the driving style is analyzed. The assessment is done in various categories and is displayed on the control display.

This display will help you adjust your driving style and save some energy.

### Functional requirement

This function is available in GREEN driving mode.

### Displaying the MINIMALISM analyzer

Via the Central Information Display (CID):

1.  "My MINI"
2. "Technology in action"
3. "MINIMALISM Analyser"

### Display on the control display

The display of the MINIMALISM analyzer consists of a fish in a water glass and a value table.

The fish and the movements of the water in the bowl symbolize the efficiency of the driving style.

Depending on the equipment, the fish is shown with efficient and inefficient driving style or only with inefficient driving style.

The more efficient the driving style, the less the water sloshes around in the bowl and the better is the fish's mood. If the driving style is inefficient, the water oscillates, the fish's mood worsens, and a reduced number of stars is displayed.

The table of values contains stars and evaluates the driving style in different categories. The more efficient the driving style, the more stars are displayed in the table.

To support an efficient driving style, GREEN tips are displayed while driving.

Tips for an energy-saving driving style, Increasing the range, refer to page [222](#).



# Charging the vehicle

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Principle

The vehicle can be charged using various charging cables at charging stations or domestic socket outlets. Control and monitoring of the charging process are handled fully automatically. When charging with AC, the charge current level can be adjusted via the on-board monitor.

## General information

### Charging the high-voltage battery

The high-voltage battery is used as an energy accumulator. The high-voltage battery can be charged utilizing energy recovery during the trip or via the power grid.

Charge the vehicle at a suitable charging device.

Charge the high-voltage battery regularly so that it operates optimally.

When charging via the power grid, you can choose between the following variants:

- Domestic socket outlet.
- AC charging station.
- DC charging station.

For optimal use of the energy from the power grid, charging at a charging station, e.g., at a MINI Wallbox, is recommended.

Ensure that the charging station is installed according to the technical requirements of the power grid, e.g. by a qualified electrician.

## Charge current

### General information

The charge current strength is indicated in amperes.

There are differences in the maximum permissible charging current depending on the local power grid.

Before charging, set a suitable current limit for the charging current.

When charging at charging stations, the permissible charging current is automatically detected and a current limit is set.

When charging at a domestic socket outlet, set the current limit yourself.

### Charging on a domestic socket outlet

The permitted charge current strength must be determined, for instance by a qualified electrician, before first charging with your own domestic socket outlet or when charging with third-party domestic socket outlets.

The charge current strength for charging at a domestic socket outlet, refer to page 235, can be adjusted in the vehicle at three levels.

At delivery, the charge current for charging at a domestic socket outlet is set to the lowest level.

Depending on the country-specific version, one of several ampere ratings is printed on the Mode 2 charging cable. This ampere

rating is the limit which must be adhered to for the vehicle if the charge current is set to the highest level. Depending on the charging cable, the charge current strength may vary when lower levels are set.

## Overview

Imprint on the charging cable	Charge current setting		
	"Max."	"Reduced"	"Low"
6 A	6 A	6 A	6 A
8 A	8 A	6 A	6 A
10 A	10 A	7.5 A	6 A
12 A	12 A	9 A	6 A
15 A	15 A	11.25 A	7.5 A

Depending on the charge current setting, the charging duration changes.

## Charging at an AC quick charging station

The permitted charge current strength must be determined prior to charging at an AC quick charging station, for instance from the call operator of the AC quick charging station. The permitted charge current strength can vary by country.

The charge current strength for charging at an AC quick charging station, refer to page 236, can be adjusted in the vehicle at two levels.

At delivery, the charge current for charging at an AC quick charging station is set to "Reduced". Maintain this setting unless it was verified that a higher charge current strength is permitted in the individual case.

The charge current changes depending on the setting.

"Max."	"Reduced"
32 A	16 A

The charge current can only be changed when charging with a fast charging cable (mode 3) with single-phase charging current.

## Safety information

### Warning

Working with electrical current improperly can lead to electric shock due to high voltages or high currents. There is a risk of fire or danger to life. Observe the general safety regulations when working with electrical current.

**⚠ Warning**

A faulty or incorrectly designed charging device at the charging location can cause damage to the vehicle and overload the power supply at the charging location. There is a risk of fire and an injury hazard.

The manufacturer of the vehicle recommends that, prior to your first use of a charging location, you have the compatibility of the following components confirmed:

- Charging cable.
- Charging station.
- Domestic socket outlet and connected circuits.

**⚠ Warning**

Damaged or worn charging equipment, e.g., worn contacts, can become hot. There is a risk of fire. Only use chargers that are in good condition.

**⚠ Warning**

Contact with live components can lead to an electric shock. High voltage is present at the charging connection. There is a risk of injury or danger to life.

The manufacturer of the vehicle recommends that work on the charging connection, for instance cleaning, be performed by an authorized service center or another qualified service center or repair shop.

**⚠ NOTICE**

The charging cable connected to the vehicle and the charging cable connections may be damaged due to mechanical load. There is a risk of damage to property. Do not apply mechanical loads to the charging

cable and the charging cable connections. Route the charging cable to the vehicle freely and avoid stress due to pulling or bending.

## Charging cable

### General information

Use a Mode 2 charging cable, Mode 3 charging cable, or the permanently installed charging cable of a charging station to charge the vehicle.

Different charging cables can be required depending on the country.

### Safety information

**⚠ Warning**

Incompatible charging cables or unsuitable charging stations can become hot and damage the vehicle. There is a risk of fire. Use charging cables or charging stations for charging that are suitable for the respective vehicle type.

An authorized service center will be glad to provide information about suitable charging cables.

**⚠ Warning**

Improper use of the charging cable can prevent charging and lead to damage, for instance cable fire. There is a risk of fire. Use the charging cable only for charging the vehicle, and do not extend it using cables or adapters.

**⚠ Warning**

Damaged charging cables can become hot or cause electric shock. There is a risk of fire or an injury hazard. Use undamaged charging cables only.

## Mode 2 charging cable

Depending on the country version, the vehicle scope of delivery includes a Mode 2 charging cable.

Mode 2 charging cables can be used to charge the vehicle from grounded domestic socket outlets. Charging at domestic socket outlet electrical connections is performed with alternating current.

When a Mode 2 charging cable is used, the efficiency values may differ from those stated on the energy label.

The Mode 2 charging cable is also referred to as standard charging cable.

## Flexible Fast Charger

The Flexible Fast Charger is a special mode 2 charging cable.

The interchangeable mains plugs of the Flexible Fast Charger allow you to charge flexibly using domestic socket outlets or industrial sockets with protective conductors.

## Mode 3 charging cable

Depending on the country version, the vehicle scope of delivery includes a Mode 3 charging cable.

The Mode 3 charging cable makes it possible to quickly recharge at sockets of designated AC charging stations using a special connector. Charging is performed with alternating current at designated AC charging stations. The charging process can be completed faster than at domestic socket outlets.

Depending on vehicle equipment and national-market version, a maximum charge current level of 16 A to 32 A is possible.

The charging cable may be permanently installed at the charging station.

The Mode 3 charging cable is also referred to as AC quick charging cable.

## DC charging cable

The DC charging cable that is permanently installed at the charging station makes it possible to charge at DC charging stations. Charging is performed with direct current at designated DC charging stations. At the higher dimensioned electrical connection of a DC charging station, the charging time is normally substantially shorter compared to a domestic socket outlet or AC charging station.

During charging at a DC charging station, an indication in the instrument cluster, refer to page 236, is displayed.

Charge the vehicle only with a DC charging cable with a length less than 98 ft/30 m.

The DC charging cable is also referred to as Mode 4 charging cable.

## Storage

For the delivery, the charging cable is stowed in the luggage compartment, for instance under the cargo floor panel or in a bag.

Stow charging cable after use in the same place again.

If required, store the charging cable with the installed connector cover to prevent moisture in the charging cable plug.

## Connecting

### Charging socket cover



The charging socket cover is located on the right side of the vehicle.

Always keep charging socket clean and unobstructed.

Keep the charging socket cover closed when the charging socket is not used.

### Connecting the charging cable

To connect, engage selector lever position P, deactivate drive-ready state, and unlock the vehicle. Apply the parking brake, if necessary.

Before connecting, if necessary clean the charging cable plug and the area between

the charging socket cover and charging socket, e.g., remove snow.

1. Tap on the charging socket cover, arrow. The charging socket cover opens.



2. Remove the charging socket lid, arrow.



3. Remove the cover of the charging cable connector, if needed.
4. Connect the Mode 2 charging cable to the domestic socket outlet or the Mode 3 charging cable to the port at the AC charging station as needed.
5. Insert the charging cable connector for the charging socket and push it in until it engages.
6. Hold the charging cable until it is correctly locked.

When charging at a charging station, follow the instructions on the charging station.

## Removing

AC charging: when the charging process is active and the vehicle is locked, the charging cable is locked. Unlock the vehicle before removing the cable.



Direct current charging: during the charging process, the charging cable is locked. When the charging process is completed, the charging cable is automatically unlocked.

If necessary, clean the area between the charging socket cover and charging socket, for instance from snow, before removing it.

1. Unlock the vehicle with the vehicle key if it is locked.  
Charging cable is unlocked.
2. Press the release button on the handle, arrow 1, and grasp the charging cable at the gripping areas.  
Charging process is interrupted.



3. Detach the charging cable from the charging socket, arrow 2.
4. Put the charging socket lid back on.
5. Press on the charging socket cover until it engages.
6. Attach cover of the charging cable connector, if needed.
7. Detach the Mode 2 charging cable from the domestic socket outlet or the Mode 3 charging cable from the port at the AC charging station as needed.
8. Stow the charging cable.

At a charging station, insert the permanently installed charging cable in the place provided for it.

## Unlocking the charging cable


### Principle

The charging cable can be unlocked electronically and removed:

- When the vehicle is locked.
- When a charging station is defective.

### Unlocking

Via the Central Information Display (CID):

1.  "My MINI"
2. "Plan charging/climate control"
3. "Settings charging current"
4. "Unlock charging cable"

## Charging process

### General information

At high temperatures, the high-voltage battery is initially cooled. There may be a delay before charging starts. If the high-voltage battery is discharged, cooling of the high-voltage battery may not be possible. The charging process cannot be started.

If the Mode 2 charging cable is exposed to high temperatures and direct sunlight, this may interrupt the charging process. Charging will resume automatically.

The charging process may take longer under extremely low or high temperatures.

### Safety information

#### Warning

Improper use of the power mains connection can lead to damage, for instance cable fire. There is a risk of injury or risk of damage to property. Use the charging ca-

ble only for charging the vehicle, and do not extend it using cables or adapters.

### **Warning**

If the charge current strength is adjusted incorrectly, the power grid of the domestic socket outlet can be overloaded and overheat. There is a risk of fire. Adjust the charge current strength to the power grid prior to charging on domestic socket outlets. With unknown power networks, set on the lowest level.

### **Warning**

An incorrectly connected charging cable can lead to damage, for instance cable fire. There is a risk of injury or risk of damage to property. Make sure that the charging cable connector is completely inserted in the charging socket.

### **NOTICE**

The charging socket cover and charging socket outlet cover may be damaged by strain. There is a risk of damage to property. Do not strain the charging socket cover and charging socket outlet cover, e.g., by dropping the charging cable.

## Starting the charging process

1. Engage selector lever position P. Set the parking brake, if needed.
2. For planning the charging process, refer to page 235.
3. Switch off drive-ready state.
4. Connect the Mode 2 charging cable to the domestic socket outlet or the Mode 3 charging cable to the port at the AC charging station as needed.

5. Open the charging socket cover.
6. Connect the charging cable to the vehicle, refer to page 232.
7. Lock vehicle if it is unlocked.

## Charging status display

### Indicator light on the charging socket



An indicator light is located on the charging socket.


## Charging status

Light	Charging status
White	Charging cable can be connected or removed.
Flashes orange	Charging process is being prepared.
Yellow	Charging process paused.
Flashes yellow	Charging process is active.
Flashes red rapidly	Fault in the charging process.
Green	Charging process is complete.

When the vehicle is locked, the indicator light goes out after some time.

When the vehicle is unlocked, the yellow indicator light flashes continuously. The

other indicator lights turn off after some time.

 Press the button on the vehicle key to check the charging state. The charging status is indicated on the indicator light. In some cases the vehicle is locked.

Additional messages about the charging status, for instance the probable end of charging or the planned departure time, can be shown in the instrument cluster or on the control display.

## Planning the charging process

### General information

The charging process can be adapted to constraints, for instance the cost of electricity. The vehicle controls the charging process in such a way that the charging process is completed if possible at the departure time. A departure time must be set for this purpose, refer to page [237](#).

The following settings are available:

- Immediate charging.
- Set a time frame for charging.
- Set the charge current for charging via a Mode 2 charging cable.

If drive-ready state is switched off, changes can be made via the Central Information Display (CID). Settings for the pre-conditioning and charging process are also accepted for planned departure times.

### Setting the charging mode


Via the Central Information Display (CID):

1.  "My MINI"
2. "Plan charging/climate control"
3. Select the desired setting:

- "Charge immediately": the charging process starts as soon as the charging cable is connected.
- "Charge for departure time": If a departure time is set, a time frame for charging can be set, e.g., to charge using a cheap electricity rate.

### Setting a time frame for charging

Via the Central Information Display (CID):


1.  "My MINI"
2. "Plan charging/climate control"
3. "Set low cost time slot"
4. Set start for charging.
5. Set end for charging.

The vehicle can also start the charging process before the selected time frame begins or end it after the selected time frame finishes. The status update of the charging process is adjusted so the vehicle can be as fully charged as possible and, if applicable, its climate adjusted by the departure time.

### Set the charge current for charging via a Mode 2 charging cable

Depending on the electrical mains, the vehicle must be charged with a different charge current strength, refer to page [228](#).

Via the Central Information Display (CID):

1.  "My MINI"
2. "Plan charging/climate control"
3. "Settings charging current"
4. "Level 1 (120V)"

Settings are stored. When you change charging locations you also might need to change the setting for charging.


Set the charge current strength at third-party domestic socket outlets to the lowest level.

## Set the charge current for charging via a Mode 3 charging cable

Depending on the electrical mains, the vehicle must be charged with a different charge current strength, refer to page 229.

When charging with an Mode 3 charging cable, the charging process can be completed faster at an AC charging station.

Via the Central Information Display (CID):

1.  "My MINI"
2. "Plan charging/climate control"
3. "Settings charging current"
4. "Level 2 (208-240V)"

Settings are stored. When you change charging locations you also might need to change the setting for charging.

The charge current can only be changed when charging with a fast charging cable (mode 3) with single-phase charging current.

## Stopping the charging process

The charging process can be stopped at any time by removing the charging cable and continued at a later time by connecting the charging cable. For example, this enables other consumers to use the electrical connection in the meantime or prevents simultaneous high power draws from multiple consumers.

Detach the charging cable, refer to page 232.

## Continuing the charging process

If the charging process is interrupted, for instance due to a temporary power failure, the charging process will continue automatically after the interruption.

When the vehicle is charged at a public charging station, the charging process may

not continue automatically after an interruption.

## Ending the charging process



1. Remove the charging cable from the vehicle, refer to page 232.
2. Stow the charging cable as required.
3. Close the charging socket cover.
4. Lock vehicle if it is unlocked.







## Displays in the instrument cluster

The charge state indicator light, refer to page 119, shows the charge state of the high-voltage battery in the instrument cluster, if the standby state or drive-ready state is switched on. If all bars are filled, the high-voltage battery is fully charged.

Even if no bars are filled, the high-voltage system is still under high voltage.

Information regarding the charging process is shown on the charging screen.

Display	Meaning
	Ring orange: the charging process is being prepared.
	Ring yellow animated: the charging process is active or it will start at the set time.
	Ring yellow: the charging process pauses.
	Ring red: fault in the charging process.
	Ring green: the charging process is completed.
	End of charging time or set departure time.

Display	Meaning
	DC charging active on a DC charging station.
	Departure time set.
	Climate control activated at departure time.
	Flashing: ventilation active.
	Flashing: heating active.
	Flashing: cooling active.

## Departure time

### Principle

For optimum range and climate control, the departure time can be set before parking the vehicle.

### General information

With a set departure time, the vehicle is preheated or precooled during the charging process if climate control is set. Climate control output is reduced during the trip. This increases the range during electric driving.

The following settings are possible for departure time:


- Climate control for departure time.
- Scheduling of up to three regular departure times.

If drive-ready state is switched off, changes can be made via the Central Information Display (CID). Settings for climate control

and charging process are also applied for scheduled departure times.


### Climate control for departure time

Via the Central Information Display (CID):

1.  "My MINI"
2. "Plan charging/climate control"
3. "Precondition for departure"

### Setting the departure time


Via the Central Information Display (CID):

1.  "My MINI"
2. "Plan charging/climate control"
3. "Set departure time"
4. Set the desired days of the week, if needed.
5. Set the desired time.

Up to three departure times can be set.

### Activating the departure time

Via the Central Information Display (CID):

1.  "My MINI"
2. "Plan charging/climate control"
3. "Set departure time"  
Set departure times are displayed.
4. For example activate "Departure time 1".

Up to three departure times can be activated.

The set departure time will be deactivated if the departure time was ignored three times in a row.

## Climate control

The following settings for vehicle air conditioning are possible:

- Activate pre-conditioning immediately, refer to page 195.  
The range is reduced if pre-conditioning is activated without a charging cable connected.
- Planned climate control at the set departure time, refer to page 196.  
If a Mode 2 charging cable is used, the high-voltage battery may not be fully charged at departure time.

## Discharged high-voltage battery and vehicle battery

### General information

In addition to the high-voltage battery, the vehicle has a 12 volt vehicle battery, which is required for operation of the onboard electronics.

With a discharged vehicle battery, no operation of the vehicle is possible.

## Service life of high-voltage battery

### General information

The performance of the high-voltage battery decreases over its service life. The service life of the high-voltage battery can be optimized by how it is used.

### Charging instructions

When charging multiple times in succession using DC, e.g. during a longer trip, the charging capacity is temporarily reduced as needed to protect the high-voltage battery.

The charging capacity is also reduced as the service life of the high-voltage battery increases.

To optimize the service life of the high-voltage battery, note the following:

- Preferably charge at AC charging stations for daily use.
- If possible, keep the charge level between 10 % and 80 %.
- Recharge the high-voltage battery as close to a planned departure as possible. A time frame can be set for charging. Charging in the time frame, see Scheduling the charging process, refer to page 235.

### Before and while driving

To optimize the service life of the high-voltage battery, note the following:

- Bring the high-voltage battery to operating temperature before driving. To do this, preheat/precool the vehicle. Setting the departure time, refer to page 237.
- Drive proactively, refer to page 223.

### Parking

To optimize the service life of the high-voltage battery, note the following:

- Avoid direct sunlight at high outside temperatures.
- At low outside temperatures, park the vehicle in a protected location such as in a garage.

### Long stationary periods

To optimize the service life of the high-voltage battery, note the following:

- If possible, park the vehicle with a charge level between 30 % and 50 %.
- Do not leave the charging cable connected.
- Do not park the vehicle for longer than 14 days if the electric range is exhausted.

## Taking out of service

If the vehicle is parked for more than three months, observe the following:

- Park the vehicle with a battery charge state between 30 % and 50 %.
- Do not leave the charging cable connected.
- Check the battery charge at least once within 6 months.
- Charge up to 50 % if the battery charge state is below 10 %.

## Maintenance

The high-voltage battery is maintenance-free.

# Wheels and tires

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Tire pressure

### General information

The tire condition and tire pressure influence the following:

- The service life of the tires.
- Driving safety.
- Driving comfort.
- Energy consumption.

### Safety information

#### Warning

A tire with too little or no tire inflation pressure may heat up significantly and sustain damage. This will have a negative impact on aspects of handling, such as steering and braking response. There is a risk of accident. Regularly check the tire inflation pressure, and correct it as needed, for instance twice a month and before a long trip.

## Tire pressure specifications

### In the tire inflation pressure table

The tire inflation pressure table, refer to page 241, contains all tire inflation pressure specifications for the specified tire sizes at the ambient temperature. The tire inflation pressure values apply to tire sizes approved by the manufacturer of the vehicle for the vehicle type.

To identify the correct tire inflation pressure, please note the following:

- Tire sizes of the vehicle.
- Maximum speed for driving.

## Checking the tire pressure

### General information

Tires heat up while driving. The tire pressure increases with the tire temperature.

Tires have a natural, consistent tire pressure loss.

The displays of inflation devices may under-read by up to 0.1 bar/2 psi.

### Checking using tire inflation pressure specifications in the tire inflation pressure table

The tire inflation pressure specifications in the tire inflation pressure table only relate to cold tires or tires at the same temperature as the ambient temperature.

Only check the tire inflation pressure levels when the tires are cold, i.e.:

- Distance travelled of max. 1.25 miles/2 km has not been exceeded.
- If the vehicle has not moved again for at least 2 hours after a trip.



1. Determine the intended tire inflation pressure levels for the mounted tires.
2. Check the tire inflation pressure in all four tires, using a pressure gage, for example.
3. Correct the tire inflation pressure if the actual tire inflation pressure deviates from the intended tire inflation pressure.
4. Check whether all valve caps are screwed onto the tire valves.

### After correcting the tire pressure

For flat tire monitor: reinitialize flat tire monitor.

For Tire Pressure Monitor: reset the Tire Pressure Monitor.

### Tire pressures


To achieve optimum driving comfort, note the tire inflation pressure specifications in the Tire inflation pressure table, refer to page 241, and adjust as needed.

These pressure values can also be found on the tire pressure label on the driver's door pillar.

Do not exceed a speed of 100 mph/  
160 km/h.

## Tire pressure values

### COOPER SE

Tire size	Pressure specifications in bar/PSI	
Specifications in bar/PSI with cold tires		
195/55 R 16 87 W	2.4 / 35	2.2 / 32
195/55 R 16 87 H M+S		
205/45 R 17 88 V XL A/S	2.6 / 38	2.4 / 35
205/45 R 17 88 W XL		
205/45 R 17 88 V XL M+S		
175/60 R 16 86 H XL M+S	2.8 / 41	2.6 / 38
185/50 R 17 86 H XL M+S		

## Tire marking

### Tire size

205/45 R 17 84 V

205: nominal width in mm

45: cross-sectional relationship in %

R: radial tire code

17: rim diameter in inches

84: load bearing capacity

V: speed code letter

ZR tires: reinforced radial tire for speeds exceeding 150 mph/240 km/h

## Maximum tire load

Maximum tire load is the maximum permissible weight for which the tire is approved.

Locate the maximum tire load on the tire sidewall and the Gross Axle Weight Rating – GAWR – on the certification label on the driver’s door pillar. Divide the tire load by 1.1. It must be greater than one-half of the vehicle’s Gross Axle Weight Rating – GAWR. Note, front vs. rear GAWR and tire loads, respectively.

## Speed letter

Designation	Maximum speed
Q	up to 100 mph/160 km/h
R	up to 106 mph/170 km/h
S	up to 112 mph/180 km/h
T	up to 118 mph/190 km/h
H	up to 131 mph/210 km/h
V	up to 150 mph/240 km/h
W	up to 167 mph/270 km/h
Y	up to 186 mph/300 km/h

## Tire Identification Number

DOT code: DOT xxxx xxx 0123

xxxx: manufacturer code for the tire brand

xxx: tire size and tire design

0123: tire age

Tires with DOT codes meet the guidelines of the U.S. Department of Transportation.

## Tire age

### Recommendation

Regardless of the tire tread depth, replace tires at least every 6 years.

## Manufacture date

You can find the manufacture date of the tire on the tire sidewall.

Designation	Manufacture date
DOT ... 0123	1st week of 2023

## Uniform Tire Quality Grading

Quality grades can be found where applicable on the tire sidewall between tread shoulder and maximum section width.

E.g.: Treadwear 200; Traction AA; Temperature A

## DOT Quality Grades

Treadwear

Traction AA A B C

Temperature A B C

All passenger vehicle tires must conform to Federal Safety Requirements in addition to these grades.

## Treadwear

The treadwear grade is a comparative rating based on the wear rate of the tire when tested under controlled conditions on a specified government test course. E.g., a tire graded 150 would wear one and one-half, 1 g, times as well on the government course as a tire graded 100. The relative performance of tires depends upon the actual conditions of their use, however, and may depart significantly from the norm due to variations in driving habits, service practices and differences in road characteristics and climate.

## Traction

The traction grades, from highest to lowest, are AA, A, B, and C.

Those grades represent the tire’s ability to stop on wet pavement as measured under

controlled conditions on specified government test surfaces of asphalt and concrete. A tire marked C may have poor traction performance.

The traction grade assigned to this tire is based on straight-ahead braking traction tests, and does not include acceleration, cornering, hydroplaning, or peak traction characteristics.

## Temperature

The temperature grades are A, the highest, B, and C, representing the tire's resistance to the generation of heat and its ability to dissipate heat when tested under controlled conditions on a specified indoor laboratory test wheel. Sustained high temperature can cause the material of the tire to degenerate and reduce tire life, and excessive temperature can lead to sudden tire failure. The grade C corresponds to a level of performance which all passenger car tires must meet under the Federal Motor Vehicle Safety Standard No. 109. Grades Band A represent higher levels of performance on the laboratory test wheel than the minimum required by law.

### Warning

The temperature grade for this tire is established for a tire that is properly inflated and not overloaded. Excessive speed, underinflation, or excessive loading, either separately or in combination, can cause heat buildup and possible tire failure.

## Runflat tires

Runflat tires, refer to page 246, are labeled with a circular icon containing the letters RSC marked on the tire sidewall.

## M+S

Winter and all-season tires with better cold weather performance than summer tires.

## Tire tread

### Summer tires

Do not drive with a tire tread depth of less than 0.12 in/3 mm, otherwise there is an increased risk of aquaplaning.


### Winter tires

Do not drive with a tire tread depth of less than 0.16 in/4 mm, as such tires are less suitable for winter driving conditions.

### All-season tires

Do not drive with a tire tread depth of less than 0.16 in/4 mm, as such tires are less suitable for winter driving conditions.

## Minimum tread depth

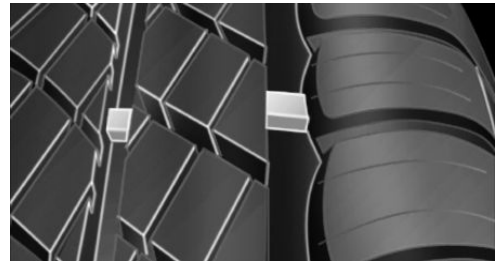

Distributed over the tire circumference are the tire manufacturer's wear indicators with a height of at least 0.06 in/1.6 mm, which serve as an indicator of tire tread wear.

The positions of the wear indicators are marked on the tire sidewall with TWI, Tread Wear Indicator.

Irrespective of the wear indicators, observe the statutory regulations on the minimum tread depth.

## Tire damage

### General information

Check your tires regularly for damage, foreign bodies lodged in the tread, and tread wear.

Driving over rough or damaged road surfaces, as well as debris, curbs and other obstacles can cause serious damage to wheels, tires and suspension parts. This is more likely to occur with low-profile tires, which provide less cushioning between the wheel and the road. Be careful to avoid road hazards and reduce your speed, especially if the vehicle is equipped with low-profile tires.

Indications of tire damage or other vehicle malfunctions:

- Unusual vibrations.
- Unusual tire or running noises.
- Unusual handling such as a strong tendency to pull to the left or right.
- Uneven wear pattern, e.g., increased wear in the area of the tire shoulder.

Damage can be caused by the following situations, for instance:

- Driving over curbs.
- Road damage.
- Tire pressure too low.
- Vehicle overloading.
- Incorrect tire storage.

### Safety information

#### Warning

Damaged tires can lose tire inflation pressure, which can lead to loss of vehicle control. There is a risk of accident. If tire damage is suspected while driving, immediately reduce speed and stop. Have wheels and tires checked. To do so, drive carefully to an authorized service center

or another qualified service center or repair shop. Have vehicle towed or transported as needed. Do not repair damaged tires, but have them replaced.

#### Warning

Tires can become damaged by driving over obstacles, e.g., curbs or road damage, at high speed. Larger wheels have a smaller tire cross-section. The smaller the tire cross-section, the higher the risk of tire damage. There may be a risk of accidents and risk of damage to property. If possible, avoid driving over objects or road conditions that may damage tires, or drive over them slowly and carefully.

## Exchanging wheels and tires

### Mounting and wheel balancing

Have wheels and tires mounted and balanced by an authorized service center or another qualified service center or repair shop.

### Light-alloy rim MINI Electric Power Spoke 2-Tone



A balance weight is required for wheel balancing.

The balance weight is available as a special tool from an authorized service center or

another qualified service center or repair shop.

Have wheels balanced only by an authorized service center or another qualified service center or repair shop.

## Approved wheels and tires

### General information

Only certain wheel/tire combinations are suitable depending on vehicle and equipment. The vehicle manufacturer determines wheel/tire combinations on the basis of the following criteria:

- Tire size, e.g., tire width, aspect ratio.
- Wheel size, e.g., rim diameter, offset.

Ask an authorized service center or another qualified service center or repair shop about wheels and tires that are suitable for the vehicle as well as special equipment.

### Safety information

#### Warning

Wheels and tires that are not suitable for the vehicle can damage parts of the vehicle. There is a risk of accident. The vehicle manufacturer recommends that you use only wheels and tires that have been approved as suitable for the vehicle type.

#### Warning

Unsuitable wheel/tire combinations will impair vehicle handling and a number of system functions, such as the Antilock Braking System or Dynamic Stability Control. There is a risk of accident. The vehicle manufacturer recommends that you use only wheels and tires that have been approved as suitable for the vehicle type. Following tire damage, have the original

wheel/tire combination remounted on the vehicle as soon as possible.

## Recommended tire brands



Tire types are developed for each vehicle and optimized specifically for the individual requirements of that vehicle, e.g.:

- Handling.
- Comfort.
- Noise characteristics.

Specially developed tires are marked with a star on the tire sidewall. After replacing wheels and tires, the vehicle manufacturer recommends using star-marked tires again. The vehicle manufacturer recommends that you use tires of the same make and tread design.

### New tires

Tire traction is not optimal due to manufacturing circumstances when tires are brand new.

Drive conservatively for the first 200 miles/300 km.

### Retreaded tires

#### Warning

Retreaded tires can have different tire casing structures. With advanced age the service life can be limited. There is a risk of accident. The manufacturer of the ve-

Vehicle does not recommend the use of re-treaded tires.

## Winter tires



Winter tires are recommended for operating on winter roads.

Winter tires can be identified by the icon with mountain and snowflake, as well as the M+S marking on the tire sidewall.

All-season tires with the M+S designation, but without icon with mountain and snowflake, have better winter characteristics than summer tires but generally do not achieve the performance of winter tires.

## Maximum speed of winter tires

If the maximum speed of the vehicle is higher than the permissible speed for the winter tires, then attach a sign showing the permissible maximum speed in the field of vision. The info label is available from an authorized service center or another qualified service center or repair shop.

With winter tires mounted, observe and do not exceed the permissible maximum speed.

## Changing runflat tires

When changing from runflat tires to standard tires, it must be ensured that the vehicle contains an emergency wheel or tire mobility kit. For more information, contact an authorized service center or another qualified service center or repair shop.

## Wheel change between axles

Different abrasion patterns can occur on the front and rear axles depending on individual driving conditions. The tires can be rotated in pairs between the axles to achieve even abrasion. For more information, contact an authorized service center or another qualified service center or repair shop. After changing, check the tire pressure and correct, if needed.

## Storing tires

### Tire pressure

Do not exceed the maximum tire inflation pressure indicated on the tire sidewall.

### Storage

Store wheels and tires in a cool, dry and dark place.

Always protect tires against all contact with oil, grease, and solvents.

Do not leave tires in plastic bags.

Remove dirt from wheels or tires.

## Runflat tires

### Principle

Runflat tires permit continued driving under limited conditions even in the event of a complete tire pressure loss.

### General information

The wheels are composed of tires that are self-supporting to a limited degree.

The reinforcement of the sidewall allows the tire to remain drivable to a limited degree in the event of a tire pressure loss.

Follow the instructions for continued driving with a flat tire.

## Safety information

### Warning

The vehicle handles differently when a runflat tire has insufficient or no tire pressure; for instance, reduced directional stability when braking, braking distances are longer and the self-steering properties will change. There is a risk of accident. Drive moderately and do not exceed a speed of 50 mph/80 km/h.

## Identification



Runflat tires are labeled with a circular icon containing the letters RSC marked on the tire sidewall.

## Repairing a flat tire

### Safety precautions

- Park the vehicle as far away as possible from passing traffic and on solid ground.
- Turn on the hazard warning system.
- Secure the vehicle against rolling away by setting the parking brake.
- Turn the steering wheel until the front wheels are in the straight-ahead position and engage the steering wheel lock.
- Have all vehicle occupants get out of the vehicle and ensure that they remain out-

side the hazardous area in a safe place, such as behind a guardrail.

- If necessary, set up a warning triangle at an appropriate distance.

## Tire repair set

### Principle

With the tire repair set, minor tire damage can be sealed temporarily to enable continued driving.

### General information

- The filled in tire sealant closes the damage from the inside when it hardens.
- Follow the instructions on using the tire repair set found on the compressor and sealant bottle.
- The use of a tire repair set can be ineffective if the tire puncture measures above approx. 0.16 in/4 mm.
- Do not remove foreign objects that have penetrated the tire. Remove foreign objects only when they are visibly protruding from the tire.
- The compressor can be used to check the tire inflation pressure.


### Overview

#### Storage

Depending on the equipment, storage for the tire repair set is provided as follows:


- In the cargo area under the cargo floor panel.
- In the cargo area on the left or right side.
- In the cargo area behind a side trim panel.

### Sealant bottle and filler hose

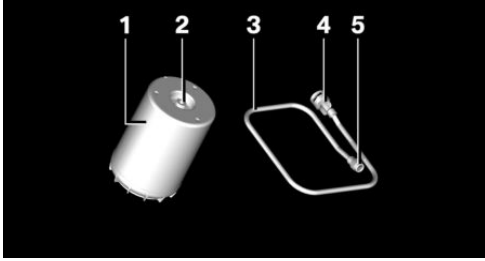

- 1 Sealant bottle
- 2 Sealant bottle outlet
- 3 Filler hose
- 4 Sealant bottle connection
- 5 Wheel valve connection

### Compressor

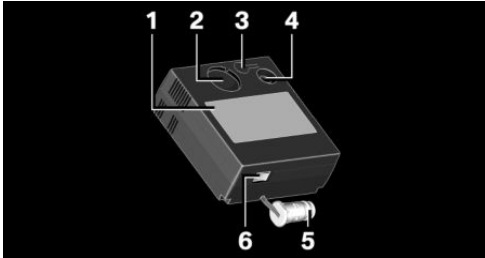

- 1 Compressor
- 2 Tire pressure display
- 3 Pressure reducing valve button
- 4 Sealant bottle mount
- 5 Connector for socket
- 6 On/off switch


### Safety precautions

- Park the vehicle as far away as possible from passing traffic and on solid ground.
- Turn on the hazard warning system.
- Set the parking brake.


- Turn the steering wheel until the front wheels are in the straight-ahead position and engage the steering wheel lock.
- As soon as permitted by the traffic flow, have all vehicle occupants get out and make sure that they remain outside the hazardous area such as behind a guard-rail.
- If necessary, set up the hazard triangle or hazard warning lights at an appropriate distance.
- Remove the warning label for the maximum permissible speed from the compressor and attach it in the visible area in the vehicle interior.
- Remove the warning label from the tire sealant bottle and attach it to the rim.

### Preparing the tire repair set

1. Insert the sealant bottle into the mount on the housing of the compressor.

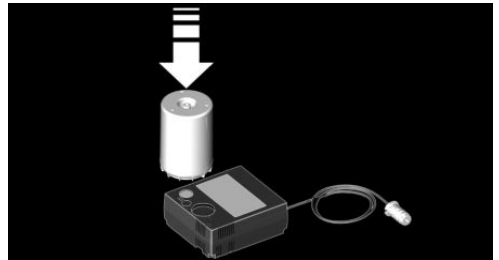


2. Turn the sealant bottle clockwise by 90° to the stop.

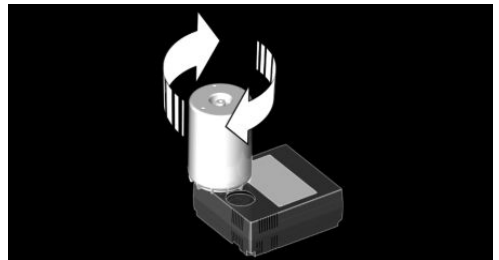




3. Connect the filler hose to the outlet of the sealant bottle and turn clockwise by 90° to the stop.

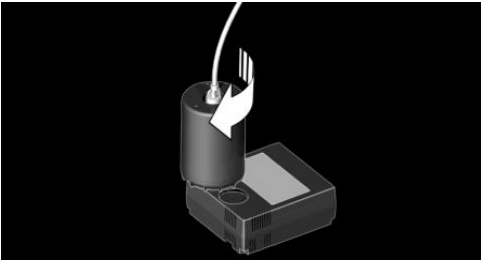

4. Unscrew the valve cap from the wheel and screw the connecting piece of the filler hose onto the valve.

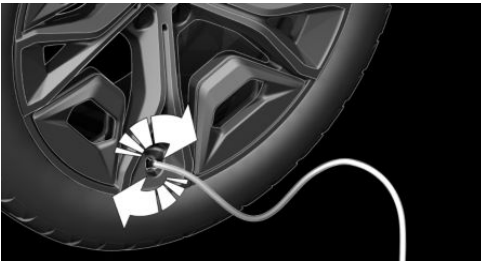

5. With the compressor switched off, insert the connector into the power socket in the vehicle interior.

## Filling the tire with sealing compound

### Safety information

#### NOTICE


The compressor can overheat during extended operation. There is a risk of damage to property. Do not run the compressor for more than 10 minutes.

### Filling the tire with sealing compound

1. With standby state or drive-ready state switched on, switch on the compressor.

Let the compressor run for max. 10 minutes to fill in the tire sealant and reach a tire pressure of 2.5 bar/36 psi.

While the tire is being filled with tire sealant, the tire pressure can briefly reach approx. 6 bar/87 psi. Do not turn off the compressor in this phase.

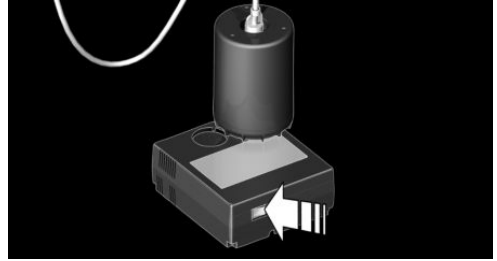

2. Switch off the compressor.

## Checking the tire pressure

Read the tire pressure on the tire pressure display of the compressor. The tire pressure must be at least 2.5 bar/36 psi.

### Tire pressure too high

If the tire pressure is too high, reduce the tire pressure with the pressure reducing valve on the compressor.

### Minimum tire inflation pressure is not reached

Do not continue driving unless a minimum tire pressure of 2.5 bar/36 psi is reached. Contact an authorized service center or another qualified service center or repair shop.

### Minimum tire inflation pressure is reached

1. Pull the connector out of the socket in the vehicle interior.
2. Disconnect the hose from the sealant bottle and the valve on the wheel.


3. Unscrew the valve cap.
  4. Stow the tire repair set in the cargo area.
  5. Immediately drive 5 miles/10 km to ensure that the tire sealant is evenly distributed in the tire.
- Do not exceed the permissible maximum speed of 50 mph/80 km/h.

If possible, do not drive at speeds less than 12 mph/20 km/h.


Tire sealant may spray from the damaged area during the initial wheel rotations.

### Adjusting the tire pressure

1. Stop at a suitable location.
2. Connect the hose directly to the compressor and turn clockwise by 90° until it audibly engages.

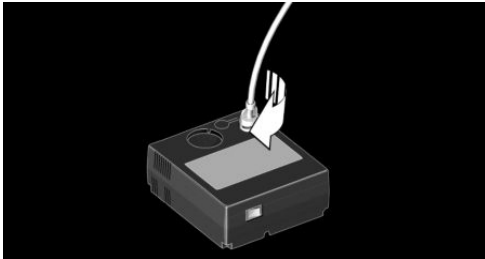

3. Unscrew the valve cap from the wheel and screw the connecting piece of the hose onto the valve.

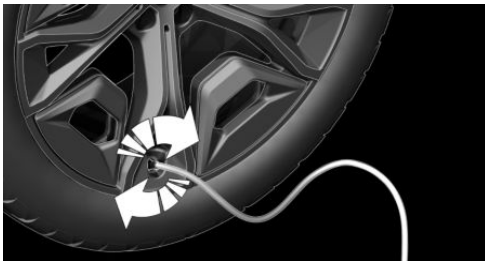

4. Insert the connector into the socket in the vehicle interior.
5. Read the tire pressure on the tire pressure display of the compressor.  
Do not continue driving unless a minimum tire pressure of 1.3 bar/19 psi is displayed. Contact an authorized service center or another qualified service center or repair shop.
6. Correct the tire pressure to 2.5 bar/36 psi.
  - Increase tire pressure: with standby or drive-ready state turned on, turn on the compressor and let it run for a maximum of 10 minutes.
  - Reduce tire pressure: press the pressure reducing valve button on the compressor.

### Remove and stow the tire repair set

1. Switch off the compressor.
2. Pull the connector out of the socket in the vehicle interior.
3. Disconnect the hose from the compressor and the valve on the wheel.
4. Unscrew the valve cap.
5. Stow the tire repair set in the cargo area.

### Continuing the trip

Do not exceed the permissible maximum speed of 50 mph/80 km/h.

Do not exceed a maximum distance traveled of 125 miles/200 km.

Re-initialize the flat tire monitor or reset the Tire Pressure Monitor.

Replace the faulty tire and the sealant bottle of the tire repair set promptly.

## System limits

If the tire cannot be made drivable, contact an authorized service center or another qualified service center or repair shop.

With the Tire Pressure Monitor: using sealant can damage the wheel electronics. In this case, have the electronics checked and replaced at the next opportunity.

## Snow chains

### General information

The manufacturer of the vehicle has determined certain wheels and tires to be suitable for operation on the vehicle.

Follow the snow chain manufacturer's instructions.

Do not initialize the flat tire monitor after mounting snow chains, as doing so may result in incorrect readings.

Do not reset the Tire Pressure Monitor after mounting snow chains, as doing so may result in incorrect readings.

When driving with snow chains, briefly activate Dynamic Traction Control, if needed.

### Safety information

#### Warning

Mounting snow chains on unsuitable tires can cause the snow chains to come into contact with vehicle parts. There may be a risk of accidents or risk of damage to property. Only mount snow chains on tires that are designated by their manufacturer as suitable for the use of snow chains.

#### Warning

Insufficiently tight snow chains may damage tires and vehicle components. There may be a risk of accidents or risk of damage to property. Make sure that the snow chains are always sufficiently tight. Retighten as needed according to the snow chain manufacturer's instructions.

### Fine-link snow chains

The manufacturer of the vehicle recommends the use of fine-link snow chains. Certain types of fine-link snow chains have been tested by the manufacturer of the vehicle and recommended as road-safe and suitable.

For information on suitable snow chains, contact an authorized service center or another qualified service center or repair shop.

### Use

Use only in pairs on the front wheels, equipped with the tires of the following size:

- 175/60 R 16.
- 185/50 R 17.

### Maximum speed with snow chains

Do not exceed a speed of 30 mph/50 km/h when using snow chains.

## Changing wheels/tires

### General information

When using runflat tires or a flat tire kit, a wheel does not always need to be changed immediately in case of a breakdown when there is a tire pressure loss due to a flat tire. If necessary, a suitable wheel change tool, e.g., a jack, is available as an accessory from

an authorized service center or another qualified service center or repair shop.

## Safety information

### Warning

The jack is only provided for short-term lifting of the vehicle for wheel changes. Even if all safety precautions are observed, there is a risk of the raised vehicle falling if the jack tips over. There is a risk of injury or danger to life. When the vehicle is raised with the jack, do not lie under the vehicle and do not switch on the drive-ready state.

### Warning

Supports such as wooden blocks under the jack reduce the load-carrying capacity of the jack to bear weight. The load-carrying capacity of the wooden blocks may be exceeded and the vehicle may tip over. There is a risk of injury or danger to life. Do not place supports under the jack.

### Warning

The jack, issued by the vehicle manufacturer, is provided in order to perform a wheel change in the event of a breakdown. The jack is not designed for frequent use, e.g., changing from summer to winter tires. Using the jack frequently may cause it to become jammed or damaged. There is a risk of injury and risk of damage to property. Only use the jack to change an emergency or spare wheel in the event of a breakdown.

### Warning

The jack may slip on soft, uneven, or slippery ground, e.g., snow, ice, tiles, etc. There is a risk of injury. If possible, change the wheel on a flat, solid, slip-resistant surface.

### Warning

The jack is optimized for lifting the vehicle and for the jacking points on the vehicle only. There is a risk of injury. Do not lift any other vehicle or cargo using the jack.

### Warning

When the jack is not inserted into the jacking point provided for this purpose, the vehicle may be damaged or the jack may slip when it is being cranked up. There is a risk of injury or risk of damage to property. When cranking up the jack, ensure that it is inserted in the jacking point next to the wheel well.

### Warning

A vehicle that is raised on a jack may fall off of the jack if lateral forces are exerted on it. There is a risk of injury and risk of damage to property. While the vehicle is raised, do not exert lateral effort on the vehicle or pull abruptly on the vehicle. Have a stuck wheel removed by an authorized service center or another qualified service center or repair shop.

**⚠ Warning**

Incorrect handling of the jack can damage the vehicle's underbody and expose high-voltage components. There is a risk of injury or risk of damage to property. When cranking up the jack, ensure that it is inserted in the jacking point next to the wheel well. Make sure not to damage any of the underbody parts.

**⚠ NOTICE**

Using an impact wrench to loosen or tighten the wheel lock bolt can damage the wheel lock bolt. There is a risk of damage to property. Only use a lug wrench to loosen and tighten the wheel lock bolt.

## Securing the vehicle against rolling away

### General information


The vehicle manufacturer recommends to additionally secure the vehicle against rolling away when changing a wheel.

### On a level surface



Place wheel chocks or other suitable objects in front and behind the wheel that is diagonal to the wheel to be changed.

### On a slight downhill gradient

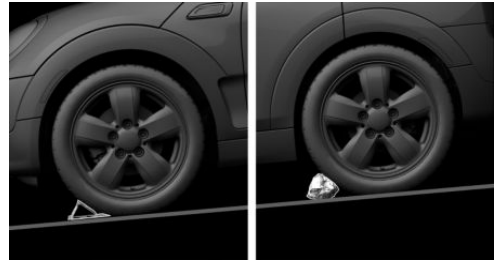


If you need to change a wheel on a slight downhill grade, place chocks and other suitable objects, for instance rocks, under the wheels of both the front and rear axles against the rolling direction.

### Preparing the vehicle

- Park the vehicle on solid and non-slip ground at a safe distance from road traffic.
- Turn on the hazard warning system.
- Set the parking brake.
- Engage a gear or move the selector lever to position P.
- As soon as permitted by the traffic flow, have all vehicle occupants get out of the vehicle and ensure that they remain outside the hazardous area in a safe place, such as behind a guardrail.
- Depending on the vehicle equipment, get wheel change tools and, if necessary, the emergency wheel from the vehicle.
- If necessary, set up a warning triangle or portable hazard warning light at an appropriate distance.
- Secure the vehicle additionally against rolling away.
- Loosen the lug bolts a half turn.

## Jacking points

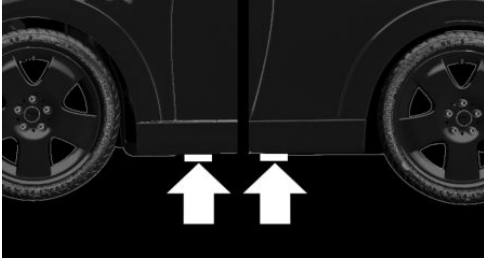


The jacking points for the vehicle jack are located at the marked positions.

## Jacking up the vehicle


### Warning

Hands and fingers can be jammed when using the jack. There is a risk of injury. Comply with the described hand position and do not change this position while using the jack.


1. Hold the vehicle jack with one hand, arrow 1, and grasp the jack crank handle or lever with your other hand, arrow 2.

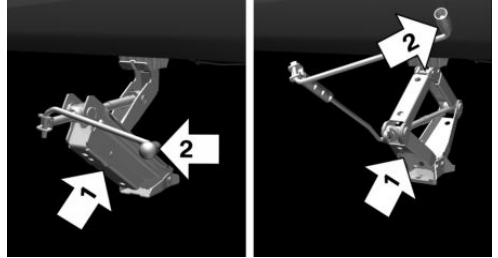

2. Insert the jack into the rectangular recess of the jacking point closest to the wheel to be changed.

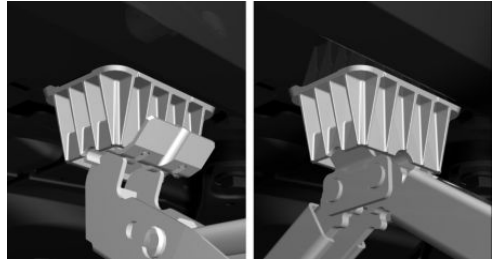


3. Extend the jack by turning the jack crank handle or lever clockwise.

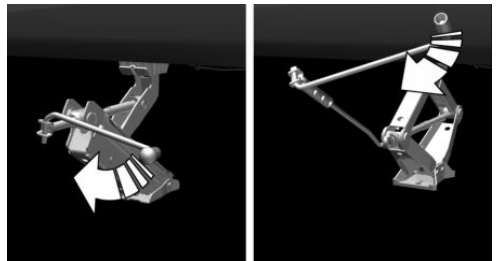


4. Take your hand away from the jack as soon as the jack is under load and continue turning the jack crank handle or lever with one hand.

5. Make sure that the car jack foot extends vertically and is at a right angle beneath the jacking point.

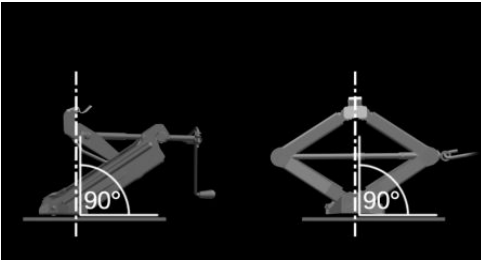

6. Make sure that the car jack foot is vertical and at a right angle beneath the jacking point after extending the vehicle jack.

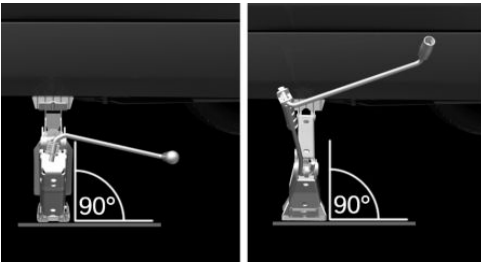

7. Crank the vehicle up until the vehicle jack has the entire surface on the ground and the relevant wheel is maximum 1.2 inches/3 cm above ground.

## Mounting a wheel

Mount one emergency wheel only, as required.

1. Unscrew the lug bolts.
2. Remove the wheel.
3. Put the new wheel or emergency wheel on and screw in at least two lug bolts in a crosswise pattern until hand-tight.

If non-original light-alloy wheels of the vehicle manufacturer are mounted, the accompanying lug bolts may have to be used as well.

4. Hand-tighten the remaining lug bolts and tighten all lug bolts well in a crosswise pattern.
5. Turn the jack crank handle counterclockwise to retract the jack and lower the vehicle.
6. Remove the jack and stow it securely.

## After the wheel change

1. Tighten the lug bolts crosswise. The tightening torque is 101 lbs ft/140 Nm.
2. Stow the faulty wheel in the cargo area, if necessary.  
The faulty wheel cannot be stored under the cargo area floor because of its size.
3. Check tire inflation pressure at the next opportunity and correct as needed.
4. Reinitialize the Flat Tire Monitor.  
Reset the Tire Pressure Monitor again.
5. Check to make sure the lug bolts are tight with a calibrated torque wrench.
6. Drive to the nearest authorized service center or another qualified service center or repair shop, then have the damaged tire renewed.


# Engine compartment

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily avail-

able in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Overview

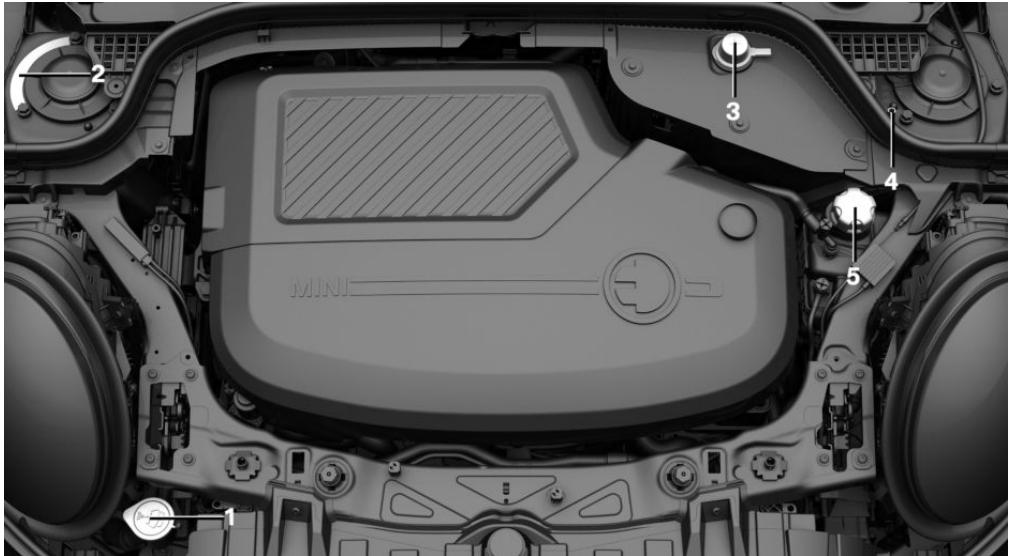

- |   |                                  |   |                                  |
|---|----------------------------------|---|----------------------------------|
| 1 | Filler neck for washer fluid     | 4 | Jump-starting, negative terminal |
| 2 | Vehicle identification number    | 5 | Coolant reservoir                |
| 3 | Jump-starting, positive terminal |   |                                  |



## Hood

### Safety information

#### Warning

Improperly executed work in the engine compartment can damage vehicle components and impair vehicle functions. There is a risk of an accident and damage to property. The manufacturer of the vehicle recommends that, in the effort to avoid such risks, work in the engine compartment be performed by an authorized service center or another qualified service center or repair shop.

#### Warning

The engine compartment accommodates moving components. Certain components in the engine compartment can also move with the vehicle switched off, for instance the radiator fan. There is a risk of injury. Do not reach into the area of moving parts. Keep articles of clothing and hair away from moving parts.

#### Warning

There are protruding parts, for instance locking hooks, on the inside of the hood. There is a risk of injury. If the hood is open, pay attention to protruding parts and keep clear of these areas.

#### Warning

An incorrectly locked hood can open while driving and restrict the view. There is a risk of accident. Stop immediately and correctly close the hood.

#### Warning

Body parts can be jammed when opening and closing the hood. There is a risk of injury. Make sure that the travel path of the hood is clear during opening and closing.

#### NOTICE

Folded-away wipers can be jammed when the hood is opened. There is a risk of damage to property. Make sure that the wipers with the wiper blades mounted are folded down onto the windshield before opening the hood.

#### NOTICE

When the hood is closed, it must engage on both sides. Pressing again can damage the hood. There is a risk of damage to property. Open the hood again and then close it energetically. Avoid pressing again.

### Opening the hood

1. Pull lever, arrow 1.  
Hood is unlocked.



2. After the lever is released, pull the lever again, arrow 2.  
Hood can be opened.

### Indicator/warning lights

When the hood is opened, a Check Control message is displayed.

### Closing the hood



Energetically close the hood from approx. 20 in/50 cm.

The hood must engage on both sides.

# Coolant

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## General information

Coolant consists of water and coolant additive.

Not all commercially available coolant additives are suitable for the vehicle. The vehicle manufacturer recommends using coolant with the BMW LC-18 specification. Do not mix coolant additives of different colors. Use a 50:50 mixing ratio of water to coolant additive. Information on suitable coolant additives can be provided by an authorized service center or another qualified service center or repair shop.

## Safety information

### Warning

With the drivetrain hot and the cooling system open, coolant can escape and lead to scalding. There is a risk of injury. Only open the cooling system with the drivetrain cooled down.

### Warning

Additives are harmful and incorrect additives can damage the drivetrain. There is a risk of injury and risk of damage to property. Do not allow additives to come into contact with skin, eyes or articles of clothing. Use suitable additives only.

### NOTICE

Loss of coolant may damage the drivetrain. There is a risk of damage to property. Make sure that there is sufficient coolant in the reservoir at all times. Always have coolant added by an authorized service center or another qualified service center or repair shop.

## Coolant level

### Checking


There are yellow minimum and maximum marks in the coolant reservoir.

1. Allow the drivetrain to cool down.
2. Open the hood, refer to page [257](#).
3. Turn the lid of the coolant reservoir slightly counterclockwise to allow any

excess pressure to dissipate, then open it.



4. Open the coolant reservoir lid.
5. The coolant level is correct if it lies between the minimum and maximum marks in the filler neck.

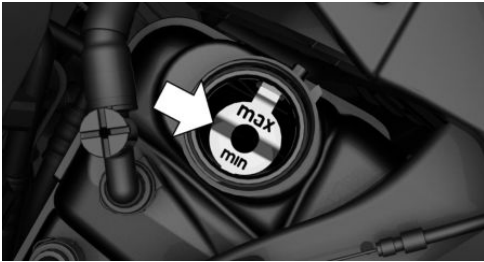

6. Close the lid.

When the coolant level is low, check the cooling system and add coolant. Have the cooling system checked and coolant topped up by an authorized service center or another qualified service center or repair shop.

## Disposal



Comply with the relevant environmental protection regulations when disposing of coolant and coolant additives.

# Maintenance

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## MINI maintenance system

The maintenance system provides service notifications and thereby provides support in maintaining road safety and the operational reliability of the vehicle.

In some cases, scopes and intervals of the maintenance system may vary according to the country version. Replacement work, spare parts, fuels and lubricants, and wear materials are calculated separately. Further information is available from an authorized service center or another qualified service center or repair shop.

## Safety information

### Warning

Improperly performed work, in particular maintenance and repair on the high-voltage system, can lead to electric shock. There is a risk of injury, fire and danger to life.

The manufacturer of the vehicle recommends that the work on the vehicle, in particular maintenance and repair, be performed by an authorized service center or another qualified service center or repair shop.

## Condition Based Service

### Principle

Condition Based Service determines the maintenance recommendation using sensors and special algorithms that take into account the operating conditions of the vehicle.

The system makes it possible to adapt the amount of maintenance corresponding to your user profile.

### General information

Information on service notifications, refer to page 126, can be displayed on the control display.

### Service data in the vehicle key

Information on the service notifications is continuously stored in the vehicle key. The authorized service center can read this data out and suggest a maintenance scope for the vehicle.

Therefore, hand the service advisor the vehicle key with which the vehicle was driven most recently.

### Stationary periods

Stationary periods during which the vehicle battery was disconnected are not taken into account.

Have an authorized service center or another qualified service center or repair shop perform time-dependent maintenance procedures, e.g., checking the brake fluid, engine oil, and microfilter/activated-charcoal filter.

## Maintenance Booklet for US Models

Please consult your Maintenance Booklet for additional information on the performance of service and maintenance work.

The manufacturer of the vehicle recommends that maintenance and repair be performed by an authorized service center or another qualified service center or repair shop. Records of regular maintenance and repair work should be retained.

## Diagnostic socket

### General information

Devices connected to the diagnostic socket will trigger the alarm system after locking the vehicle. Remove devices connected to the diagnostic socket before locking the vehicle.


### Safety information

#### NOTICE

The socket for Onboard Diagnosis is an intricate component intended to be used in conjunction with specialized equipment to check the vehicle's primary emissions system. Improper use of the socket for Onboard Diagnosis, or contact with the socket for Onboard Diagnosis for other than its intended purpose, can cause vehicle malfunctions and creates risks of

personal and property damage. Given the foregoing, the manufacture of the vehicle strongly recommends that access to the socket for Onboard Diagnosis be limited to an authorized service center or another qualified service center or repair shop or other persons that have the specialized training and equipment for purposes of properly utilizing the socket for Onboard Diagnosis.

### Position

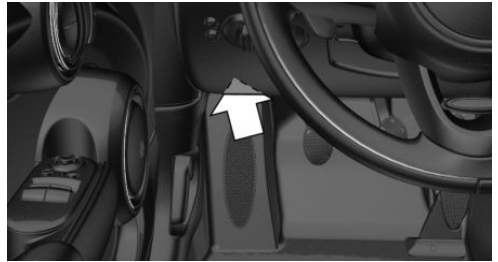

On the driver's side, there is a socket for onboard diagnosis to check components that are relevant for the vehicle's emission mix.

# Replacing components

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Onboard vehicle tool kit



Depending on the vehicle equipment, the onboard vehicle tool kit is located on the right side under the cargo floor panel or in a bag on the right side of the cargo area.

After use, secure the bag with the onboard vehicle tool kit on a lashing eye again.

## Wiper blades

### Safety information

#### NOTICE


The window may sustain damage if the wiper falls onto it without the wiper blade installed. There is a risk of damage to property. Hold the wiper firmly when changing the wiper blade. Do not fold in or switch on the wiper without a wiper blade installed.

#### NOTICE


Folded-away wipers can be jammed when the hood is opened. There is a risk of damage to property. Make sure that the wipers with the wiper blades mounted are folded down onto the windshield before opening the hood.

### Replacing the front wiper blades

1. To change the wiper blades, bring wipers into fold-out position.
2. Fold out and hold the wiper arm firmly.
3. Open the wiper blade lock, arrow.

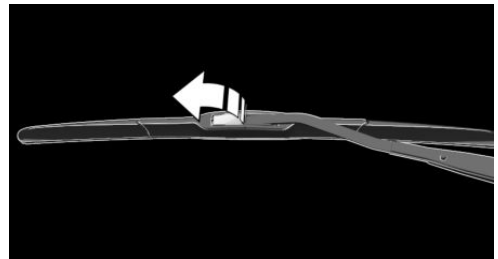


- Pull the wiper blade down out of the holder on the wiper arm, arrow 1.

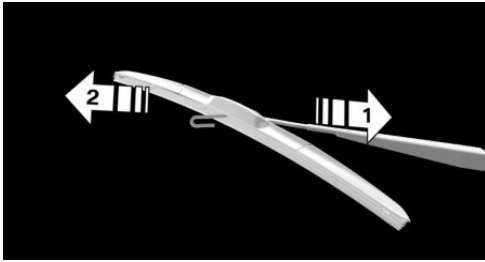

- Pull the wiper blade free from the holder of the wiper arm, arrow 2.
- Insert and lock a new wiper blade in reverse order.
- Fold in the wiper arm.

### Replacing the rear wiper blade

- Fold out and hold the wiper arm firmly.
- Turn back the wiper blade to the stop.

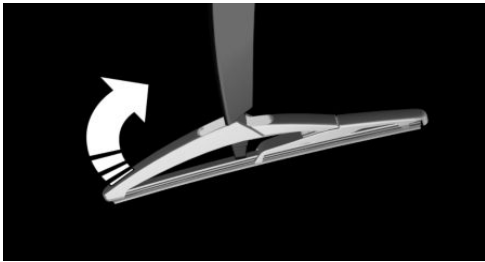

- Push the wiper blade out of the fastening by continuing to turn it to the stop.
- Insert the new wiper blade by following the steps in reverse order. The wiper blade must engage audibly.
- Fold in the wiper arm.

## Light and bulb replacement

### General information

#### Lights and bulbs

Lights and bulbs make an essential contribution to driving safety.

Except for the reversing light, all headlights and lights are designed in LED technology.

The vehicle manufacturer recommends having necessary work performed by an authorized service center or another qualified service center or repair shop if you are unfamiliar with performing this work or if it has not been described here.

A replacement bulb set is available from an authorized service center or another qualified service center or repair shop.

Follow the safety information, refer to page 264.

#### Light-emitting diodes (LEDs)

Some items of equipment use light-emitting diodes installed behind a cover as a light source. These light-emitting diodes are related to conventional lasers and are officially designated as Class 1 light-emitting diodes.

Follow the safety information, refer to page 264.

### Safety information

#### Lights and bulbs

##### Warning

Bulbs can get hot during operation. Contact with the bulbs can cause burns. There is a risk of injury. Only change bulbs after they have cooled off.



**⚠ Warning**

Work on switched-on lighting systems can cause short circuits. There is a risk of injury or risk of damage to property. When working on the lighting system, switch off the lights in question. If necessary, heed the bulb manufacturer's instructions.

**⚠ NOTICE**

Dirty bulbs have a reduced service life. There is a risk of damage to property. Do not hold new glass bulbs with your bare hands. Use a clean cloth or something similar, or hold the bulb by its base.


**Light-emitting diodes (LEDs)****⚠ Warning**

Intense brightness can irritate or damage the retina of the eye. There is a risk of injury. Do not look directly into the headlights or other light sources. Do not remove the LED covers.

**Headlight glass**

The inside of the headlight glass can fog up in cool or humid weather. When driving with the lights switched on, the condensation evaporates after a short time. The headlight glass does not need to be changed.

If, despite driving with the headlights switched on, moisture such as water droplets increasingly forms in the light, have the headlights checked.

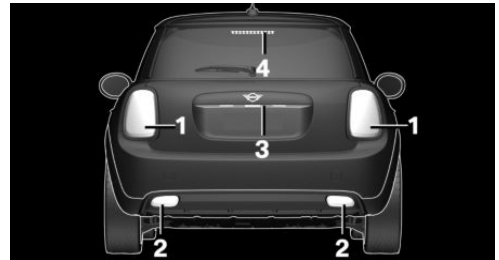**Tail lights, bulb exchange****Overview**

- 1 Side tail lights
- 2 Rear fog lights
- 3 License plate light
- 4 Center brake light

**Side tail lights**


- 1 Tail lights
- 2 Turn signals/brake lights
- 3 Turn signals/brake lights
- 4 Reversing lights

**Side tail lights**

Follow the general instructions on lights and bulbs, refer to page [264](#).

Bulb, reversing lights: P21W.


1. Open the tailgate.
2. Remove left or right cover.

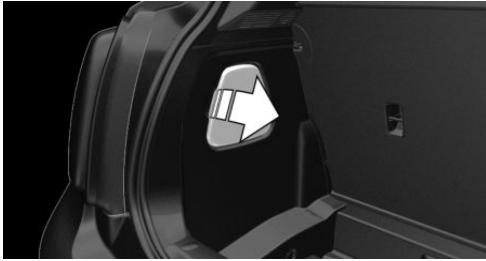

3. Turn the bulb holder for the reversing light, arrow, counterclockwise and remove it.



4. Remove the light bracket from the opening.
5. Press the faulty bulb gently into the socket, turn counterclockwise and remove.

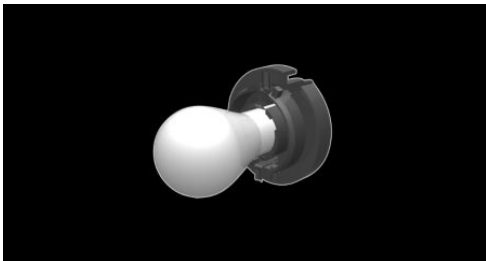

6. Proceed in the reverse order to insert the new bulb and attach the light bracket. Make sure that the light bracket engages in all fasteners.

## Central brake light and license plate lights

Follow the general instructions on lights and bulbs, refer to page 264.

The lights feature LED technology. In the event of a malfunction, contact an authorized service center or another qualified service center or repair shop.

## Vehicle battery

### General information

In addition to the high-voltage battery, the vehicle has a 12 volt vehicle battery. The vehicle battery supplies the onboard electronics with energy.

The battery is maintenance-free.

More information on the battery can be requested from an authorized service center or another qualified service center or repair shop.

### Safety information

#### **⚠ DANGER**

Contact with live components can lead to an electric shock. There is a risk of injury or danger to life. Do not touch any components that are under voltage.

#### **⚠ Warning**

Vehicle batteries that are not compatible can damage vehicle systems and impair vehicle functions. There is a risk of an accident and damage to property. Only vehicle batteries that are compatible with the vehicle type should be installed in the vehicle. Information on compatible ve-

hicle batteries is available at an authorized service center.

## Registering the battery to the vehicle

The vehicle manufacturer recommends having an authorized service center or another qualified service center or repair shop register the vehicle battery to the vehicle after the battery has been changed. Once the battery has been registered again, all comfort features will be available without limitation and any Check Control messages displayed which relate to comfort features will disappear.

## Charging the battery

A charger that is installed in the vehicle supplies the vehicle battery with power. The charger receives the necessary energy from the high-voltage battery, refer to page 228.

## Power interruption

After a power interruption, some equipment needs to be newly initialized or individual settings updated, for example:

- Memory function: store the positions again.
- Time: update.
- Date: update.
- Glass sunroof: initialize the system.

## Disposing of old batteries



Have old batteries disposed of by an authorized service center or another qualified service center or repair shop, or take them to a collection point. Maintain the filled battery in an upright position for transport and storage. Secure the

battery so that it does not tip over during transport.

## Fuses

### Safety information

#### Warning

Incorrect and repaired fuses can overload electrical lines and components. There is a risk of fire. Never attempt to repair a blown fuse. Do not replace a nonworking fuse with a substitute of another color or amperage rating.

### Accessing the fuses

The fuses are located in the glove compartment.

1. Open the glove compartment.
2. Swing the cover down, arrow.



Information on the fuse layout, as well as the positions of any other fuse boxes, is available on the Internet: [www.mini.com/fusecard](http://www.mini.com/fusecard).

Where applicable, information on the fuse layout is also found on a separate sheet in the fuse box.

## Replacing fuses

The vehicle manufacturer recommends having the fuses replaced by an authorized service center or another qualified service center or repair shop.

# Breakdown Assistance

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Hazard warning flashers



The button is located above the control display.

The red light in the button flashes when the hazard warning flashers are activated.

## Warning triangle



The warning triangle is located in the tailgate. To remove, loosen the brackets.

## First-aid kit

### General information

Depending on the vehicle equipment and country-specific version, the vehicle is equipped with a first-aid kit.

Some of the articles have a limited service life.

Check the expiration dates of the contents regularly and replace any expired items promptly.

### Storage

Storage for the first-aid kit is provided in the cargo area.

## MINI Roadside Assistance

### Principle

MINI Roadside Assistance can be contacted if assistance is needed in the event of a breakdown.

## General information

In the event of a breakdown, data on the vehicle's condition is sent to the vehicle manufacturer.

There are various ways of making contact.

- Via a Check Control message, refer to page 120.
- Calling with a mobile phone.


## Prerequisites

- Active MINI Connected contract or equipment version with intelligent emergency call.
- Cellular network reception.
- Standby state is switched on.

## Starting

If the vehicle is equipped with Teleservices, support is offered through Teleservice Diagnosis.

Via the Central Information Display (CID):

1.  "MINI Connected"
2. "MINI Assist"
3. "MINI Roadside Assistance"

The contact to the MINI Roadside Assistance is established.

A telephone number is displayed, if needed. Select to dial the telephone number on a connected mobile phone.

## Teleservice Diagnosis

Teleservice Diagnosis enables the wireless transmission of detailed vehicle data that is important for vehicle diagnosis. This data is transmitted automatically.

## Teleservice Help

Depending on the country, the Teleservice Help enables a more in-depth diagnosis of the vehicle via wireless transmission.

You can launch Teleservice Help by requesting it through the Service Specialist.

1. Park the vehicle in a safe place.
2. Set the parking brake.
3. Control display is switched on.
4. Confirm Teleservice Help.

The driving ability of the vehicle can be restored for specific functions.

If this is not possible, further measures will be initiated, for instance Mobile Assistance vehicle will be informed.

## Emergency Call

### Intelligent emergency call

#### Principle

In case of an emergency, an emergency call can be triggered automatically by the system or manually.

#### General information

Depending on vehicle equipment and national-market version, the vehicle is equipped with an Assist system.

Only press the SOS button in an emergency.

The Intelligent Assist system establishes a connection with the MINI Response Center.

For technical reasons, the emergency call cannot be guaranteed under unfavorable conditions.

## Overview



SOS button in the headliner

### Functional requirements

- Standby state is switched on.
- The Assist system is functional.
- If the vehicle is equipped with intelligent emergency call: the integrated SIM card in the vehicle has been activated.

### Automatic triggering

When certain prerequisites are met, for instance if the airbags deploy, an emergency call is automatically initiated immediately after an accident of corresponding severity. Automatic Collision Notification is not affected by pressing the SOS button.

### Manual triggering

1. Press the cover flap briefly to open it.
  2. Press the SOS button until the LED at the button illuminates green.
- The LED is illuminated green when an emergency call has been initiated.  
If the situation allows, wait in the vehicle until the voice connection has been established.
  - The LED flashes green when a connection to the MINI Response Center has been established.

The MINI Response Center then makes contact with you and takes further steps to help you.

Even if you are unable to respond, the MINI Response Center can take further steps to help you under certain circumstances.

For this purpose, data that serves to determine the necessary rescue measures, for instance the current position of the vehicle when it can be determined, is transmitted to the MINI Response Center.

If you can no longer hear the MINI Response Center through the loudspeakers, the hands-free system, for instance, may be broken. However, the MINI Response Center may still be able to hear you.

The MINI Response Center ends the emergency call.

## Jump-starting

### General information

Have only an authorized service center or another qualified service center or repair shop perform the jump-start.

### Safety information

#### DANGER

Contact with live components can lead to an electric shock. There is a risk of injury or danger to life. Do not touch any components that are under voltage.

## Towing

### Safety information

#### Warning

When towing with Intelligent Safety systems enabled or Cruise Control switched on, individual functions may not work correctly. There is a risk of accident. Switch off all Intelligent Safety systems and Cruise Control before towing.

### Transporting the vehicle

#### General information

Do not transport the vehicle by towing it.

#### Safety information

#### NOTICE

The vehicle can be damaged when towing the vehicle with a single lifted axle. There is a risk of damage to property. The vehicle should only be transported on a loading platform.

#### Warning

The vehicle can become damaged when lifting and securing it.

There is a risk of injury or risk of damage to property.

- Lift the vehicle using suitable means.
- Do not lift or secure the vehicle by its tow fitting, body parts, or suspension parts.

### Pushing the vehicle

To remove a broken-down vehicle from the hazardous area, push it for a short

distance at a speed of no more than 6 mph/10 km/h.

For rolling or pushing the vehicle, refer to page 102.


### Tow truck

#### Warning

The vehicle can become damaged when lifting and securing it.

There is a risk of injury or risk of damage to property.

- Lift the vehicle using suitable means.
- Do not lift or secure the vehicle by its tow fitting, body parts, or suspension parts.

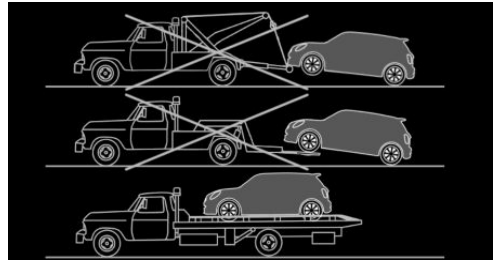

The vehicle should only be transported on a loading platform.

### Towing other vehicles

#### General information

Switch on the hazard warning system, depending on local regulations.

If the electrical system has failed, clearly identify the vehicle being towed by placing a sign or a warning triangle in the rear window.



## Safety information

### Warning

If the approved gross vehicle weight of the towing vehicle is lighter than the vehicle to be towed, the tow fitting can tear off or it will not be possible to control handling. There is a risk of accident. Make sure that the gross vehicle weight of the towing vehicle is heavier than the vehicle to be towed.

### NOTICE

If the tow bar or tow rope is attached incorrectly, damage to other vehicle parts can occur. There is a risk of damage to property. Correctly attach the tow bar or tow rope to the tow fitting.

## Tow bar

The tow fittings used should be on the same side on both vehicles.

If it is impossible to avoid mounting the tow bar at an inclination, note the following:

- Free movement is limited when cornering.
- The tow bar will generate lateral forces if it is secured with an inclination.

## Tow rope


Observe the following notes when using the tow rope:

- Use nylon ropes or straps, which will enable the vehicle to be towed without jerking.
- Make sure the tow rope is not twisted when fastening.
- Check the attachment of the tow fitting and tow rope in regular intervals.

- Do not exceed a towing speed of 30 mph/50 km/h.
- Do not exceed a towing distance of 3 miles/5 km.
- When driving off to tow the vehicle, make sure that the tow rope is taut.

## Tow fitting

### General information

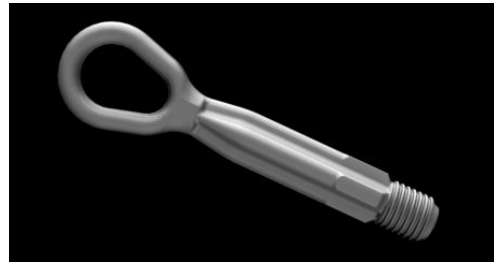

The screw-in tow fitting should always be carried in the vehicle.

The tow fitting can be screwed in at the front or rear of the vehicle.

The tow fitting and the onboard vehicle tool kit, refer to page 263, are together in the cargo area.

Use of the tow fitting:

- Use only the tow fitting provided with the vehicle and screw it in to the stop.
- Use the tow fitting for towing on paved roads only.
- Avoid lateral loading of the tow fitting, for instance do not lift the vehicle by the tow fitting.
- Check the attachment of the tow fitting in regular intervals.

## Safety information

### NOTICE

If the tow fitting is not used as intended, there may be damage to the vehicle or to the tow fitting. There is a risk of damage to property. Follow the notes on using the tow fitting.

## Screw thread for tow fitting



Threaded holes for the tow fitting are located in the front and rear of the vehicle on the right side with respect to the driving direction.

Press on the mark on the edge of the cover to push it out.

## What to do after an accident

### Safety information

### DANGER

Contact with live components can lead to an electric shock. There is a risk of injury or danger to life. After an accident, do not touch any high-voltage components such as orange colored high-voltage cables or parts that are in contact with exposed high-voltage cables.

### Warning

Fluids in the high-voltage battery are corrosive. There is a risk of injury. Do not touch fluids escaping from the high-voltage battery.

## General information

After an accident, comply with the following safety precautions with regard to the high-voltage system:

- Engage the selector lever position P, apply the parking brake and turn off the drive-ready state and standby.
- Secure the crash site.
- Lock the vehicle after exiting.
- Immediately notify rescue forces, police, or firefighters of the fact that the vehicle is equipped with a high-voltage system.
- Do not inhale any gases escaping from the high-voltage battery; if needed, maintain a safe distance from the vehicle.

# Vehicle Care

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily available in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## Washing the vehicle

### General information

Regularly remove foreign bodies such as leaves in the area below the windshield when the hood is raised.

Wash the vehicle frequently, particularly in winter. Intense contamination and road salt can damage the vehicle.

### Safety information

#### Warning

Contact with live components can lead to an electric shock. High voltage is present at the charging connection. There is a risk of injury or danger to life.

The manufacturer of the vehicle recommends that work on the charging connection, for instance cleaning, be performed by an authorized service center or another qualified service center or repair shop.

#### NOTICE

When washing with an open charging socket cover, the charging socket can be damaged. There is a risk of damage to property. Close the charging socket cover before washing. Clean dirt behind the charging socket cover with a cloth.

## Steam cleaners or high pressure cleaners

### Safety information

#### NOTICE

When cleaning with high pressure cleaners, components can be damaged due to the pressure or temperatures being too high. There is a risk of damage to property. Maintain sufficient distance and do not spray too long continuously. Follow the operating instructions for the high pressure cleaners.

### Distances and temperature

- Maximum temperature: 140 °F/60 °C.
- Minimum distance from sensors, cameras, seals and lights: 12 inches/30 cm.
- Minimum distance from glass sunroof: 31.5 in/80 cm.
- Minimum distance from the charging socket cover: 31.5 in/80 cm.

## Automatic car washes or car washes

### Safety information

#### NOTICE

Using a car wash with high pressure washers may result in water penetration of window areas. There is a risk of damage to property. Do not drive into high-pressure car wash systems.

#### NOTICE

Improper use of automatic car washes can cause damage to the vehicle. There is a risk of damage to property. Follow the following instructions:

- Give preference to cloth car washes or those that use soft brushes in order to avoid paint damage.
- Do not drive through a car wash with guide rails higher than 4 in/10 cm to avoid damage to the body.
- Observe the tire width of the guide rail to avoid damage to tires and rims.
- Fold in exterior mirrors to avoid damage to the exterior mirrors.
- Unscrew the rod antenna to avoid the rod antenna breaking off.
- Deactivate the wiper and, if necessary, rain sensor to avoid damage to the window wiper system.

### Driving into a car wash

In car washes, the vehicle must be able to roll freely.

Rolling or pushing the vehicle, refer to page 100.

Some car washes do not permit persons in the vehicle. The vehicle cannot be locked

from the outside when in selector lever position N. A signal is sounded when an attempt is made to lock the vehicle.

### Driving out of a car wash

Ensure that the vehicle key is in the car.

For activating drive-ready state, refer to page 100.

### Lights

Do not rub wet lights dry and do not use abrasive or acidic cleaning agents or cleaning agents containing alcohol.

Soak areas that have been dirtied, for instance from insects, with auto shampoo and wash off with water.

Thaw ice with de-icing spray; do not use an ice scraper.

### After washing the vehicle

After washing the vehicle, apply the brakes briefly to dry them; otherwise, braking effect can be reduced. The heat generated during braking dries brake disks and brake pads and protects them against corrosion.

Completely remove all residues on the windows to minimize loss of visibility due to smearing and to reduce wiper noises and wiper blade wear.

## Vehicle care

### Vehicle care products

#### General information

MINI recommends using vehicle care and cleaning agents from MINI. Suitable vehicle care products are available from an authorized service center or another qualified service center or repair shop.

## Safety information

### Warning

Cleaning agents can contain substances that are dangerous and harmful to your health. There is a risk of injury. When cleaning the interior, open the doors or windows. Only use products intended for cleaning vehicles. Follow the instructions on the packaging.

## Vehicle paintwork

### General information

Regular vehicle care contributes to driving safety and value retention. Environmental influences in areas with elevated air pollution or natural contaminants, such as tree resin or pollen, can affect the vehicle paintwork. Tailor the frequency and extent of the vehicle care to these influences.

Corrosive substances such as oil, grease or bird droppings, must be removed immediately to prevent the finish from being altered or discolored.

### Matte paintwork

Only use cleaning and care products suitable for vehicles with matte paintwork.

### Leather care

Remove dust from the leather regularly, using a cloth or vacuum cleaner.

Otherwise, particles of dust and road grime chafe in pores and folds, and lead to heavy abrasion and premature degradation of the leather surface.

To guard against discoloration, such as from clothing, clean leather and provide leather care roughly every two months.

Clean light-colored leather more frequently because contamination on such surfaces is substantially more visible.

Use leather care products; otherwise, dirt and grease will gradually break down the protective coating of the leather surface.

### Synthetic leather care

Clean synthetic leather regularly with a damp microfiber cloth or vacuum cleaner.

Otherwise, dust and road grime particles will rub into pores and folds, causing significant abrasion and premature degradation of the surface.

In case of major soiling, use a moist soft sponge or microfiber cloth with suitable interior cleaners.

Immediately remove aggressive substances such as sunscreen to prevent the synthetic leather from being altered or discolored.

### Upholstery material care

#### General information

Vacuum the cushions regularly with a vacuum cleaner.

If upholstery is very contaminated, for instance with beverage stains, use a soft sponge or microfiber cloth with a suitable interior cleaner.

Clean the cushions down to the seams using large sweeping motions. Avoid rubbing the material vigorously.

### Safety information

#### NOTICE

Open hook and loop fasteners on articles of clothing can damage the seat covers and other cloth upholstery in the vehicle. There is a risk of damage to property. Ensure that any Velcro® fasteners are closed.

## Caring for special components

### Light-alloy wheels

When cleaning the vehicle, use only neutral rim cleaners having a pH value from 5 to 9. Do not use abrasive cleaning agents or steam cleaners above 140 °F/60 °C. Follow the manufacturer's instructions.

Aggressive, acidic or alkaline cleaning agents can destroy the protective coating of adjacent components, such as the brake disk.

After cleaning, apply the brakes shortly to dry them. The heat generated during braking dries brake disks and brake pads and protects them against corrosion.

### Chrome surfaces

Carefully clean components such as the radiator grille or door handles with plenty of water, if necessary, with auto shampoo added, particularly when they have been exposed to road salt.

### Rubber components

Environmental influences can cause surface contamination of rubber parts and a loss of gloss. Use only water and suitable cleaning agents for cleaning.

Treat especially worn rubber parts with rubber care products at regular intervals. When cleaning rubber seals, do not use any silicon-containing vehicle care products in order to avoid damage or noises.

### Wiper blades

The wiper blades are cleaned by using the washer system.

Avoid cleaning the wiper blades manually, as this may reduce wiper performance.

### Fine wood parts

Clean fine wood facing and fine wood components only with a moist rag. Then dry with a soft cloth.

### Plastic components

#### NOTICE

Solvent cleaners that contain alcohol or solvents, such as lacquer thinners, cold cleaning agents, fuel and such, can damage plastic parts. There is a risk of damage to property. Clean with a microfiber cloth. Dampen the cloth lightly with water, if needed.

Do not soak the headliner.

### Seat belts

#### Warning

Chemical solvent cleaners can destroy the seat belt fabric. Missing protective effect of the seat belts. There is a risk of injury or danger to life. Use only a mild soap solution for cleaning the seat belts.

Dirty belt straps impede the reeling action and thus have a negative impact on safety.

Use only a mild soap solution, with the seat belts clipped into their buckles.

Seat belts should only be allowed to retract if they are dry.

### Carpets and floor mats

#### Warning

Objects in the driver's footwell can limit the pedal travel or block a depressed pedal. There is a risk of accident. Stow objects in the vehicle such that they are secured and cannot enter into the driver's footwell. Use

floor mats that are suitable for the vehicle and can be safely attached to the floor. Do not use loose floor mats and do not layer several floor mats. Make sure that there is sufficient clearance for the pedals. Ensure that the floor mats are securely fastened again after they were removed, for instance for cleaning.

Floor mats can be removed from the car's interior for cleaning.

If the floor carpets are very contaminated, clean with a microfiber cloth and water or a textile cleaner. To prevent matting of the carpet, rub back and forth in the driving direction only.

### Sensor/camera lenses

To clean sensors and camera lenses, use a cloth moistened with a small amount of glass detergent.

### Displays/Screens/Projection screen

#### NOTICE

Chemical solvent cleaners, moisture or fluids of any kind can damage the surface of displays and screens. There is a risk of damage to property. Clean with a clean, antistatic microfiber cloth.

#### NOTICE

The surface of displays can be damaged with improper cleaning. There is a risk of damage to property. Avoid pressure that is too high and do not use any scratching materials.

Use a dry, clean antistatic microfiber cloth.

For stubborn soiling on the projection screen of the Head-up display, dampen the microfiber cloth with ethyl alcohol. Projection screen, refer to page [132](#).

# Technical data

## Vehicle features and options

This chapter describes all standard, country-specific and optional equipment offered with the series. It also describes features and functions that are not necessarily avail-

able in the vehicle, e.g., due to the selected options or country versions. This also applies to safety-related functions and systems. When using these functions and systems, the applicable laws and regulations must be observed.

## General information

The technical data and specifications in the Owner's Manual are used as guidance values. Vehicle-specific data may deviate from this, for instance due to the optional equipment chosen, national-market version, or country-specific measuring process. More

specific values can be obtained in approval documents, on the vehicle info label, or from an authorized service center or another qualified service center or repair shop.

## Dimensions

The dimensions can vary depending on the model version, equipment version or country-specific measurement procedure.

The height of the vehicle can also differ, e.g., due to tires and vehicle load.

### MINI Cooper SE

Width with mirrors	in/mm	75.9/1,928
Width without mirrors	in/mm	68/1,727
Height	in/mm	56.4/1,432
Length	in/mm	151.7/3,854
Wheelbase	in/mm	98.2/2,495
Smallest turning radius diam.	ft/m	35.1/10.7



## Weights

MINI Cooper SE		
Approved gross vehicle weight	lbs/kg	3,913/1,775
Payload	lbs/kg	743/337
Approved front axle weight	lbs/kg	2,172/985
Approved rear axle weight	lbs/kg	1,929/875

# Appendix

Any updates to the Owner's Manual of the vehicle are listed here.

## Updates made after the editorial deadline

---

The following chapters were updated in the printed version of the Owner's Manual after the editorial deadline for the Integrated Owner's Manual in the vehicle had closed:

- Operation: Displays: Check Control: Indicator lights and warning lights: Red lights: Brake system.
- Operation: Displays: Check Control: Indicator lights and warning lights: Yellow lights: Antilock Braking System, brake system, and Dynamic Stability Control.
- Operation: Driving Stability Control systems: Antilock Braking System.
- Operation: Driving Stability Control systems: Dynamic Stability Control: Display on instrument cluster.



# Everything from A to Z

## Index

### A

- ABS, see Antilock Braking System 166
- Accelerator pedal positions 104
- Accessories and parts 9
- Accident, what to do 274
- ACC, see Cruise Control with Distance Control 171
- Accumulator, charging, see Vehicle, charging 228
- Acoustic Pedestrian Protection 105
- AC quick charging cable, see Mode 3 charging cable 231
- Activated charcoal filter 195
- Active Cruise Control 171
- Active Guard, see Intelligent Safety 153
- Adjusting menu contents, Central Information Display (CID) 41
- Adjustments, steering wheel 92
- Advance climate control, see Stationary climate control 195
- Airbags 141
- Airbags, indicator and warning light 143
- Air circulation, see Recirculated-air mode 194
- Air conditioning, climate 193
- Air distribution, manual 194
- Air drying, see air conditioning 193
- Air flow, automatic climate control 194
- Air outlets, see Ventilation 195
- Air pressure, tires 240
- Air vent, see Ventilation 195
- Alarm activation 77
- Alarm signal, high-voltage battery 62
- Alarm system 77
- Alarm triggering 77
- Alarm, unintentional 78
- All-season tires, see Winter tires 246
- All-season tires, tread 243
- Antifreeze, see Washer fluid 116
- Antilock Braking System 166
- Apps, see Owner's Manual for Navigation, Entertainment, Communication 6
- Aquaplaning 219
- Arrival time 130
- Artificial engine noise, see Acoustic Pedestrian Protection 105
- Ashtray 203
- Assistance when driving off, see Drive-off assistant 170
- Assistance with breakdown 269
- Audio, see Owner's Manual for Navigation, Entertainment and Communication 6
- Authorized service center, see MINI Roadside Assistance 269
- Automatic climate control 192
- Automatic control, headlight 136
- Automatic Curb Monitor, exterior mirror 91
- Automatic deactivation, front-seat passenger airbags 143
- Automatic deactivation, high-voltage system 63
- Automatic dimming, see Automatic High Beam Assistant 137
- Automatic headlight control 136
- Automatic High Beam Assistant 137
- Automatic locking 76
- Automatic Parking Assistant 186
- Automatic program, automatic climate control 193
- Automatic unlocking 77
- AUTO program, automatic climate control 193
- AUTO program, intensity 194
- Average consumption 129
- Average speed 129
- Axle loads, approved 281

**B**

Backrest curvature, see Lumbar support 84  
Backrest, seats 83  
Bad weather light 138  
Battery, charge state indicator 119  
Battery, charging see Vehicle, charging 228  
Battery, disposing of 267  
Battery high-voltage system, long stationary periods 238  
Battery, vehicle 266  
Being towed, see Towing 272  
Belts, see Seat belts 86  
Beverage holder, see Cup holders 211  
Blower 194  
Bluetooth connection 52  
Bottle holder, see Cup holders 211  
Brake assistant 166  
Brake disks, break-in 218  
Brake disks, see Brake system 218  
Brake pads, break-in 218  
Brake pads, see Brake system 218  
Brake system 218  
Braking, information 219  
Breakdown assistance 269  
Break-in 218  
Brightness, control display 49  
Bulb replacement 264  
Bulb replacement, rear 265  
Bulbs and lights 264  
Buttons on the steering wheel 32  
Button, SOS, see Intelligent emergency call 270  
Button, Start/Stop 99  
Bypassing, see Jump-starting 271

**C**

Calendar day, see Date 47  
California Proposition 65 Warning 9  
Camera-based assistance systems, see Intelligent Safety 153  
Camera lenses, care 279  
Camera, rearview camera 183

Can holder, see Cup holders 211  
Care 275  
Care, displays, screens 279  
Care, light-alloy wheels 278  
Care, vehicle 276  
Cargo 212  
Cargo area 212  
Cargo area, adapting size 216  
Cargo area, enlarging 214  
Cargo area lid 72  
Cargo area, storage compartments 214  
Cargo cover 213  
Cargo position, rear seat backrest 214  
Cargo, stowing and securing 212  
Cargo straps 213  
Car key, see Vehicle key 64  
Carpet, care 278  
Car wash 275  
Car wash, automatic 275  
CBS, see Condition Based Service 261  
Cell phone, see Owner's Manual for Navigation, Entertainment and Communication 6  
Center armrest 210  
Center console 34  
Central Information Display (CID) 36  
Central Information Display (CID), see Control display 39  
Central instrument cluster, LED ring 131  
Central locking system, unlocking, from inside 69  
Central screen, see Control display 39  
Changes, technical, see For Your Own Safety 9  
Change, wheels and tires 244  
Changing parts 263  
Changing wheels 251  
Charge state indicator, high-voltage battery 119  
Charging cable, Flexible Fast Charger 231  
Charging cable, high-voltage battery 231  
Charging cable, storing, see Storage 231  
Charging cradle 205  
Charging process display, see Charging screen 118  
Charging process, see Charging screen 118  
Charging screen 118

Charging, see Vehicle, charging 228  
 Charging smartphone, see Wireless charging tray 205  
 Charging status, indicator light on the charging socket outlet 234  
 Charging status indicator, see Charging screen 118  
 Charging tray for smartphones, see Wireless charging tray 205  
 Charging, vehicle 228  
 Chassis number, see Vehicle identification number 14  
 Check Control 120  
 Children, seating position 94  
 Children, transporting safely 94  
 Child restraint seats 94  
 Child restraint system 94  
 Child restraint systems, mounting 95  
 Child seat installation 95  
 Child seat, mounting 95  
 Child seat mountings LATCH 97  
 Child seats 94  
 Chrome parts, care 278  
 Cigarette lighter 203  
 City light braking function 157  
 Cleaning, displays, screens 279  
 Climate control 192  
 Clothes hooks 211  
 Coasting, rolling to a stop 105  
 Coat hooks 211  
 Comfort Access 70  
 Comfort entry 65  
 Compartments in the doors 210  
 Compass 201  
 Compatible devices, see Suitable devices 52  
 Compatible mobile phones 52  
 Compressor 248  
 Computer, see On-board computer 128  
 Condensation under the vehicle 220  
 Condensation, windows 195  
 Condition Based Service 261  
 Confirmation signal from the vehicle 77  
 Connection, electrical devices, see Sockets 203  
 Connections 51

Consumption display, average consumption 129  
 Contacts, see Owner's Manual for Navigation, Entertainment, Communication 6  
 Contact with water, high-voltage system 62  
 Continued driving with a flat tire, see Tire Pressure Monitor 145  
 Continued driving with flat tire, see Flat tire monitor 150  
 Control display 39  
 Control display, brightness 49  
 Controller 39  
 Control systems, driving stability 166  
 Convenient closing, vehicle key 66  
 Convenient opening, vehicle key 65  
 Coolant 0 , 259  
 Cooling, maximum 193  
 Cooling system 0 , 259  
 Cornering light 137  
 Corrosion, brake disks 220  
 Cosmetic mirror 203  
 Coupling, see Pairing 51  
 Courtesy lights during unlocking 65  
 Courtesy lights, locked vehicle 66  
 Cruise Control, see Cruise Control with Distance Control 171  
 Cruise Control with Distance Control 171  
 Cruise Control without Distance Control 177  
 Cup holder 211  
 Customer service, see Owner's Manual for Navigation, Entertainment, Communication 6  
 Customer Support 6

## D

Damage, tires 244  
 Dashboard 32  
 Dashboard, see Instrument cluster 117  
 Data memory 11  
 Data protection, settings 50  
 Data, see Personal data, deleting 50  
 Data, technical 280  
 Date 47  
 Date, display 125

- Daytime driving lights 137
- Daytime running lights 137
- DC charging cable 231
- DCC, see Cruise Control without Distance Control 177
- Defrosting, see Windows, defrosting 195
- Defrosting, windows 195
- Deleting, personal data 50
- Departure schedule, see Stationary climate control 195
- Departure time, pre-conditioning 196
- Destination distance 130
- Destination input 6
- Device, connecting 51
- Device list 51
- Device, registering 51
- Devices, suitable 52
- Diagnostic connection 262
- Diagnostic socket 262
- Digital clock 125
- Digital compass 201
- Dimensions 280
- Dimmable exterior mirrors 91
- Dimmable interior mirror 92
- Display charge state, high-voltage battery 119
- Display, charging status, indicator light on the charging socket outlet 234
- Display, date 125
- Display, electronic, instrument cluster 118
- Display for performance and energy recovery 119
- Display, GREEN Mode 224
- Display, iDrive 36
- Display in instrument cluster 130
- Display in the windshield, see Head-up display 132
- Display lighting, see Instrument lighting 139
- Display panel, see Instrument cluster 117
- Displays 117
- Displays, eDRIVE system 119
- Displays, high-voltage system 119
- Display, speed limiting function, see Speed Limit Info 127
- Disposal, coolant 260
- Disposal, vehicle battery 267
- Distance Control, see Cruise Control 171
- Distance to destination 130
- Distance Warning, see Park Distance Control 180
- Divided screen view, split screen 38
- Drive display 119
- Drive-off assistant 170
- Drive-off assistant, see Dynamic Stability Control 167
- Drive power, reduced 125
- Driver assistance, see Intelligent Safety 153
- Drive-ready state in detail 100
- Drive-ready state, turning off 103
- Drive-ready state, turning on 100
- Driver profiles 73
- Driver profiles, exporting profiles 75
- Driver profiles, importing profiles 75
- Driving Dynamics Control, see MINI Driving Modes switch 168
- Driving in detail 103
- Driving instructions, eDRIVE drivetrain 223
- Driving mode, GREEN 224
- Driving mode, GREEN Driving style analysis 226
- Driving modes 168
- Driving notes, break-in 218
- Driving notes, general 218
- Driving notes, things to remember when driving 218
- Driving on racetracks 221
- Driving program, configuring 169
- Driving, see Drive-ready state in detail 100
- Driving stability control systems 166
- Driving, Start/Stop button 99
- Driving style analysis 226
- Driving through water 219
- Driving tip, GREEN tip 225
- Driving tips, see General driving notes 218
- DSC, see Dynamic Stability Control 167
- DTC, see Dynamic Traction Control 168
- DVD, video, see Owner's Manual for Navigation, Entertainment, Communication 6

Dynamic Cruise Control, see Cruise Control 177

Dynamic Stability Control 167

Dynamic Traction Control 168

## E

eDRIVE drivetrain, driving instructions 223

eDRIVE, electric driving, see MINI eDRIVE 59

eDrive system, at a glance 0

eDRIVE system, displays 119

Electric drive, see Driving in detail 103

Electric driving, see MINI eDRIVE 59

Electric range 125

Electronic displays, instrument cluster 118

Electronic Stability Program ESP, see Dynamic Stability Control 167

E-mail, see Owner's Manual for Navigation, Entertainment, Communication 6

Emergency braking, see PostCrash – iBrake 164

Emergency call 270

Emergency service, see MINI Roadside Assistance 269

Emergency unlocking, transmission lock 103

Energy recovery, button 105

Energy recovery, displaying 119

Energy recovery, driving stability control systems 166

Engine compartment 256

Engine coolant 0 , 259

Engine noise, artificial, see Acoustic Pedestrian Protection 105

Entering a destination, see Owner's Manual for Navigation, Entertainment, Communication 6

Entering an address, navigation, see Owner's Manual for Navigation, Entertainment and Communication 6

Entertainment, see Owner's Manual for Navigation, Entertainment and Communication 6

Equipment, interior 198

ESP Electronic Stability Program, see Dynamic Stability Control 167

Exchange, wheels and tires 244

Exterior mirror 90

Exterior mirror, Automatic Curb Monitor 91

Exterior mirror, automatic dimming feature 91

External temperature display 124

External temperature warning 124

Eyes for securing cargo 213

## F

Failure message, see Check Control 120

Fan, see Air flow 194

Fastening seat belts, see Seat belts 86

Fatigue Alert 164

Fatigue warner, see Fatigue Alert 164

Fault indications, see Check Control 120

Fine wood parts, care 278

First-aid kit 269

Fish, MINIMALISM display 226

Flat tire, changing wheels 251

Flat tire, continued driving, see Flat tire monitor 150

Flat tire, continued driving, see Tire Pressure Monitor 145

Flat tire message, see Flat tire monitor 151

Flat tire message, see Tire Pressure Monitor 146

Flat tire monitor 150

Flat tire, repairing 247

Flat tire, see Flat tire monitor 150

Flat tire, see Tire Pressure Monitor 145

Flat tire warning light, see Flat tire monitor 151

Flat tire warning light, see Tire Pressure Monitor 146

Flexible Fast Charger 231

Floods, driving through 219

Floor carpet, care 278

Floor mats, care 278

Fold-away position, wiper 111, 115

Fold-out position 111, 115

Foot brake 219



Forward Collision Warning with city collision mitigation [154](#)  
 Forward Collision Warning with City light braking function [154](#)  
 Forward Collision Warning with collision mitigation [154](#)  
 For Your Own Safety [9](#)  
 Front airbags [141](#)  
 Front passenger's side exterior mirror, tilting down, see Automatic Curb Monitor [91](#)  
 Front passenger airbags, automatic deactivation [143](#)  
 Front-seat passenger airbag, indicator light [144](#)  
 Front seats [83](#)  
 Fuses [267](#)

## G

Garage door opener, see Integrated Universal Remote Control [198](#)  
 General driving notes [218](#)  
 General settings [47](#)  
 Glare shield, see Sun visor [203](#)  
 Glass sunroof, initialize the system [82](#)  
 Glass sunroof, see Panoramic glass sunroof [81](#)  
 Global Positioning System geolocation [48](#)  
 Glove compartment [209](#)  
 GPS geolocation, vehicle position [48](#)  
 GPS navigation, navigation, see Owner's Manual for Navigation, Entertainment, Communication [6](#)  
 GREEN+ - program, driving dynamics [169](#)  
 GREEN Mode [224](#)  
 GREEN - program, driving dynamics [169](#)  
 GREEN tip, driving tip [225](#)  
 Gross vehicle weight, approved [281](#)  
 Ground clearance [221](#)

## H

Handbrake, electric, see Parking brake, electric [106](#)

Hand-held transmitter, alternating code [199](#)  
 Hands-free device, see Owner's Manual for Navigation, Entertainment, Communication [6](#)  
 Hands-free system [6](#)  
 Hazard warning system [269](#)  
 Head airbag [142](#)  
 Headlight control, automatic [136](#)  
 Headlight flasher [108](#)  
 Headlight glass [265](#)  
 Headlights, care [276](#)  
 Headlights, turning up, dimming, see Automatic High Beam Assistant [137](#)  
 Headliner [35](#)  
 Head restraints and seats [83](#)  
 Head restraints, front [88](#)  
 Head restraints, rear [89](#)  
 Head-up display [132](#)  
 Head-up display, standard view [132](#)  
 Heated steering wheel [92](#)  
 Heavy cargo, stowing [212](#)  
 Height, vehicle [280](#)  
 High beams [108](#)  
 High-voltage battery, alarm signal [62](#)  
 High-voltage battery, charge state indicator [119](#)  
 High-voltage battery, discharge [224](#)  
 High-voltage battery, heated [106](#)  
 High-voltage battery, heavily discharged [105](#)  
 High-voltage battery, long stationary periods [238](#)  
 High-voltage battery, service life [238](#)  
 High-voltage system, automatic deactivation [63](#)  
 High-voltage system, contact with water [62](#)  
 High-voltage system, displays [119](#)  
 High-voltage system, safety [62](#)  
 High-voltage system, work [62](#)  
 Hills [220](#)  
 Hill start assistant, see Drive-off assistant [170](#)  
 Holder for beverages, see Cup holders [211](#)  
 Hold function in stationary vehicle [108](#)

HomeLink, see Integrated Universal Remote Control 198  
 Homepage, see Internet 7  
 Hood 257  
 Horn 32  
 Hour, see Time 47

**I**

iBrake – PostCrash 164  
 Ice warning, see External temperature warning 124  
 Icons 7  
 Icy roads, see External temperature warning 124  
 Identification marks, tires 241  
 Identification number, see Vehicle identification number 14  
 ID transmitter, see Vehicle key 64  
 Ignition key, see Vehicle key 64  
 Illuminated ring, central instrument cluster 131  
 Indicator and warning lights, see Check Control 120  
 Indicator light, front-seat passenger airbag 144  
 Indicator light on the charging socket outlet, see Display, charging status, indicator light on the charging socket outlet 234  
 Indicator light, see Check Control 120  
 Individual air distribution 194  
 Individual settings, see Driver profiles 73  
 Inductive charging, smartphone, see Wireless charging tray 205  
 Information 6  
 Initialization, see flat tire monitor 150  
 Input, iDrive 36  
 Installation of child restraint systems 95  
 Instrument cluster 117  
 Instrument cluster, electronic displays 118  
 Instrument lighting 139  
 Instrument panel, see Instrument cluster 117  
 Integrated key 69  
 Integrated Owner's Manual in the vehicle 6  
 Integrated Universal Remote Control 198

Intelligent emergency call 270  
 Intelligent Safety 153  
 Intended use 9  
 Intensity, AUTO program 194  
 Interior equipment 198  
 Interior lights 139  
 Interior lights during unlocking 65  
 Interior lights, locked vehicle 66  
 Interior mirror, automatic dimming feature 92  
 Interior mirror, compass 201  
 Interior mirror, manually dimmable 91  
 Interior motion sensor 78  
 Intermittent operation 110, 113  
 Interval indicator, service notifications 126  
 Interval mode 110, 113  
 In the vicinity of the center console 34  
 In the vicinity of the roofliner 35

**J**

Jack 254  
 Jacking points 254  
 Jacking points for the vehicle jack 254  
 Jam protection system, glass sunroof 82  
 Jam protection system, windows 80  
 Jump-starting 271

**K**

Keyless Go, see Comfort Access 70  
 Key, see Integrated key 69  
 Key, see Vehicle key 64  
 Knee airbag 142

**L**

Labeling 241  
 Label on recommended tires 245  
 Lane boundary 160  
 Lane departure warning 160  
 Lane threshold, warning 160  
 Language, setting 47  
 Lashing eyes 213  
 LATCH child seat mountings 97

Leather care 277  
LED headlights 264  
LED ring, central instrument cluster 131  
LEDs, light-emitting diodes 264  
Length, vehicle 280  
Letters and numbers, entering 37  
Level 1 charging cable, see Mode 2 charging cable 231  
Level 1 charging, see Mode 2 charging 235  
Level 2 charging cable, see Mode 3 charging cable 231  
Level 2 charging, see Quick charging 236  
Level 3 charging cable, see DC charging cable 231  
Light-alloy wheels, care 278  
Light-emitting diodes, LEDs 264  
Lighter 203  
Lighting 135  
Light replacement 264  
Light replacement, rear 265  
Lights 135  
Lights and bulbs 264  
Lights, care 276  
Light switch 135  
LIM button, see Manual Speed Limiter 162  
List, instrument cluster, see Selection lists 128  
List, notifications, see Notifications 49  
Load 213  
Loading 212  
Loading position 214  
Loading the cargo area, see Stowing cargo 212  
Local time, see Time 47  
Location, vehicle position 48  
Locking, automatic 76  
Locking, from inside 69  
Locking, settings 76  
Long stationary periods, high-voltage battery 238  
Low beams, operation 135  
Lower back support, see Lumbar support 84  
Luggage rack, refer to Roof bars 221  
Luggage straps 213  
Lumbar support 84

## M

Maintenance 261  
Maintenance recommendation, see Condition Based Service 261  
Maintenance, service notifications 126  
Maintenance system, MINI 261  
Make-up mirror 203  
Malfunction displays, see Check Control 120  
Malfunction, vehicle key 68  
Manual brake, electric, see Parking brake, electric 106  
Manual control, air distribution 194  
Manual control, air flow 194  
Manual operation, PDC Park Distance Control 181  
Manual operation, rearview camera 184  
Manual Speed Limiter 162  
Map update, see Owner's Manual for Navigation, Entertainment, Communication 6  
Matte paintwork 277  
Matt paint, care 277  
Maximum cooling 193  
Maximum speed, display, see Speed Limit Info 127  
Maximum speed, winter tires 246  
Mechanical key 69  
Medical supplies, see First-aid kit 269  
Menus, Central Information Display (CID) 40  
Messages, see Check Control 120  
Meters, see Instrument cluster 117  
Microfilter 195  
MID - program, driving dynamics 169  
MINI Connected, see Owner's Manual for Navigation, Entertainment, Communication 6  
MINI driving modes 168  
MINI eDRIVE 0  
MINI Electric Power Spoke 2-Tone 244  
MINI logo projection during unlocking 65  
MINI maintenance system 261  
MINIMALISM analyzer 226  
Minimum tread, tires 243  
MINI Roadside Assistance 269

Mirrors 90  
 Mobile phone, connecting 51  
 Mobile phone, see Owner's Manual for Navigation, Entertainment and Communication 6  
 Mobile phones, suitable 52  
 Mobile radio in the vehicle 219  
 Mobile Service, see MINI Roadside Assistance 269  
 Mobility System, see Tire repair set 247  
 Mode 2 charging 235  
 Mode 2 charging cable 231  
 Mode 3 charging cable 231  
 Mode 3 charging, see Quick charging 236  
 Mode 4 charging cable, see DC charging cable 231  
 Modifications, technical, see For Your Own Safety 9  
 Moisture in headlight, see Headlight glass 265  
 Monitoring of the high-voltage battery 62  
 Monitor, see Control display 39  
 Mounting of child restraint systems 95  
 MP3 player, see Owner's Manual for Navigation, Entertainment, Communication 6  
 Multi-function steering wheel 32  
 Multifunction steering wheel, buttons 32  
 Multimedia, see Owner's Manual for Navigation, Entertainment and Communication 6

**N**

Navigation, see Owner's Manual for Navigation, Entertainment and Communication 6  
 Neck restraints, front, see Head restraints, front 88  
 Neck restraints, rear, see Head restraints, rear 89  
 Neutral cleaner, see Light-alloy wheels, care 278  
 Notifications 49

**O**

OBD, see On-board diagnosis 262

Obstacle marking, rearview camera 185  
 Odometer 124  
 Old battery 267  
 On-board computer 128  
 On-board diagnosis 262  
 Onboard vehicle tool kit 263  
 On-call service, see MINI Roadside Assistance 269  
 Opening and closing 64  
 Opening, from inside 69  
 Operate tailgate with vehicle key 66  
 Operating concept Central Information Display (CID) operating concept 36  
 Operating menus, Central Information Display (CID) 36  
 Operation via the Controller 40  
 Operation via touchscreen 42  
 Operation via voice 44  
 Optional equipment, see Vehicle equipment 8  
 Outside temperature display 124  
 Overwintering, see Long-term vehicle storage 238

**P**

Paint, vehicle care 277  
 Paintwork 277  
 Pairing 51  
 Panic alarm, see Panic mode 78  
 Panic mode 78  
 Panoramic glass sunroof 81  
 Park Distance Control 180  
 Parked car ventilation, see Stationary climate control 195  
 Parked vehicle, condensation 220  
 Parking assistant 186  
 Parking Assistant, see Park Distance Control 180  
 Parking brake, electric 106  
 Parking lights 135  
 Parts and accessories 9  
 Pathway lighting 136  
 Pathway lines, rearview camera 185  
 Payload 213  
 Payload, technical data 281

- PDC, see Park Distance Control 180
- Pedestrian Collision Warning with City Collision Mitigation 157
- Pedestrian Protection, acoustic 105
- Pedestrian Warning with City Collision Mitigation 157
- Performance display 119
- Personal data, deleting 50
- Personal profile, see Driver profiles 73
- Physical units, see Units of measurement, setting 48
- Plastic parts, care 278
- PostCrash – iBrake 164
- Power failure 267
- Power interruption 267
- Power windows 79
- Pre-conditioning 195
- Pressure monitor, tire, see Tire Pressure Monitor 145
- Pressure, tires 240
- Pressure warning, see Flat tire monitor 150
- Pressure warning, see Tire Pressure Monitor 145
- Profiles, see Driver profiles 73
- Programmable memory buttons, Central Information Display (CID) 43
- Protective function, glass sunroof, see Jam protection system 82
- Protective function, windows, see Jam protection system 80
- Push-and-turn reel, see Controller 39
- ## Q
- Quick charging 236
- Quick charging cable, see Mode 3 charging cable 231
- ## R
- Racetrack operation 221
- Radiator fluid 0 , 259
- Radio, see Owner's Manual for Navigation, Entertainment and Communication 6
- Rain sensor 110, 113
- Range 125
- Range, increasing 222
- Ratchet straps 213
- Real Time Traffic Information, see Owner's Manual for Navigation, Entertainment, Communication 6
- Rear lights 265
- Rear seat backrests, folding down 214
- Rearview camera 183
- Rear-view mirror 90
- Rear-view mirror, exterior 90
- Rear window defroster 195
- Rear window wiper, operation 111, 114
- Rear wiper 111, 114
- Recirculated-air filter, see Microfilter/activated-charcoal filter 195
- Recirculated-air mode 194
- Recommended tire brands 245
- Recuperation, button 105
- Reduced drive power 125
- Remaining range, see Range 125
- Remote control, see Vehicle key 64
- Remote control, universal 198
- Remote services, see Owner's Manual for Navigation, Entertainment, Communication 6
- Renewal, wheels and tires 244
- Replace battery, vehicle key 67
- Replacement, wheels and tires 244
- Replacing parts 263
- Reporting safety malfunctions 15
- RES CNCL button, camera-based cruise control 171
- RES CNCL button, Cruise Control 177
- Reserve warning, see Range 125
- Reset, Tire Pressure Monitor 146
- Retreaded tires 245
- Roadside parking lights 136
- Rolling code hand-held transmitter 199
- Roof bars 221
- Roofliner 35
- Roof luggage rack, refer to Roof bars 221
- Route, navigation, see Owner's Manual for Navigation, Entertainment, Communication 6
- Rubber components, care 278

Runflat tires 246

## S

Safe braking 219

Safety of the high-voltage system 62

Safety systems, see Airbags 141

Screen, see Control display 39

Screwdriver, see Onboard vehicle tool kit 263

Sealing compound, see Tire repair set 247

Search for charging stations, see Owner's Manual for Navigation, Entertainment, Communication 6

Seat belt reminder for driver and front passenger seat, see Seat belts 87

Seat belt reminder for the rear seats 88

Seat belts 86

Seat belts, care 278

Seat heating, front 86

Seating position for children 94

Seats and head restraints 83

Seats, front 83

Securing, cargo 212

Selection list on the instrument cluster 128

Sensors, care 279

Service and warranty 10

Service life of high-voltage battery 238

Service notifications, display 126

Service notifications, see Condition Based Service 261

Servotronic 170

SET button, camera-based cruise control 171

SET button, Cruise Control 177

Set clock 47

Set day, see Date 47

Set time, see Time 47

Setting, control display 49

Settings, general 47

Settings, locking/unlocking 76

Settings, mirrors 90

Settings, seats and head restraints 83

Side airbag 141

Signaling, horn 32

Signals when unlocking, see Confirmation signals from the vehicle 77

Sitting safely 83

Slide/tilt glass roof 81

Smallest turning circle, vehicle 280

Smartphone, connecting 51

Smartphone, see Owner's Manual for Navigation, Entertainment and Communication 6

Smartphone, using via voice control 46

Snow chains 251

Sockets, electrical devices 203

Software update 57

Software, updating 57

SOS button, see Intelligent emergency call 270

Sound settings, see Owner's Manual for Navigation, Entertainment, Communication 6

Speed control, see Cruise Control 177

Speed Limit Device, see Speed Limiter 162

Speed limit, display, see Speed Limit Info 127

Speed Limiter 162

Speed Limit Info 127

Speed limit, see Speed Limiter 162

Speed, see Average speed 129

Speed warning 131

Split screen 38

SPORT program, driving dynamics 169

Stability control systems 166

Standard charging cable 231

Standard charging, see Mode 2 charging 235

Standard equipment, see Vehicle equipment 8

Standard view, Head-up display 132

Standby state 99

Stars, MINIMALISM display 226

Start/Stop button 99

Stationary climate control 195

Stations, AM/FM, see Owner's Manual for Navigation, Entertainment, Communication 6

Status control display, tires 145

- Status information, Central Information Display (CID) [37](#)
  - Status of Owner's Manual [8](#)
  - Status, vehicle [134](#)
  - Steering column adjustment [92](#)
  - Steering support, see Servotronic [170](#)
  - Steering wheel, adjusting [92](#)
  - Steering wheel, buttons [32](#)
  - Steering wheel heating [92](#)
  - Storage, charging cable [231](#)
  - Storage compartments [209](#)
  - Storage, tires [246](#)
  - Storing the vehicle [238](#)
  - Stowing, cargo [212](#)
  - Suitable devices [52](#)
  - Suitable mobile phones [52](#)
  - Summer tires, tread [243](#)
  - Sun visor [203](#)
  - Switches, see Dashboard [32](#)
  - Switch for driving dynamics [168](#)
  - System language, setting, see Language, setting [47](#)
  - System settings, see General settings [47](#)
- T**
- Tailgate [72](#)
  - Tail lights [265](#)
  - Taking the vehicle out of service [238](#)
  - Technical changes, see For Your Own Safety [9](#)
  - Technical data [280](#)
  - Telephone, see Owner's Manual for Navigation, Entertainment and Communication [6](#)
  - Teleservices, see Owner's Manual for Navigation, Entertainment, Communication [6](#)
  - Temperature, automatic climate control [192](#)
  - Temperature display for external temperature [124](#)
  - Text message, Check Control [120](#)
  - Theft alarm system, see Alarm system [77](#)
  - Thigh support [85](#)
  - Tilt alarm sensor [78](#)
  - Tilting down, front passenger's side exterior mirror, see Automatic Curb Monitor [91](#)
  - Time [47](#)
  - Time of day, see Time [47](#)
  - Tire brands, recommended [245](#)
  - Tire change [244](#)
  - Tire damage [244](#)
  - Tire identification marks [241](#)
  - Tire inflation pressure [240](#)
  - Tire marking [241](#)
  - Tire pressure [240](#)
  - Tire Pressure Monitor [145](#)
  - Tire pressure monitoring, see Flat tire monitor [150](#)
  - Tire Pressure Monitor, reset [146](#)
  - Tire pressure, tires [240](#)
  - Tire pressure warning, see Flat tire monitor [150](#)
  - Tire repair set [247](#)
  - Tires [240](#)
  - Tire sealant, see Tire repair set [247](#)
  - Tires, run-flat [246](#)
  - Tire tread [243](#)
  - Tool [263](#)
  - Touchscreen [42](#)
  - Towing [272](#)
  - Traction Control [168](#)
  - Traction control system, see Dynamic Stability Control [167](#)
  - TRACTION, see Dynamic Traction Control [168](#)
  - Traffic bulletins, see Owner's Manual for Navigation, Entertainment, Communication [6](#)
  - Transmission lock, electronic unlocking [103](#)
  - Transporting children safely [94](#)
  - Tread, tires [243](#)
  - Trip computer [130](#)
  - Triple turn signal activation [108](#)
  - Trip odometer [124](#)
  - Trip recorder, see Trip odometer [124](#)
  - Trunk, see Cargo area [212](#)
  - Turn indicators, see Turn signals [108](#)
  - Turning circle lines, rearview camera [185](#)
  - Turning circle, vehicle [280](#)
  - Turning off, drive-ready state [103](#)
  - Turning on, drive-ready state [100](#)

Turn signal, indicator light 122  
 Turn signals, operation 108  
 Turn signals, rear, bulb replacement 265

U

Unintentional alarm, avoiding 78  
 Units of measurement, setting 48  
 Units, see Units of measurement, setting 48  
 Universal remote control 198  
 Unlocking, automatic 77  
 Unlocking, settings 76  
 Updates made after the editorial deadline 8  
 Updating, software 57  
 Upholstery care 277  
 Upper retaining strap, top tether 98  
 USB connection 54  
 USB port, position in vehicle 204  
 Used battery, disposing of 267  
 Use, intended 9

V

Vanity mirror 203  
 Vehicle battery 266  
 Vehicle breakdown, see Breakdown assistance 269  
 Vehicle, break-in 218  
 Vehicle care 276  
 Vehicle care products 276  
 Vehicle, charging 228  
 Vehicle equipment 8  
 Vehicle identification number 14  
 Vehicle issues 269  
 Vehicle jack 254  
 Vehicle key 64  
 Vehicle key, additional 67  
 Vehicle key, loss 67  
 Vehicle key, malfunction 68  
 Vehicle key, replace battery 67  
 Vehicle paint, care 277  
 Vehicle paintwork 277  
 Vehicle position, vehicle location 48  
 Vehicle status 134

Vehicle storage 238  
 Vehicle tracking 48  
 Ventilation 195  
 Venting, see Stationary climate control 195  
 Venting, see Ventilation 195  
 VIN, see Vehicle identification number 14  
 Voice activation system 44  
 Voice control 44  
 Voice recognition 44  
 Volume, see Owner's Manual for Navigation, Entertainment, Communication 6

W

Warning and indicator lights, see Check Control 120  
 Warning displays, see Check Control 120  
 Warning messages, see Check Control 120  
 Warning triangle 269  
 Warranty 9  
 Warranty Booklet, see Warranty 9  
 Washer fluid 116  
 Washer nozzles, windshield 111, 114  
 Washing the vehicle 275  
 Washing, vehicle 275  
 Water, high-voltage system 62  
 Water on roads 219  
 Website 7  
 Weights 281  
 Welcome lights 136  
 Welcome lights during unlocking 65  
 Wheelbase 280  
 Wheel base, vehicle 280  
 Wheel change 251  
 Wheels 240  
 Wheels and tires, exchange 244  
 Width, vehicle 280  
 Windows, powered 79  
 Windshield cleaning system, see Wiper system 109, 112  
 Windshield washer fluid, see Washer fluid 116  
 Windshield washer nozzles 111, 114  
 Windshield wipers, see Wiper system 109, 112



Winter storage, see Long-term vehicle storage [238](#)

Winter tires, suitable tires [246](#)

Winter tires, tread [243](#)

Wiper blades, changing [263](#)

Wiper fluid, see Washer fluid [116](#)

Wiper, fold-away position [111](#), [115](#)

Wipers, see Wiper system [109](#), [112](#)

Wiper system [109](#), [112](#)

Wireless charging, smartphone, see Wireless charging tray [205](#)

Wireless charging tray for smartphones [205](#)

Wood parts, care [278](#)

Wordmatch principle [37](#)

Word match principle, navigation [37](#)

Work, high-voltage system [62](#)

Working in, engine compartment [257](#)

Wrench, see Onboard vehicle tool kit [263](#)

---

01405A7D6C6 ue



# California Proposition 65 Warning

---

For vehicles sold in California:

## California Proposition 65 Warning



### **WARNING**

Operating, servicing and maintaining a passenger vehicle or off-highway motor vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle. For more information go to [www.P65Warnings.ca.gov/passenger-vehicle](http://www.P65Warnings.ca.gov/passenger-vehicle).

# MINI MOTORER'S GUIDE APP.

## YOUR DIGITAL VEHICLE INFORMATION.

The MINI Motorer's Guide app explains the equipment of your vehicle and offers further scopes and functions:



All information surrounding navigation, entertainment and communication

Photorealistic animations for various vehicle functions

Keyword search

360° view: Explore your vehicle interactively inside and out

Smart Scan for Apple iPhone: Icon and optical character recognition on the buttons in the vehicle

Available in more than 30 languages



Can be used offline after download



01405A7D6C6 ue